
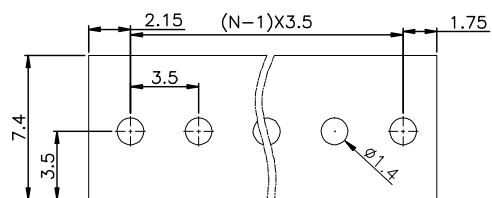



N=Number of confacts

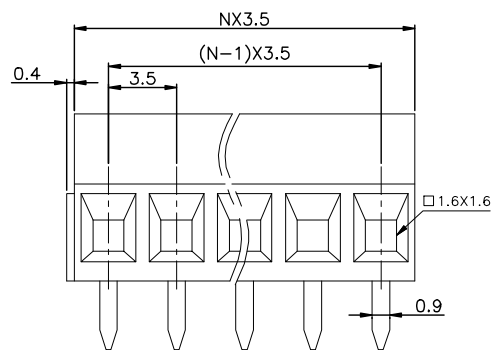

P.C.B LAYOUT

Specifications
 Voltage rating:300VAC
 Current rating:10 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 16-30AWG
 Mechanical:
 Torque:2.0kgf.cm/M2
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information


C XZA106 - XX XX A 001 E X Z X
 No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Gray 7=Blue G=Green Standard Packing R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.



GENERAL TOLERANCE

X.±5.0' X.±0.50
 .X'±3.0' .X±0.30
 .XX'±2.0' .XX±0.20
 .XXX'±1.0' .XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZA106-CA1EZ

PART NO.

CXZA106-XXXXA001EXZX

TITLE.

Pitch 3.5mm series