
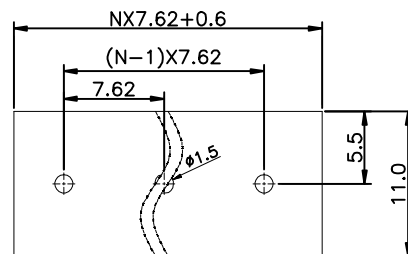
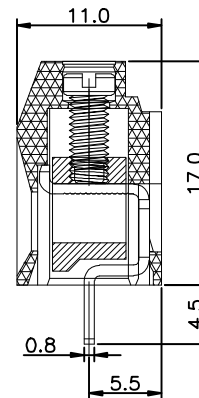
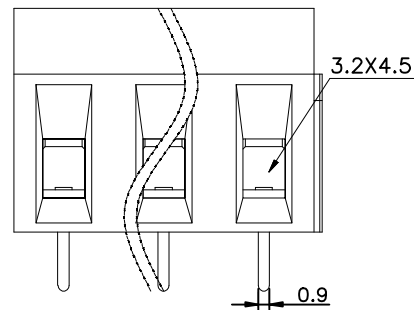


N=Number of confacs

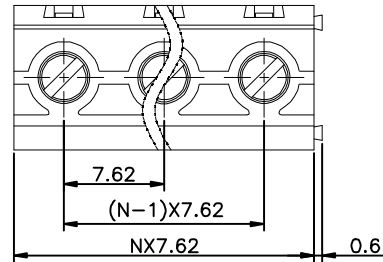

P.C.B LAYOUT

Specifications
Voltage rating:300VAC
Current rating:30 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: 2500VAC(1min)
Test time:60sec/1pcs
wire range: 10-26AWG
Mechanical:
Torque:8.0kgf.cm/M3
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

CXZA106 - XX XX A 005 E X B X

No. Of Pins Per Row
02~24

Standard Plating
01=Tin

Color
7=Blue
G=Green

Standard Packing
R=Cartons



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1

3RD.ANG
PROJ.

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZA106-CA005EB

PART NO.

CXZA106-XXXXA005EXBX

TITLE.

Pitch 7.62mm Series