

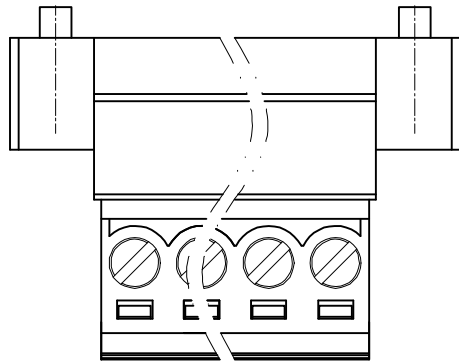


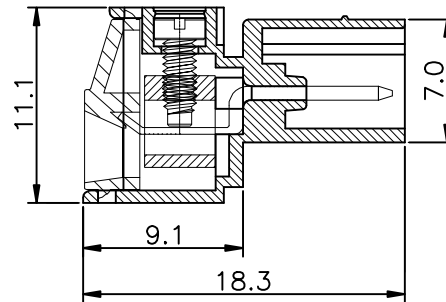

Specifications  
 Voltage rating: 300VAC  
 Current rating: 12 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)Test time:60sec/1pcs  
 Wire range: 16-24AWG  
 Mechanical:  
 Torque:2.5kgf.cm/M2  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

N=Number of confacts

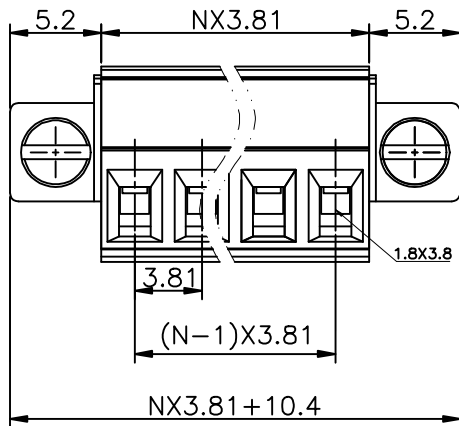

## Ordering Information

CXZA114 - XX XX A 002 E X B X


No.of Pins Per Row 02~24 Standard Plating 01=Tin Color 6=Grey 7=Blue G=Green Standard Packing R=Cartons



Website:www.greenconn.com  
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG  
 PROJ.



### GENERAL TOLERANCE

|            |          |
|------------|----------|
| X.±5.0'    | X.±0.50  |
| .X'±3.0'   | .X±0.30  |
| .XX'±2.0'  | .XX±0.20 |
| .XXX'±1.0' | .XXX±/   |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZA114-CA002EB

PART NO.

CXZA114-XXXXA002EXBX

TITLE.

Pitch3.81mm-series  
 (With flange screw)