




N=Number of confacs

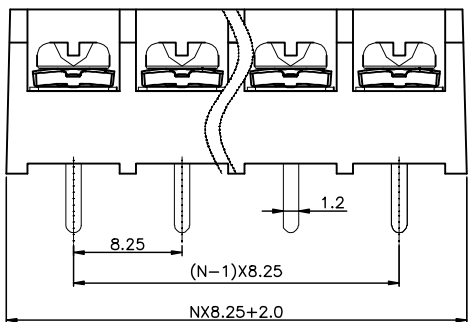

Specifications
 Voltage rating:300VAC
 Current rating:20 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 12-22AWG
 Mechanical:
 Torque:10kgf.cm/M3
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

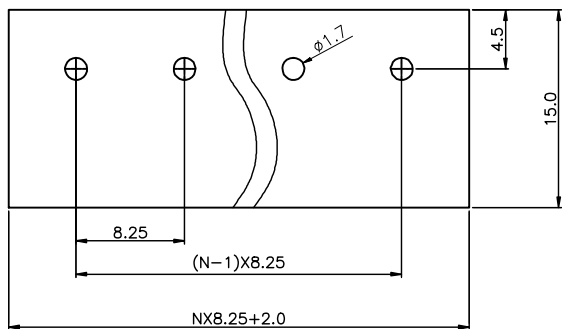

P.C.B LAYOUT

Ordering Information

C XZA115 - XX XX A 002 E X B X

No. of Pins per Row 02~32
 Standard Plating 01=Tin
 Color 1=Black
 Standard Packing R=Carton Selective Packing N=PE Bag



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.

CXZA115-CA002

PART NO.

CXZA115-XXXXA002EXBX

TITLE.

Pitch 8.25mm series
 without flange