

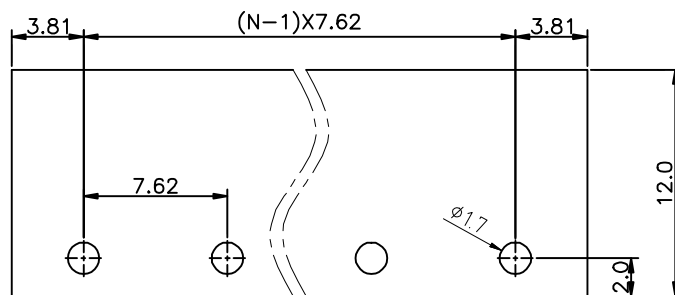


N=Number of conctacs

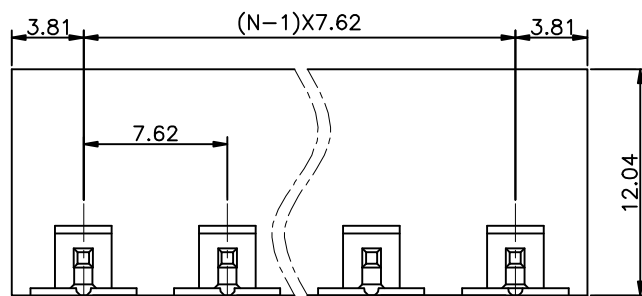

PCB.LAYOUT

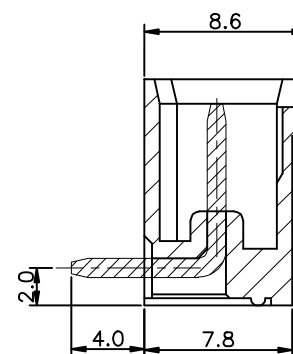

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C XZB102 - XX XX A 001 E X Z X

No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.
 3/4

GENERAL TOLERANCE

X.±5.0' X.±0.50
 .X'±3.0' .X±0.30
 .XX'±2.0' .XX±0.20
 .XXX'±1.0' .XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZB102-CA1EZ

PART NO.

CXZB102-XXXXA001EXZX

TITLE.

pitch 7.62mm - series