
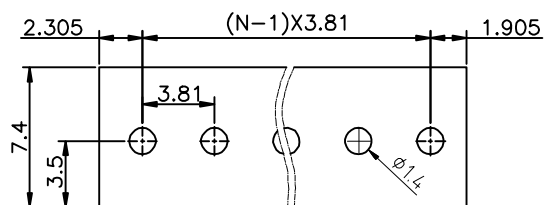



N=Number of contacfs

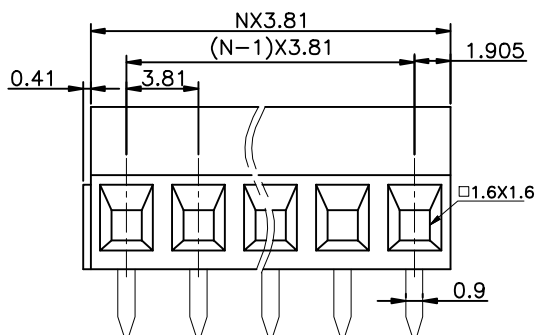

P.C.B LAYOUT

Specifications  
Voltage rating:300VAC  
Current rating:10 Amps/way max  
Contact resistance: 20mΩ(max)  
Insulation resistance: 5000MΩ/1000V  
Withstanding Voltage: 2500VAC(1min)  
Test time:60sec/1pcs  
wire range: 16-30AWG  
Mechanical:  
Torque:2.0kgf.cm/M2  
Operating temperature:-40°C to+105°C  
Materials  
Contact Material:Brass  
Insulator Material: UL 94V-0 PA66  
All materials must meet GREENCONN  
hazardous substances control standards.

## Ordering Information

C XZB103 - XX XX A 001 E X Z X

No. of Pins per Row 02~24      Standard Plating 01=Tin .....

Color 1=Black 7=Blue G=Green      Standard Packing R=Carton



Website:www.greenconn.com  
E-mail:sales@greenconn.com

REV. A    UNIT. mm    SCALE. 1:1    3RD.ANG PROJ.    PAGE. 1/1

### GENERAL TOLERANCE

|            |          |
|------------|----------|
| X.±5.0'    | X.±0.50  |
| .X'±3.0'   | .X±0.30  |
| .XX'±2.0'  | .XX±0.20 |
| .XXX'±1.0' | .XXX±/   |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZB103-CA1EZ

PART NO.

CXZB103-XXXXA001EXZX

TITLE.

pitch 3.81mm - series