


1 2 3 4 5 6 7 8 9

F

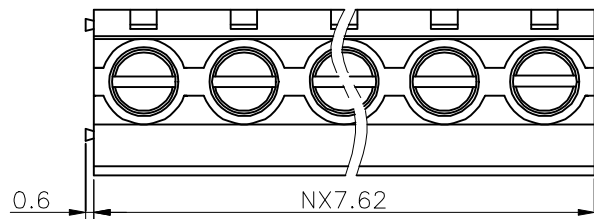


0.6 NX7.62


E

N=Number of contacts

D

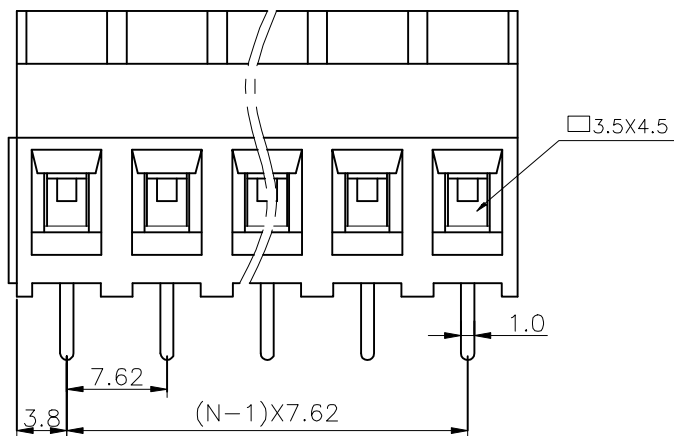


C

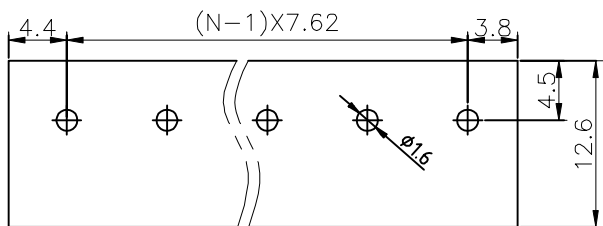

B

PCB LAYOUT

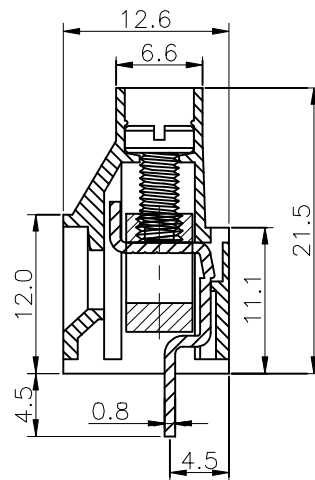

Specifications
 Voltage rating:300VAC
 Current rating:30 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 10-26AWG
Mechanical:
 Torque:8.0kgf.cm/M3
 Operating temperature:-40°C to+105°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C XZB104 - XX XX A 001 E X Z X

No. of Pins per Row 02/04/24 Standard Plating 01=Tin Color 7=Blue G=Green Standard Packing R=Carton

A



REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 CXZB104-CA1EZ
 PART NO.
 CXZB104-XXXXA001EXZX

TITLE.
 pitch 7.62mm - series

1 2 3 4 5 6 7 8 9