




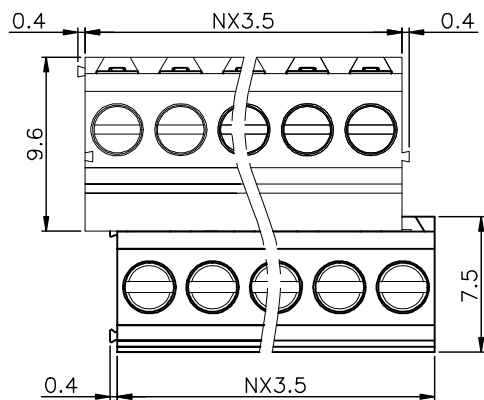


N=Number of contacts

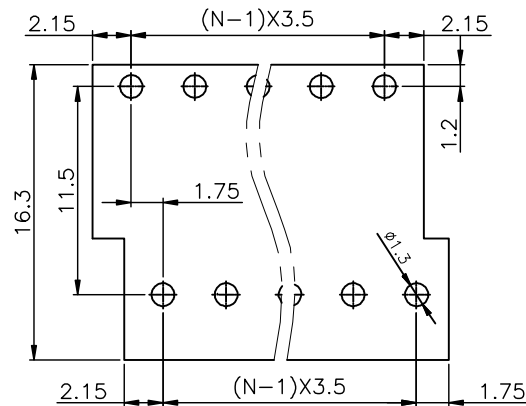

P.C.B.LAYOUT

Specifications
 Voltage rating:300VAC
 Current rating: 10 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs
 Wire range:16-30AWG
 Mechanical:
 Torque:2kg-cm/M2
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

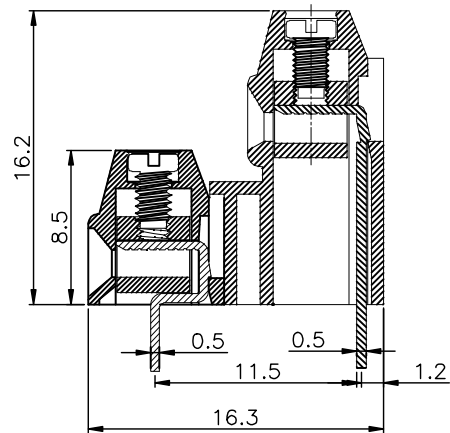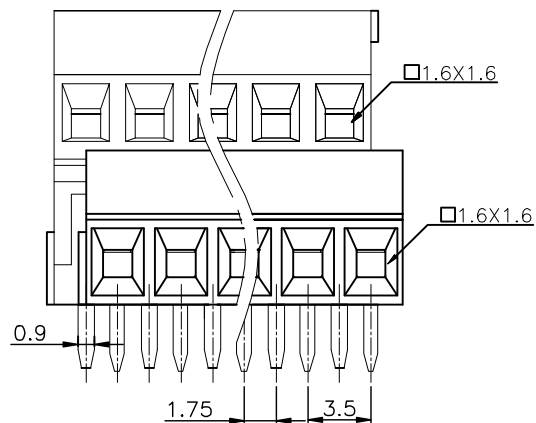

Ordering Information

CXZB207 - XX XX A 001 E X B X

No. of Pins per Row
02~24

Standard Plating
01=Tin
.....

Color
1=Black
7=Blue
G=Green

Standard Packing
R=Carton
Selective Packing
N=PE Bag



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.35
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZB207-CA001EB

PART NO.

CXZB207-XXXXA001EXBX

TITLE.

Pitch 3.5mm series