


1 2 3 4 5 6 7 8 9



F

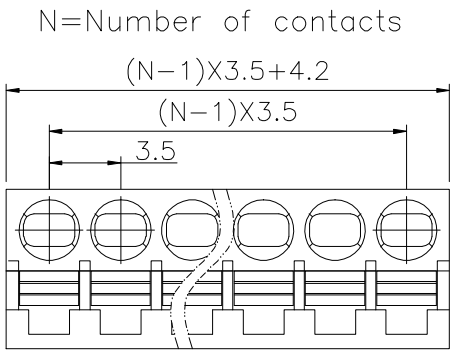

E

Specifications
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 16~24AWG
Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

D

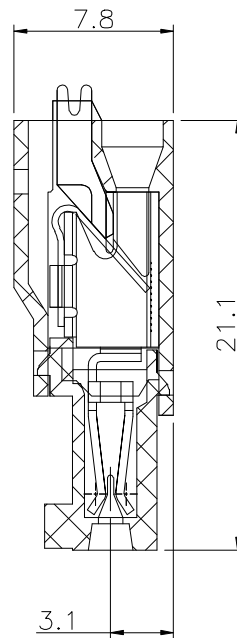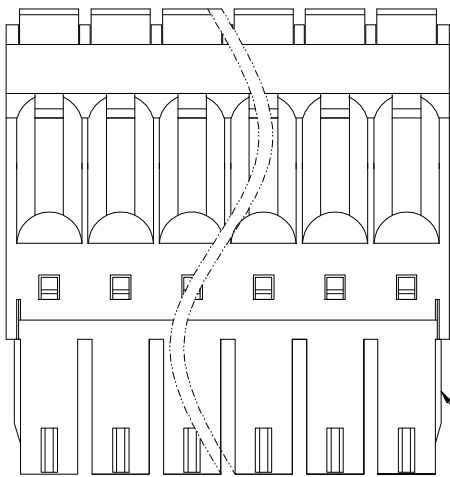


C

B

2p to 6p with wedge,above7p
 without wedge(including 7p)

Ordering Information

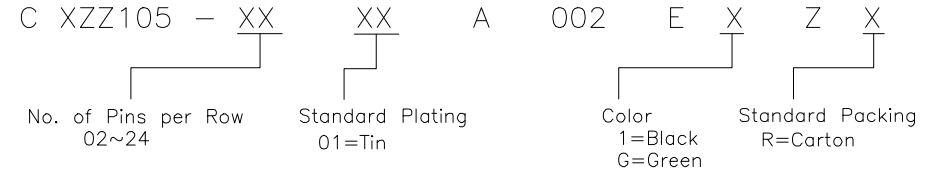

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>			3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. CXZZ105-CA2EZ	TITLE. pitch 3.5mm series
				X:±5.0'	X.±0.50			PART NO. CXZZ105-XXXXA002EXZX	
REV.	UNIT.	SCALE.	PAGE.	.X'±3.0'	.X±0.30				
01	mm	1:1	1/1	.XX'±2.0'	.XX±0.20				
				.XXX'±1.0'	.XXX±/				

1 2 3 4 5 6 7 8 9