

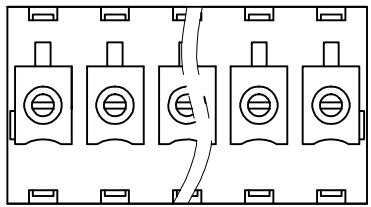


1 2 3 4 5 6 7 8 9

F

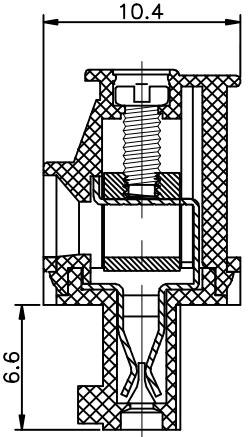


E

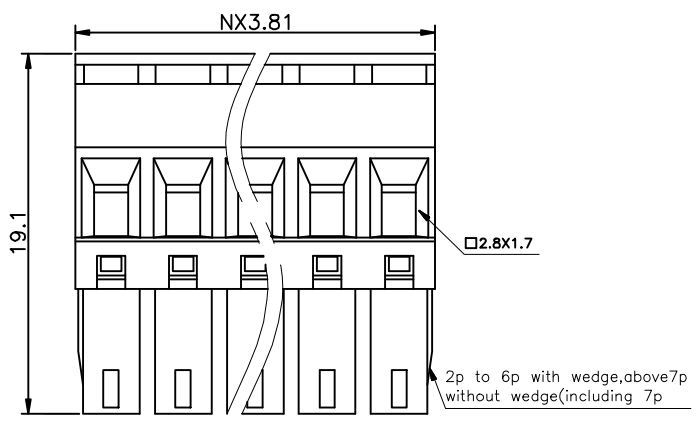

Specifications
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 16-24AWG
Mechanical:
 Torque:2.5kgf.cm/M2
 Operating temperature:-40°C to+105°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

C

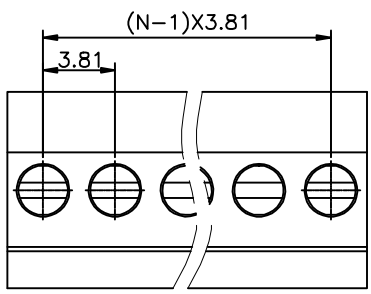

N=Number of confacts

Ordering Information

C XZZ105 - XX XX A 004 E X Z X

No. of Pins per Row: 02/04/20
 Standard Plating: 01=Tin,
 Color: 1=Black, 7=Blue, G=Green
 Standard Packing: R=Carton

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>			3RD.ANG PROJ. 	GENERAL TOLERANCE X:±5.0' X:±0.50 .X'±3.0' .X±0.30 .XX'±2.0' .XX±0.20 .XXX'±1.0' .XXX±/	DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. CXZZ105-CA4EZ PART NO. CXZZ105-XXXXA004EXZX	TITLE. pitch 3.81mm series
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1					

M9

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A