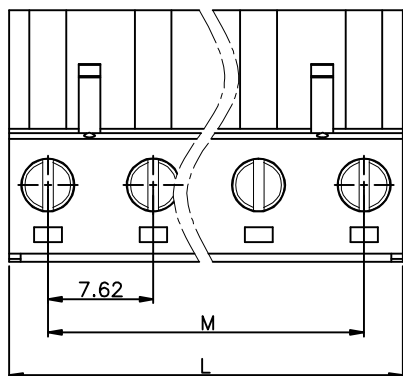


Specifications
 Current Rating:16Amp
 Insulation Resistance:5000MΩMin.
 Dielectric Withstanding Voltage:2500V AC
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

No. of PIN/ROW	Dimension Information	
	M	L
02	7.62	13.24
03	15.24	20.86
04	22.86	28.48
05	30.48	36.10
06	38.10	43.72
07	45.72	51.34
08	53.34	58.96
09	60.96	66.58
10	68.58	74.20
11	76.20	81.82
12	83.82	89.44
13	91.44	97.06
14	99.06	104.68
15	106.68	112.30
16	114.30	119.92
17	121.92	127.54
18	129.54	135.16
19	137.16	142.78
20	144.78	150.40
21	152.40	158.02
22	160.02	165.62
23	167.62	173.26
24	175.26	180.88

Ordering Information

C XZZ109 - XX XX A 002 E X Z X

No. of Pins per Row
02~24

Standard Plating
01=Tin
.....

Color
6=Gray
7=Blue
G=Green
1=Black

Standard Packing
R=Carton

Website:www.greenconn.com E-mail:sales@greenconn.com		
REV. 01	UNIT. mm	SCALE. 1:1

3RD.ANG PROJ.	
PAGE. 1/1	

GENERAL TOLERANCE	
X.'±2.0'	X.±0.50
.X'±/	.X±0.30
.XX'±/	.XX±0.20
.XXX'±/	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. CXZZ109-CA002EZ
PART NO. CXZZ109-XXXXA002EXZX

TITLE.
pitch 7.62mm - series