


1 2 3 4 5 6 7 8 9



F

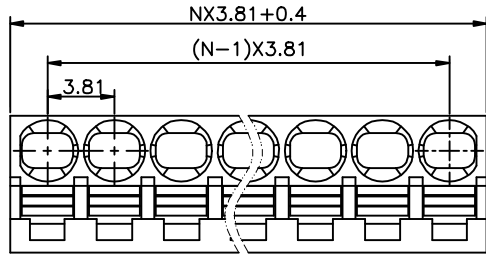

E

Specifications  
 Voltage rating:300VAC  
 Current rating:12 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)Test time:60sec/1pcs  
 Wire range: 16-24AWG  
 Mechanical:  
 Torque:/  
 Operating temperature:-40°C to +105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

D

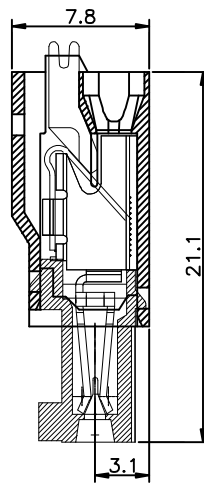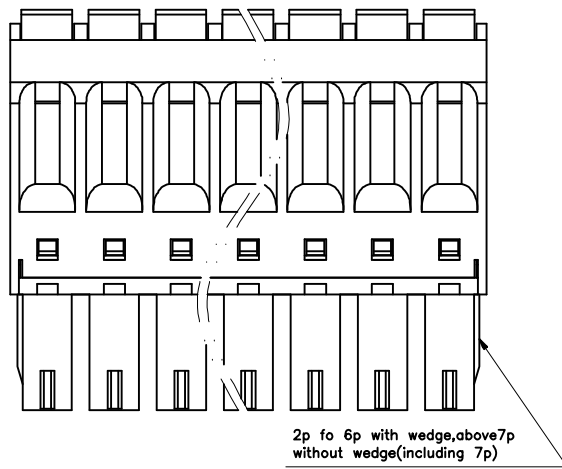

C

B

N=Number of contacfs

### Ordering Information

CXZZ124 - XX XX A 006 E X B X

No. of Pins Per Row 02~24      Standard Plating 01=Tin      Color 1=Black 6=Grey 7=Blue G=Green      Standard Packing R=Cartons

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE.
		X:±5.0'	X.±0.50	CHECKED:	DATE:	CXZZ124-CA006EB	
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X'±3.0'	.X±0.30	PART NO.	Pitch3.81m-series
				.XX'±2.0'	.XX±0.20	CXZZ124-XXXXA006EXBX	
				.XXX'±1.0'	.XXX±/	APPROVED:	DATE:

1 2 3 4 5 6 7 8 9