

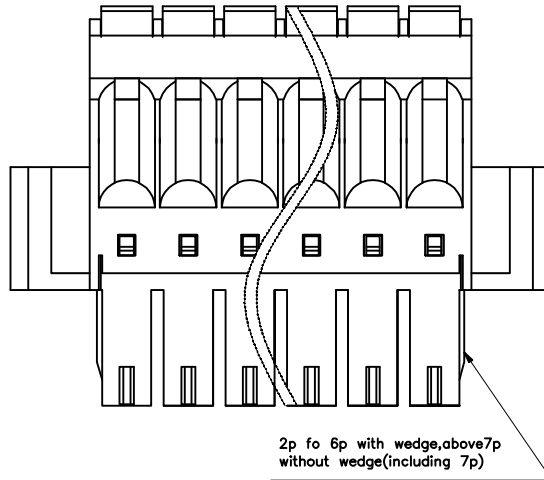


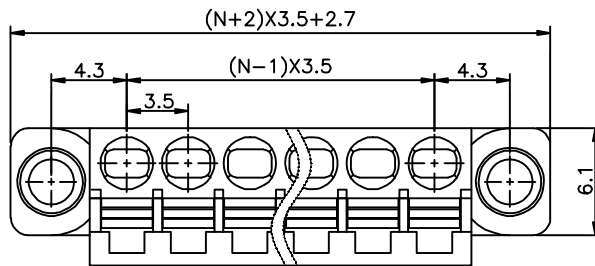

N=Number of contacfs

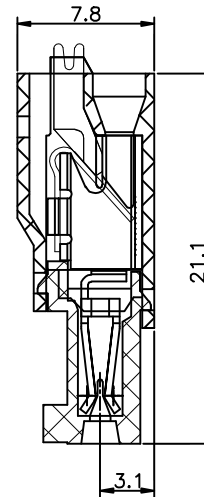

Specifications
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs
 Wire range: 16-24AWG
 Mechanical:
 Torque:/
 Operating temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

CXZZ124 - XX XX A 007 E X B X

No.of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Cartons



REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CXZZ124-CA007EB
PART NO.
CXZZ124-XXXXA007EXBX

TITLE.
Pitch3.5m-series