

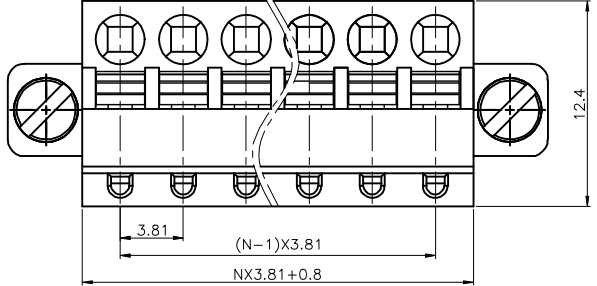


1 2 3 4 5 6 7 8 9

F

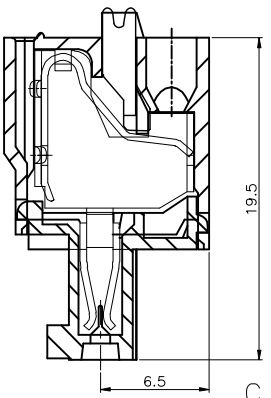

N=Number of contacts

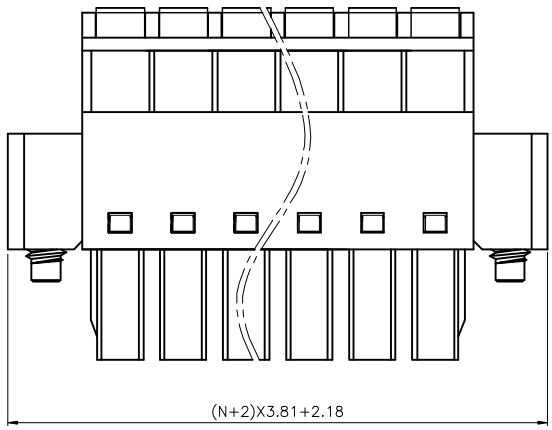

Specifications  
 Voltage rating:300VAC  
 Current rating: 12 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: /  
 Withstanding Voltage: 2500VAC(1min)  
 Test time:60sec/1pcs  
 Wire range: 16-24AWG  
 Mechanical:  
 Torque:/  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C XZZ124 - XX XX A 009 E X B X  
 No. of Pins per Row 02~24      Standard Plating 01=Tin .....  
 Color 1=Black 6=Gray 7=Blue G=Green  
 Standard Packing R=Carton Selective Packing N=PE Bag

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>			3RD.ANG PROJ.		GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CXZZ124-CA009EB	TITLE. Pitch 3.81mm series
					X:±5.0'	X:±0.50				
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X'±3.0'	.X±0.30	APPROVED:	DATE:	PART NO. CXZZ124-XXXXA009EXB		
				.XX'±2.0'	.XX±0.25					
				.XXX'±1.0'	.XXX±/					

1 2 3 4 5 6 7 8 9