


1 2 3 4 5 6 7 8 9



F

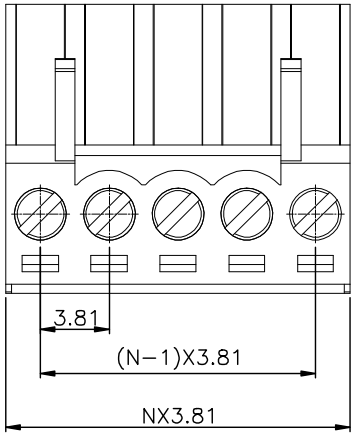

Specifications  
 Voltage rating:300VAC  
 Current rating: 12 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)Test time:60sec/1pcs  
 Wire range: 16-24AWG  
 Mechanical:  
 Torque: 2.5kgf.cm/M2  
 Operating temperature:-40°C to +105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

E

D

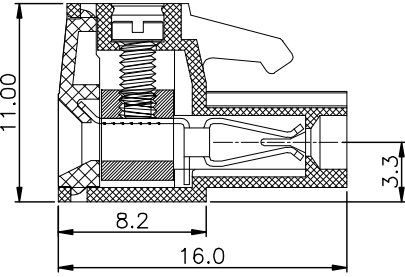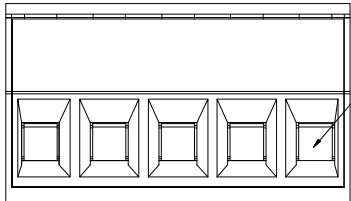

N=Number of contacts

Ordering Information

C XZZ127 - XX XX A 002 E X B X

No. of Pins per Row 02~24      Standard Plating 01=Tin .....

Color 1=Black 6=Gray 7=Blue G=Green      Standard Packing N=PE Bag Selective Packing R=Carton

B

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>		3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CXZZ127-CA002EB	TITLE. 3.81 Pitch Series Earless
			X:±5.0'	X:±0.50				
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X'±3.0'	.X±0.30	APPROVED:	DATE:	PART NO. CXZZ127-XXXXA002EXBX
				.XX'±2.0'	.XX±0.20			
				.XXX'±1.0'	.XXX±/			

1 2 3 4 5 6 7 8 9