

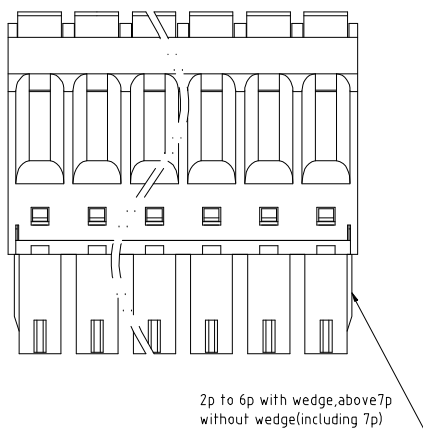


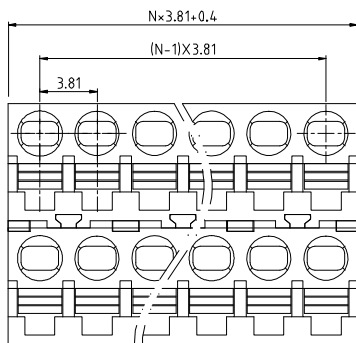

N=Number of contacts

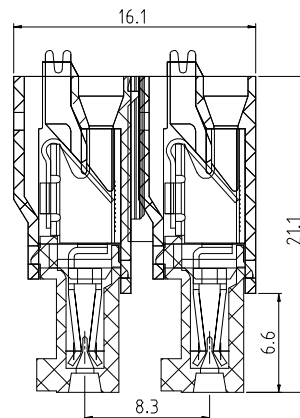

Specifications
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 16-24AWG
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C XZZ202 - XX XX A 005 E X B X
 No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Gray 7=Blue G=Green Standard Packing N=PE Bag Selective Packing R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.

GENERAL TOLERANCE

X. ± 5.0'	X. ± 0.50
.X' ± 3.0'	.X ± 0.35
.XX' ± 2.0'	.XX ± 0.25
.XXX' ± 1.0'	.XXX ± /

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZZ202-CA005EB

PART NO.

CXZZ202-XXXXA005EXBX

TITLE.

Pitch3.81mm series 無耳