


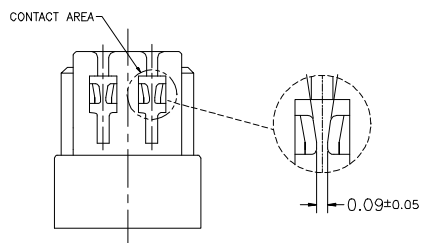



1 2 3 4 5 6 7 8 9



NOTE:
 1.MATERIAL:
 Housing: ThermalPlastic (UL94V-0)
 Terminal: Copper Alloy
 2.SPECIFICATION:
 Current Rating: 0.5A AC,DC (AWG#32)
 Voltage Rating: 30V (AC,DC)
 Contact Resistance: Initial: 30mΩ max
 After environmental: 40mΩ max
 Insulator Resistance: Initial: 100MΩ min
 After environmental: 100MΩ min
 Withstanding Voltage: 200v AC for 1 minute
 Temperature Range: -25°C~85°C
 Applicable Wire: AWG #32
 Insulation O.D.: $\phi 0.38 \pm 0.02$ mm

NO OF PINS/ROW	M	L1	L
2	0.80	1.78	2.40
3	1.60	2.58	3.20
4	2.40	3.38	4.00
5	3.20	4.18	4.80
6	4.00	4.98	5.60
7	4.80	5.78	6.40
8	5.60	6.58	7.20
9	6.40	7.38	8.00
10	7.20	8.18	8.80
11	8.00	8.98	9.60
12	8.80	9.78	10.40
13	9.60	10.58	11.20
14	10.40	11.38	12.00
15	11.20	12.18	12.80
16	12.00	12.98	13.60
17	12.80	13.78	14.40
18	13.60	14.58	15.20
19	14.40	15.38	16.00
20	15.20	16.18	16.80

Ordering Information

CZBZ102 - XX XX A 001 E X A X


No. of Pins per Row 02~20 Standard Plating 02=Gold Flash Selective Plating 01=Tin Housing E=PA66 ... Color 1=Black 2=White ... Standard Packing C=Tube Selective Packing A=Box N=PE Bag



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X: ±5.0'	X: ±/
.X' ±3.0'	.X ±0.30
.XX' ±2.0'	.XX ±0.25
.XXX' ±1.0'	.XXX ±0.15

DESIGNED:

DATE:

DWG. NO.

CZBZ102-CA001

CHECKED:

DATE:

PART NO.

CZBZ102-XXXXA001EXAX

APPROVED:

DATE:

TITLE.

0.8mm pitch Connector

1 2 3 4 5 6 7 8 9