

F

E

D

C

B

A

F





E

D



C

B

A

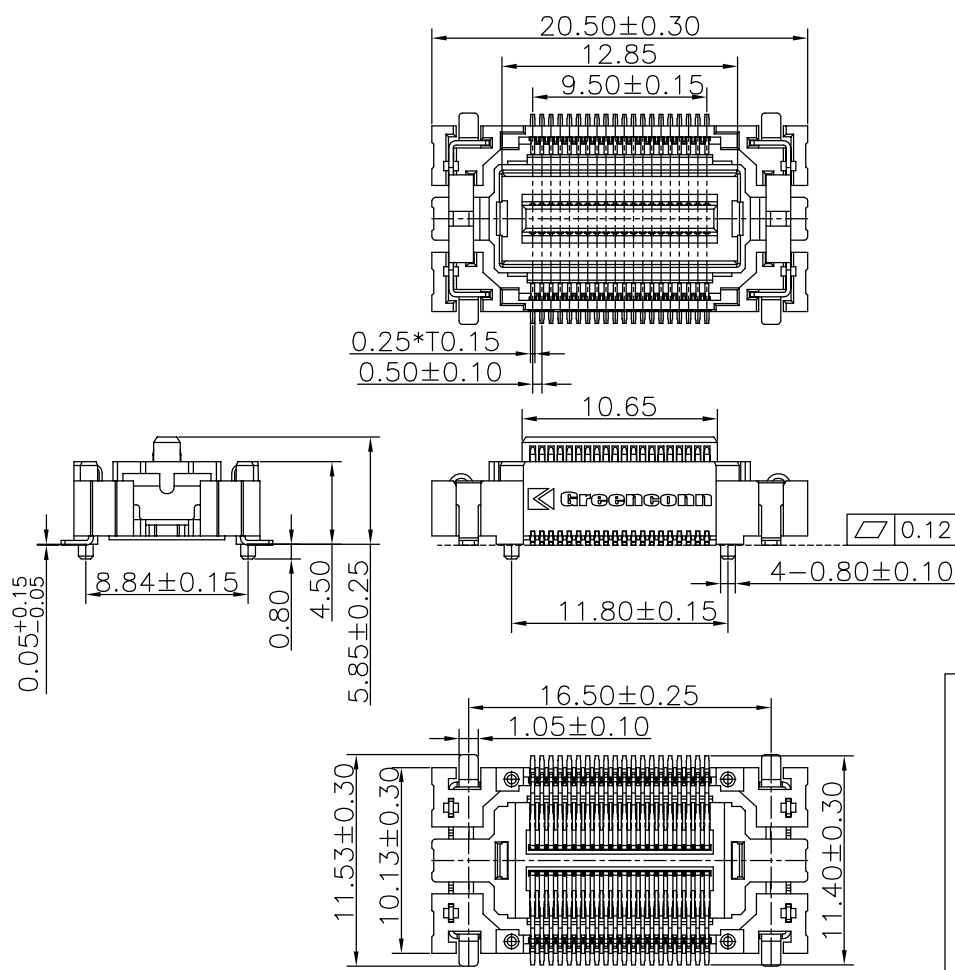

Specifications
Current Rating:0.4Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:250VAC/60S
Contact Resistance:100mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V−0 LCP or the equivalent material
★All materials must meet GREENCONN hazardous substances control standards.
“★”: Critical Characteristics, indicates product characteristics, functionalities, and manufacturing processes regarding to customer’s specifications
“☆”:Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

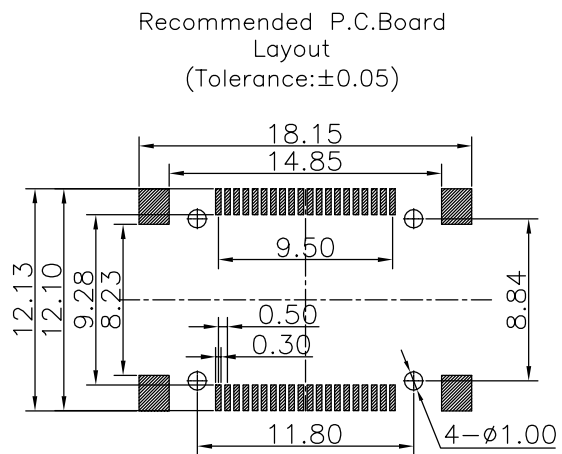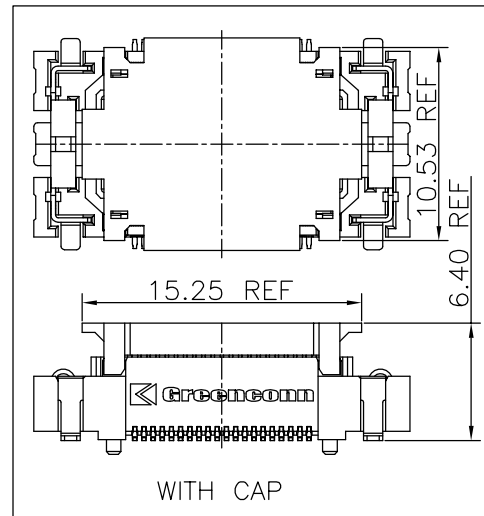

Ordering Information

G BAC229 - XX XX B 001 C 1 N X

No. of Pins per Row 20
Standard Plating 02=Gold Flash
Color 1=Black
Standard Packing F=CAP+Tape&Reel

格菱股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GBAC229-CB1CN	TITLE. 0.5mm PITCH BTB FLOATING CONNECTOR
EV.	UNIT.	SCALE.	PAGE.		X.*±5.0°	X.±0.30	CHECKED:	DATE:	PART NO. GBAC229-2002B001C1NF	
B	mm	2.5:1	1/1		.X*±3.0°	.X±0.25	CO SIGNED:	DATE:		
					.XX*±2.0°	.XX±0.15	APPROVED:	DATE:		
						.XXX*±1.0°	.XXX±0.10			