
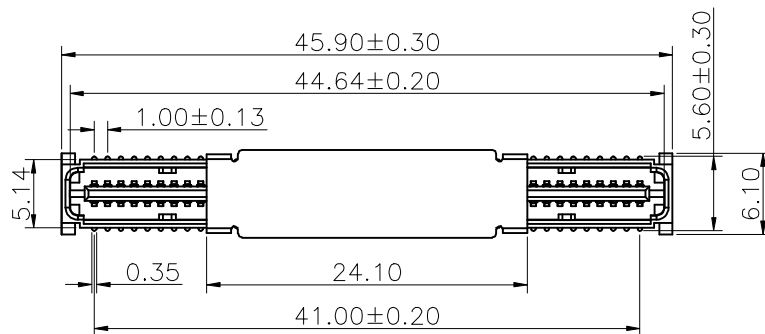


Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet Greenconn
 hazardous substances control standards.

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

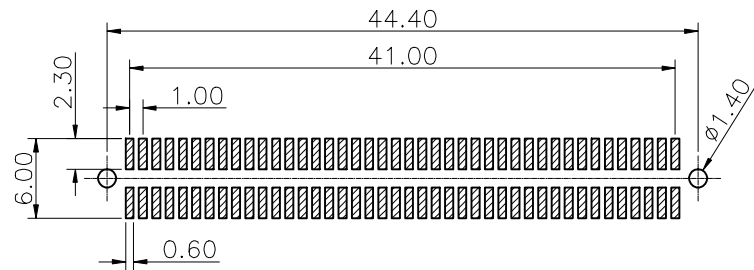

Ordering Information

GBCC210 - 42 XX B XXX C 2 A X

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code

No. of Pins per Row
 42

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Pin length
 See the drawing

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Insulator Material
 C=LCP

Color
 2=White

Contact Material
 A/S/K/T=Phosphor Bronze

Packing code
 C=Tube
 D=Tape&Reel
 E=Cap + Tube
 F=Cap+Tape&Reel

格菱股份有限公司
Greenconn Corporation

REV. 01				UNIT. mm		SCALE. 2:1		PAGE. 1/1		GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE.
										X:±5.0'	X:±0.30	CHECKED:	DATE:	GBCC210-CBXX	1.0mm PITCH BOARD TO BOARD MALE S.M.T TYPE
										.X'±3.0'	.X±0.25	CO SIGEND:	DATE:		
										.XX'±2.0'	.XX±0.15	APPROVED:	DATE:	PART NO.	
										.XXX'±1.0'	.XXX±0.10				GBCC210-42XX BXXX C2AX