
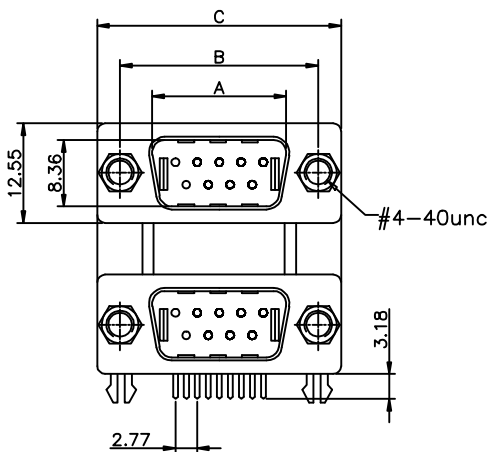


P.C.B LAYOUT

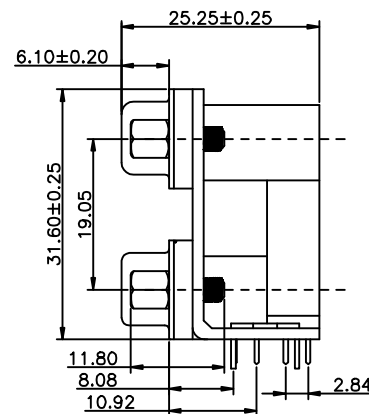

No.of Contact	A±0.25	B±0.13	C±0.38	D	E
9M/9M	16.92	24.99	30.81	11.08	6.96
15M/15M	25.25	33.32	39.14	19.39	6.96
25M/25M	38.96	47.04	53.04	33.24	6.90
37M/37M	55.42	63.50	69.32	49.86	6.82

MATERIALS
SHELL:STEEL MATERIAL
INSULATOR:PBT UL 94V-0
CONTACT MATERIAL:BRASS

ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING:5.0 AMPS
CONTACT RESISTANCE:30 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC MIN
INSULATION RESISTANCE:5000 MEGAOHMS MIN
TEMPERATURE RATING:-55°C~+105°C
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

GDZB222 - XX XX A 001 A X B X

No. Of Pins Per Row
09,15,25,37

Standard Plating
02=Gold Flash
05=Gold Flash/TIN

Color
1=Black

Standard Packing
B=Tray



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. B UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.

GENERAL TOLERANCE

X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GDZB222-CA001AB

PART NO.

GDZB222-XXXXA001AXBX

TITLE.

D-SUB 公/公 双层带线19.05