


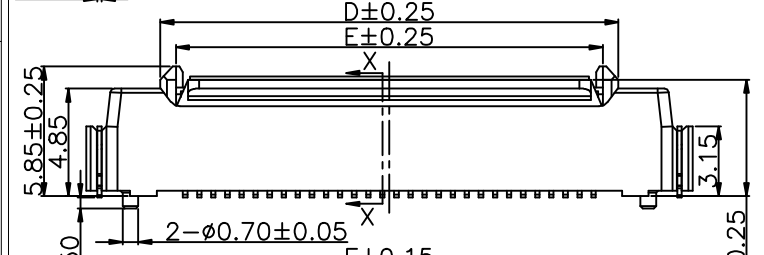



Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩ Min.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:100mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

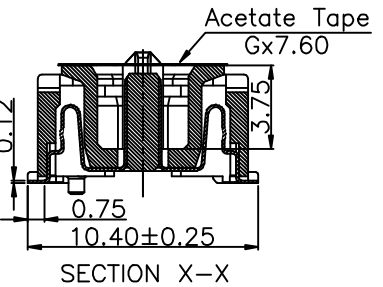

No. of PIN/ROW	Dimension Information						
	A	B	C	D	E	F	G
2x20	21.00	19.80	12.065	14.30	12.90	17.00	11.65
2x30	27.35	26.15	18.415	20.65	19.25	23.35	18.00
2x40	33.70	32.50	24.765	27.00	25.60	29.70	24.35

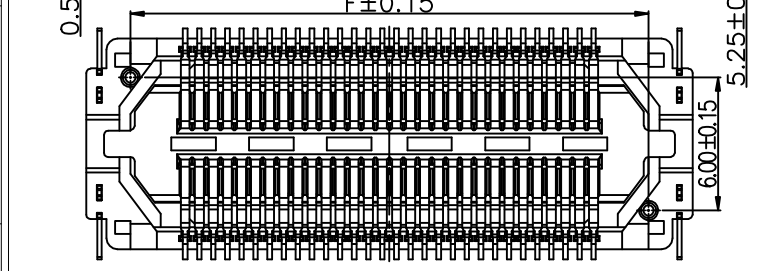

Recommended P.C.Board Layout
 (Tolerance:±0.05)

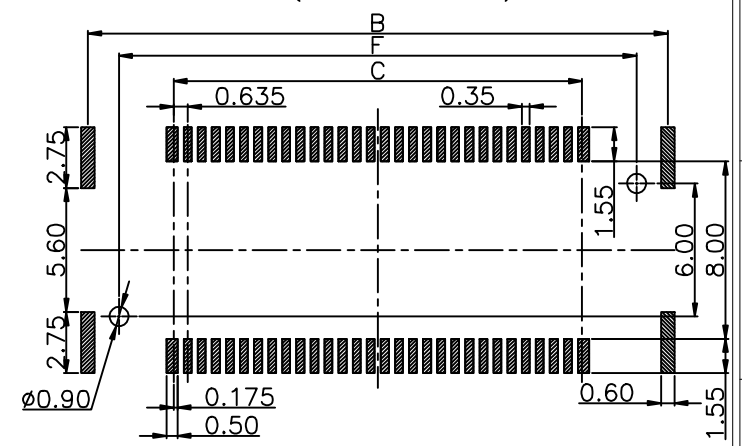

Ordering Information

G GZC201 - XX XX B 001 C 1 S X

No. Of Pins Per Row: 20,30,40
 Standard Plating: 02=Gold Flash, 09=3u" Au/Gold Flash
 Color: 1=Black
 Standard Packing: H=Acetate tape+Tape&Reel

 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GGZC201-CB1CS	TITLE. 0.635mm PITCH BTB FLOATING CONNECTOR		
	 SCALE: 3:1	X.±5.0'	X.±0.30					CHECKED:	DATE:
	PAGE: 1/1	.X'±3.0'	.X±0.25					APPROVED:	DATE:
REV. 03	UNIT. mm	.XX'±2.0'		PART NO. GGZC201-XXXXB001C1SX					
		.XXX'±1.0'							