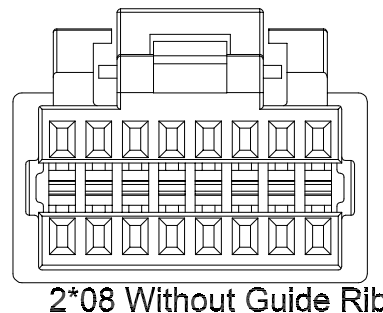
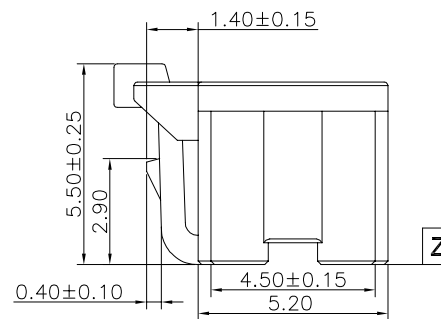
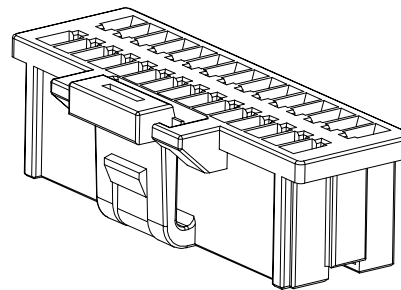
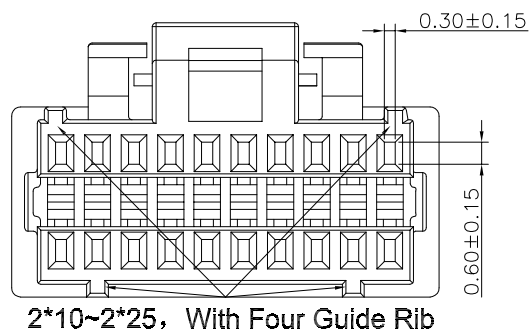
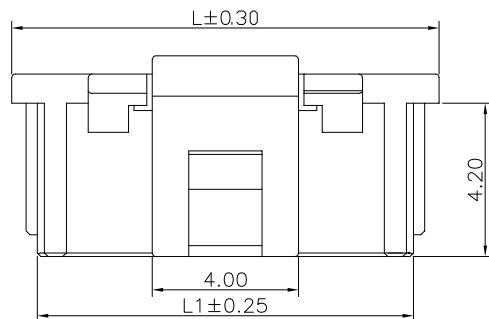
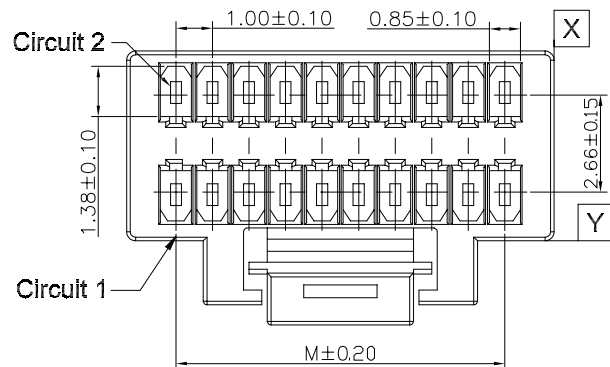


F
E
D
C
B
A

Specifications

Current Rating: 0.8A AC

Current Voltage: 50V AC

Insulation Resistance: $\geq 100M\Omega$

Withstanding Voltage: 250VAC

Contact Resistance: $\leq 20m\Omega$

Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$

Materials

Insulator Material: Nylon-66, UL 94V-0

Mating Terminal: GRC120-T1

All materials must meet Greenconn hazardous substances control standards.

No. of Pins/Row	Dimensions Information		
	M	L	L1
10	9.00	11.70	10.30
15	14.00	16.70	15.30
20	19.00	21.70	20.30
25	24.00	26.70	25.30

Ordering Information

GHC242 - XX A XX

No. of Pins Per Row
SEE TABLE


Materials /Color
M=Nylon66/White



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.* $\pm 5^{\circ}$	X. ± 0.50
.X.* $\pm 2^{\circ}$	.X. ± 0.30
.XX.* $\pm 1^{\circ}$	.XX. ± 0.20
.XXX.* $\pm /$	.XXX. $\pm /$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHC242-HA

PART NO.

GHC242-XXAXX

TITLE.

1.00mm PITCH Housing

AQ

1

2

3

4

5

6

7

8

9