



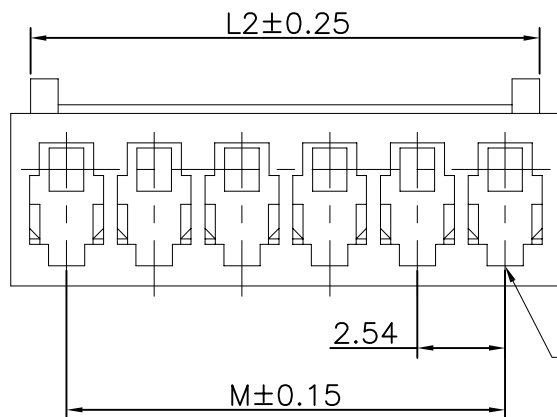


Specifications

Current Rating: 3.0A AC
 Current Voltage: 250V AC
 Dielectric Withstanding Voltage: 1000VAC
 Insulation Resistance: $\geq 1000M\Omega$
 Contact Resistance: $\leq 20m\Omega$
 Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$

Materials

Insulation Material: Nylon-66, UL94V-2
 Mating Terminal: GRH154-T1
 All materials must meet Greenconn hazardous substances control standards.

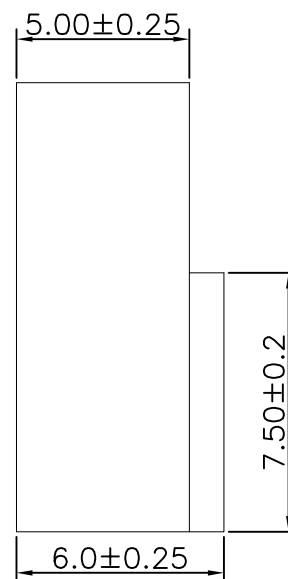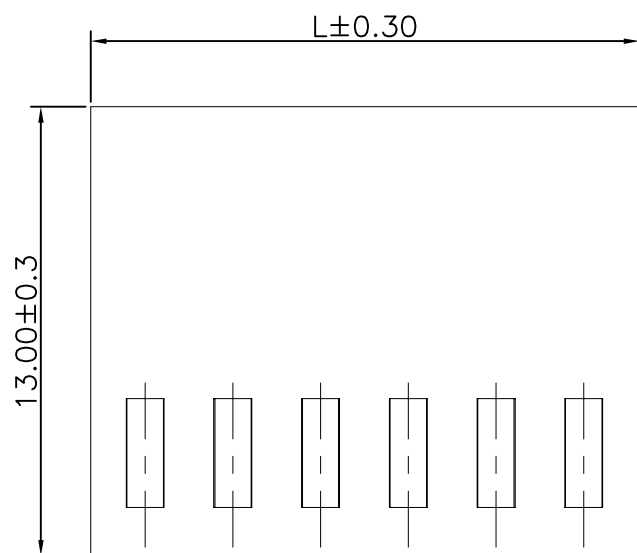

No. of Pins/Row	Dimensions Information		
	M	L2	L
02	2.54	4.58	5.74
03	5.08	7.12	8.28
04	7.62	9.66	10.28
05	10.16	12.20	13.36
06	12.70	14.74	15.90
07	15.24	17.28	18.44
08	17.78	19.82	20.98
09	30.32	22.36	23.52
10	22.86	24.90	26.06
11	25.40	27.44	28.60
12	27.94	29.98	31.14
13	30.48	32.52	33.68
14	33.02	35.06	36.22
15	35.56	37.60	38.76

Ordering Information

GHH291 - XX A XX


No. of Pins Per Row 02~15
 Materials /Color V=Nylon-66/Beige



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/°	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHH291-HA

PART NO.

GHH291-XXAXX

TITLE.

2.54mm PITCH Housing