

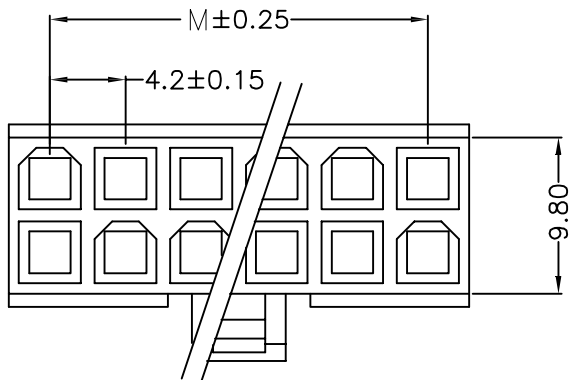


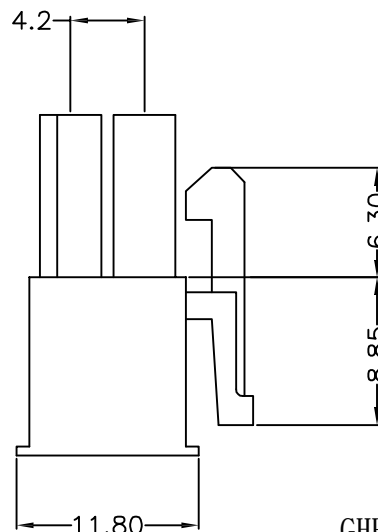

NOTES:

CURRENT RATING:9A AC/DC.
VOLTAGE RATING:600V AC/DC
TEMPERATURE RANGE:−40°C~+105°C.
CONTACT RESISTANCE:10MΩ Max.
INSULATION RESISTANCE:1000MΩ Min.
WITHSTANDING VOLTAGE: 1500V AC/MINUTE.
MATERIAL: Nylon66 UL94V-2.

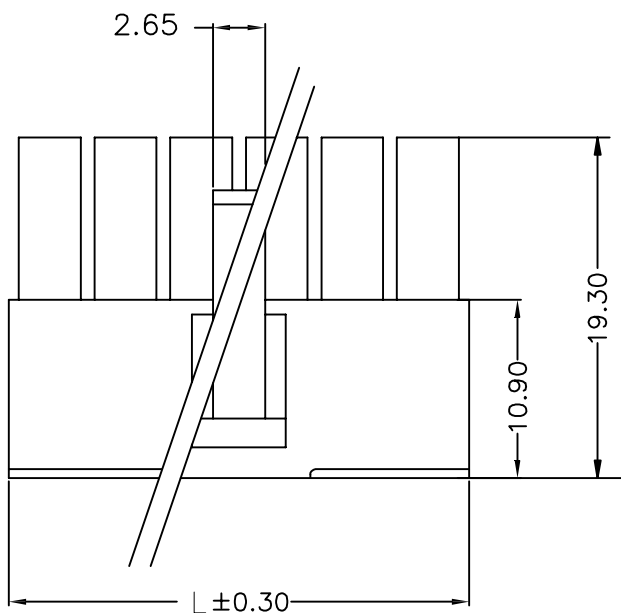


No of Pin/Row	Dimensions	
	M	L
01		5.50
02	4.20	9.70
03	8.40	13.90
04	12.60	18.10
05	16.80	22.30
06	21.00	26.50
07	25.20	30.70
08	29.40	34.90
09	33.60	39.10
10	37.80	43.30
11	42.00	47.50
12	46.20	51.70

GHR232 - XX A XX
No. of Pin/Row 01 ~ 12
Material/Color NF=Nylon66/Transparent



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.30
.XX停 /	.XX?.25
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHR232-HA

PART NO.

GHR232-XXAXX

TITLE.

4.2mm pitch housing