
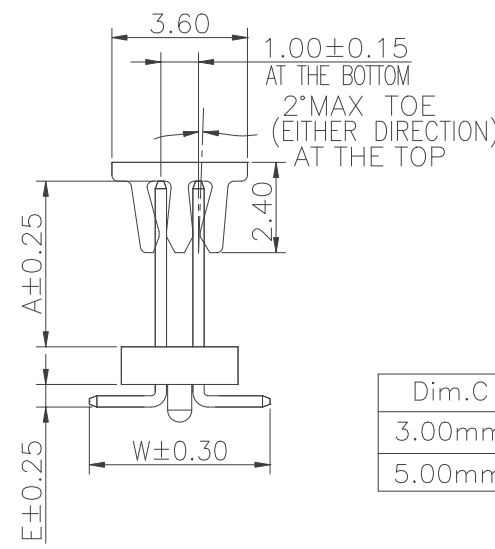
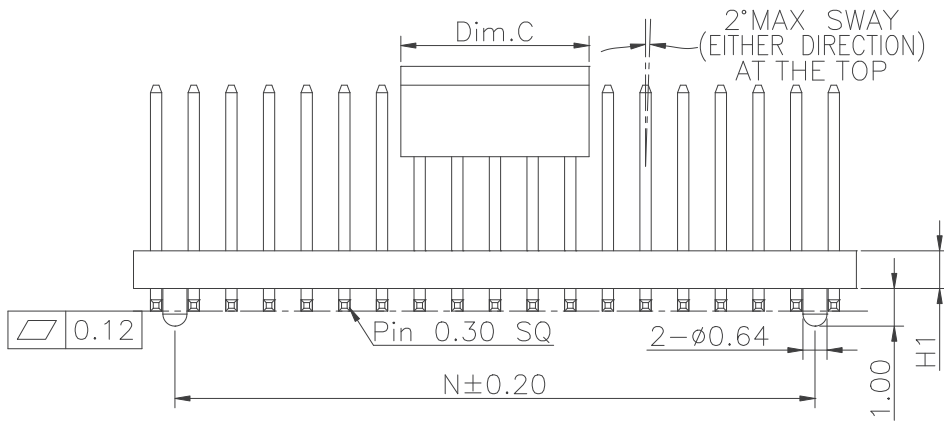
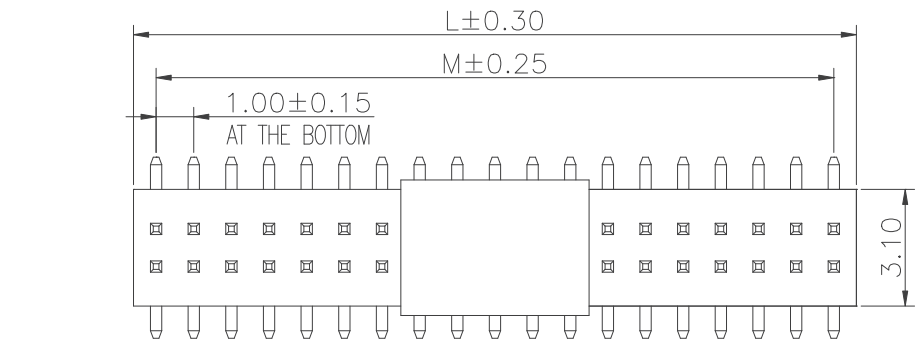


Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet Greenconn hazardous substances control standards.

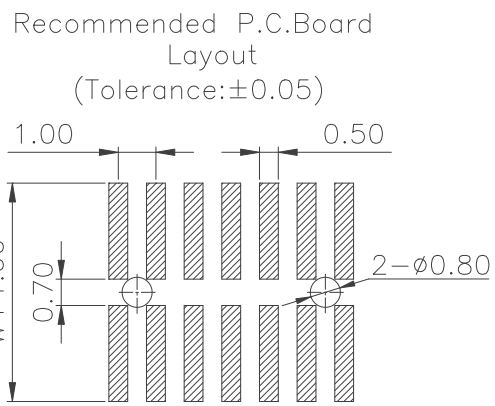

Dim.C	NOTE
3.00mm	03~04Pins
5.00mm	05~40Pins

No. of PIN /ROW	Dimension Information			
	GPCC209	GPCC210/211	M	N
02	2.00	2.20	1.00	
03	3.00	3.20	2.00	1.00
04	4.00	4.20	3.00	2.00
05	5.00	5.20	4.00	3.00
06	6.00	6.20	5.00	4.00
07	7.00	7.20	6.00	5.00
08	8.00	8.20	7.00	6.00
09	9.00	9.20	8.00	7.00
10	10.00	10.20	9.00	8.00
11	11.00	11.20	10.00	9.00
12	12.00	12.20	11.00	10.00
13	13.00	13.20	12.00	11.00
14	14.00	14.20	13.00	12.00
15	15.00	15.20	14.00	13.00
16	16.00	16.20	15.00	14.00
17	17.00	17.20	16.00	15.00
18	18.00	18.20	17.00	16.00
19	19.00	19.20	18.00	17.00
20	20.00	20.20	19.00	18.00
21	21.00	21.20	20.00	19.00
22	22.00	22.20	21.00	20.00
23	23.00	23.20	22.00	21.00
24	24.00	24.20	23.00	22.00
25	25.00	25.20	24.00	23.00
26	26.00	26.20	25.00	24.00
27	27.00	27.20	26.00	25.00
28	28.00	28.20	27.00	26.00
29	29.00	29.20	28.00	27.00
30	30.00	30.20	29.00	28.00
31	31.00	31.20	30.00	29.00
32	32.00	32.20	31.00	30.00
33	33.00	33.20	32.00	31.00
34	34.00	34.20	33.00	32.00
35	35.00	35.20	34.00	33.00
36	36.00	36.20	35.00	34.00
37	37.00	37.20	36.00	35.00
38	38.00	38.20	37.00	36.00
39	39.00	39.20	38.00	37.00
40	40.00	40.20	39.00	38.00

Ordering Information

G PCC2XX - XX XX B XXX C 1 S X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code
09:H1=1.00
10:H1=1.50
11:H1=1.20

No. of Pins per Row
02~40

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DWG. NO.	GPCC2XX-CBXX
PART NO.	GPCC2XX-XXXX BXXXX1SX

TITLE.
1.00 PIN HEADER
DUAL ROWS SMT TYPE
CONNECTOR

REV.	UNIT.	SCALE.	PAGE.	
01	mm	5:1	1/1	