

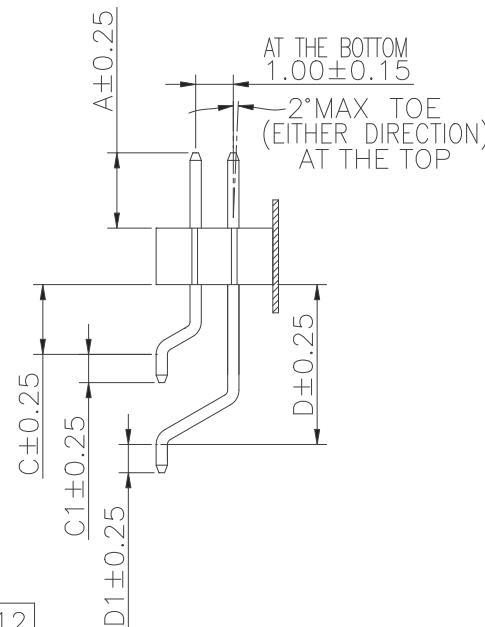
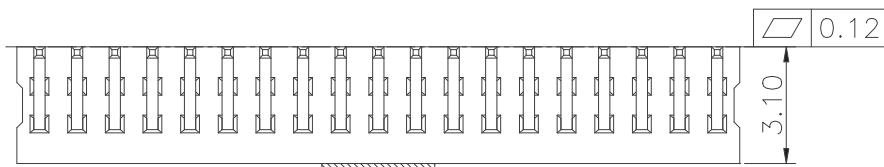


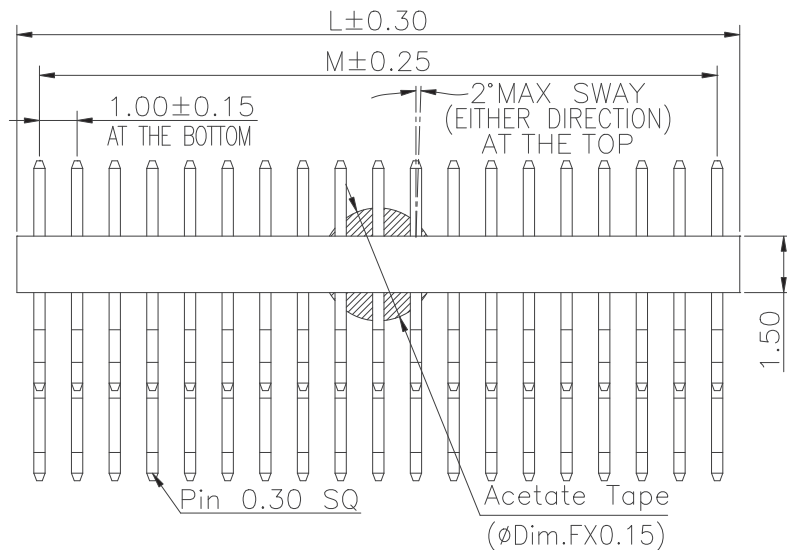

Dim.F	NOTE
3.00mm	03pins
4.00mm	04~15pins

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)



Ordering Information

G PCD201 - XX XX A XXX C 1 T X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code
No. of Pins per Row
02~15

Positioning column information
A=No locating post
B=Round post
C=Square post

Pin length
See the drawing

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

No. of PIN/ROW	Dimension Information	
	L	M
02	2.20	1.00
03	3.20	2.00
04	4.20	3.00
05	5.20	4.00
06	6.20	5.00
07	7.20	6.00
08	8.20	7.00
09	9.20	8.00
10	10.20	9.00
11	11.20	10.00
12	12.20	11.00
13	13.20	12.00
14	14.20	13.00
15	15.20	14.00

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

REV.	UNIT.	SCALE.	PAGE.	
01	mm	5:1	1/1	

X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX±0.15
.XXX.*±1.0°	.XXX±0.10

DWG. NO.

GPCD201-CAXX

PART NO.

GPCD201-XXXX AXXXC1TX

TITLE.

1.00 PIN HEADER
DUAL ROWS SMT TYPE
CONNECTOR