


Specifications
 Current Rating:AWG26:1.0Amp
 AWG28:1.0Amp
 AWG30:1.0Amp
 Voltage Rating: 50V AC/DC.
 Insulation Resistance:100MΩ Min.
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:30mΩ Max.
 Operating Temperature:-25°C to +85°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 or the
 equivalent material
 All materials must meet GREENCONN
 hazardous substances control standards.

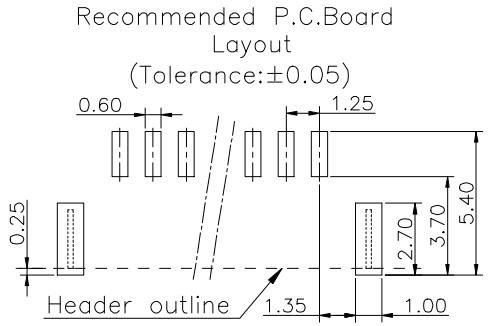

No. of circuits	Dimensions (mm)								
	A	B	C	D	E	F	G	H	I
2	5.75	3.85	2.80	N/A	N/A	1.25	1.00	2.20	4.95
3	7.00	5.10	4.05	N/A	N/A	2.50	1.50	3.40	6.20
4	8.25	6.35	5.30	N/A	N/A	3.75	2.50	4.45	7.45
5	9.50	7.60	6.55	N/A	N/A	5.00	2.50	4.45	8.70
6	10.75	8.85	7.80	N/A	N/A	6.25	4.50	6.60	9.95
7	12.00	10.10	9.05	N/A	N/A	7.50	4.50	6.60	11.20
8	13.25	11.35	10.30	8.15	7.25	8.75	4.50	6.60	12.45
9	14.50	12.60	11.55	9.40	8.50	10.00	4.50	6.60	13.70
10	15.75	13.85	12.80	10.65	9.75	11.25	6.10	8.60	14.95
11	17.00	15.10	14.05	11.90	11.00	12.50	6.10	8.60	16.20
12	18.25	16.35	15.30	13.15	12.25	13.75	6.10	8.60	17.45
13	19.50	17.60	16.55	14.40	13.50	15.00	6.10	8.60	18.70
14	20.75	18.85	17.80	13.15	12.25	16.25	6.10	8.60	19.95
15	22.00	20.10	19.05	14.40	13.50	17.50	6.60	8.70	21.20

Ordering Information

G PDC101 - XX XX A 001 J X A X

No. of Pins per Row: 02,03,04,05,06,07,08,09, 10,11,12,13,14,15
 Standard Plating: 01=Ni 50~100u" Tin 80~160u"
 Color: U=natural(ivory)
 Standard Packing: D=Reel, F=Reel+CAP, H=Reel+Acetate tape

 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GPDC101-CA001	TITLE. 1.25mm PITCH DISCONNECTABLE CRIMP STYLE CONNECTORS
	 REV. C UNIT. mm SCALE. 4:1	PAGE. 1/2	X.±5.0'				
		.X'±3.0'	.X±0.25	APPROVED:	DATE:		
		.XX'±2.0'	.XX±0.15				
		.XXX'±1.0'	.XXX±0.10				

	1	2	3	4	5	6	7	8	9	
F										
E	2 pin		3 pin		4 pin		5 pin		6 pin	
D										
C	9 pin		10 pin		11 pin		12 pin		14 pin	
B										
A	 Website: www.greenconn.com E-mail: sales@greenconn.com		3RD.ANG PROJ.	GENERAL TOLERANCE X: ±5.0' X: ±0.30 .X' ±3.0' .X ±0.25 .XX' ±2.0' .XX ±0.15 .XXX' ±1.0' .XXX ±0.10		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. GPDC101-CA001 PART NO. GPDC101-XXXXA001JUAX	TITLE. 1.25mm PITCH DISCONNECTABLE CRIMP STYLE CONNECTORS	
	1	2	3	4	5	6	7	8	9	