


Dim.D	NOTE
5.00mm	04~08pins
8.16mm	09~25pins

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:
Brass(Pin length less than 25mm)
Phosphor Bronze(The total length of pin is more than 25mm)
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn hazardous substances control standards.

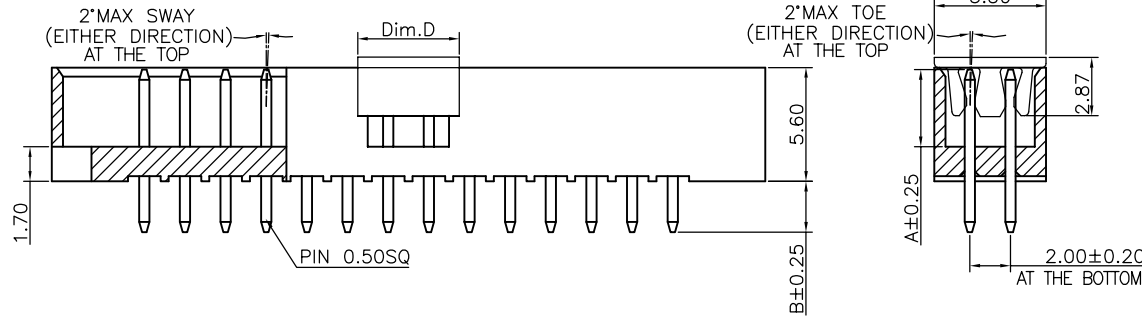


No.of PIN/ROW	Dimension Information		
	M	L1	L
04	6.00	14.00	15.10
05	8.00	16.00	17.10
06	10.00	18.00	19.10
07	12.00	20.00	21.10
08	14.00	22.00	23.10
09	16.00	24.00	25.10
10	18.00	26.00	27.10
11	20.00	28.00	29.10
12	22.00	30.00	31.10
13	24.00	32.00	33.10
14	26.00	34.00	35.10
15	28.00	36.00	37.10
16	30.00	38.00	39.10
17	32.00	40.00	41.10
18	34.00	42.00	43.10
19	36.00	44.00	45.10
20	38.00	46.00	47.10
21	40.00	48.00	49.10
22	42.00	50.00	51.10
23	44.00	52.00	53.10
24	46.00	54.00	55.10
25	48.00	56.00	57.10

Ordering Information

G PFA220		-	XX	XX	A	XXX	C	1	A	X
Plastic specifications 1=Single row 2=Dual row 3=Tripe row 4=Quadruple		Water code	Positioning column information A=No locating post B=Round post C=Square post			Pin length See the drawing	Insulator Material A=PBT R=Nylon(Halogen Free) C=LCP	Color 1=Black 2=White 3=Yellow E=Beige	Contact Material A/S/K/T=Phosphor Bronze B/Z/H/W=Brass	Packing code A=Box B=Tray C=Tube D=Tape&Reel E=Cap+Tube F=Cap+Tape&Reel
No. of Pins per Row 04~25		Plating code 01=Tin 02=Gold Flash 05=Gold Flash/Tin 22=Matte Tin								

Recommended P.C.Board
Layout
(Tolerance:±0.05)



格稜股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.	
01	mm	4:1	1/1	

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	GPFA220-CAXX
PART NO.	GPFA220-XXXX AXXX X1XX

TITLE.
2.00 BOX HEADER
DUAL ROW DIP TYPE
BASE 5.60H