


Dim.C	NOTE
4.00mm	02PIN
5.00mm	03~08PIN
8.16mm	09~40PIN

Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:
 Brass(Pin length less than 25mm)
 Phosphor Bronze(The total length of pin is more than 25mm)
 Insulator Material:
 PBT(Not resistant to high temperature),
 Nylon(High temperature resistance),
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet Greennconn hazardous substances control standards.

No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00

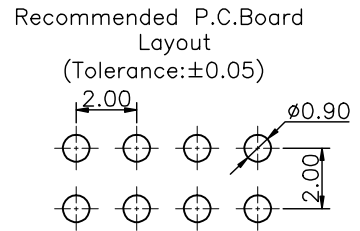

Ordering Information

G PFA224 - XX XX A XXX X

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

No. of Pins per Row
 02~30

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Pin length
 See the drawing

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Insulator Material
 A=PBT
 R=Nylon(Halogen Free)
 Y=NYLON-10T
 C=LCP

Color
 1=Black

Contact Material
 A=Phosphor Bronze
 B=Brass

Packing code
 A=Box
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel

格稜股份有限公司
Greennconn Corporation

GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE. 2.00 MALE HEADER DUAL ROWS DIP TYPE CONNECTOR
X.±5.0'	X.±0.30	CHECKED:	DATE:	GPFA224-Series	
.X'±3.0'	.X±0.25	CO SIGNED:	DATE:	PART NO. GPFA224-Series	
.XX'±2.0'	.XX±0.15	APPROVED:	DATE:		
.XXX'±1.0'	.XXX±0.10				

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1