
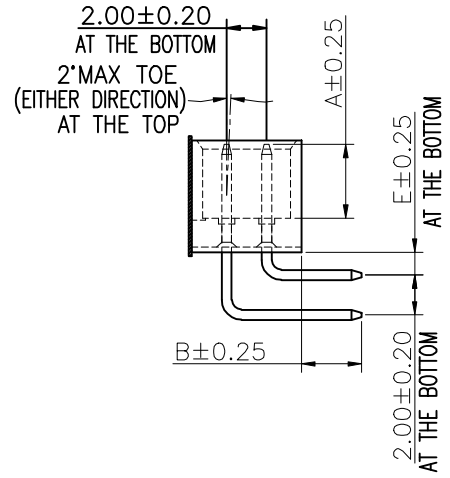
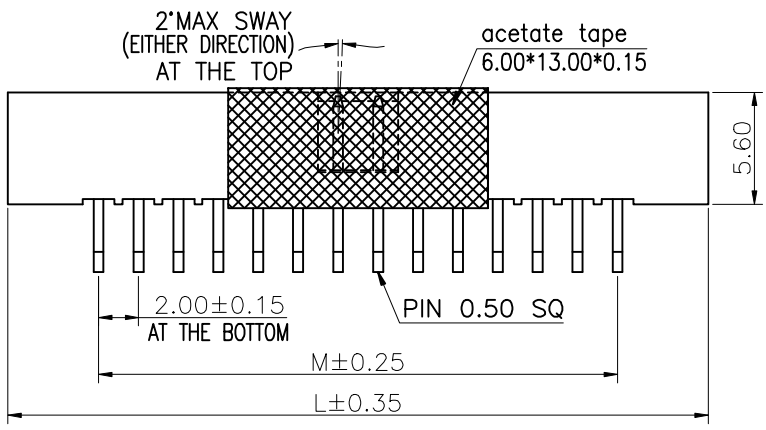


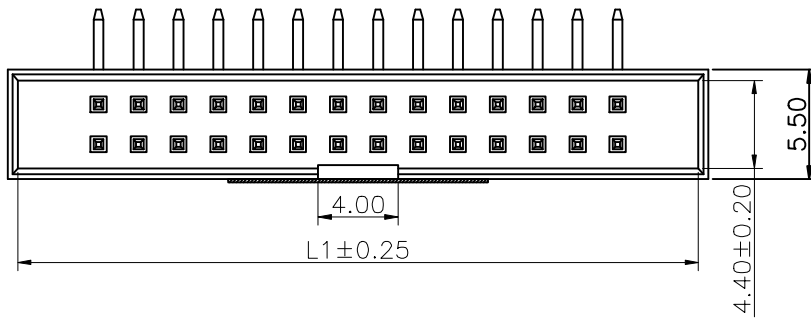

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:
Brass(Pin length less than 25mm)
Phosphor Bronze(The total length of pin is more than 25mm)
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn hazardous substances control standards.

No.of PIN/ROW	Dimension Information		
	M	L1	L
04	6.00	14.00	15.10
05	8.00	16.00	17.10
06	10.00	18.00	19.10
07	12.00	20.00	21.10
08	14.00	22.00	23.10
09	16.00	24.00	25.10
10	18.00	26.00	27.10
11	20.00	28.00	29.10
12	22.00	30.00	31.10
13	24.00	32.00	33.10
14	26.00	34.00	35.10
15	28.00	36.00	37.10
16	30.00	38.00	39.10
17	32.00	40.00	41.10
18	34.00	42.00	43.10
19	36.00	44.00	45.10
20	38.00	46.00	47.10
21	40.00	48.00	49.10
22	42.00	50.00	51.10
23	44.00	52.00	53.10
24	46.00	54.00	55.10
25	48.00	56.00	57.10

Ordering Information

G PFB220 - XX XX A XXX C 1 A X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

No. of Pins per Row
04~25

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing


Insulator Material
A=PBT
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze
B/Z/H/W=Brass

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

Recommended P.C.Board Layout (Tolerance:±0.05)



格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	GPFB220-CAXX
PART NO.	GPFB220-XXXX AXXX X1XX

TITLE.	2.00PIN HEADER DUAL ROWS R/A TYPE BASE 5.60H
--------	--