
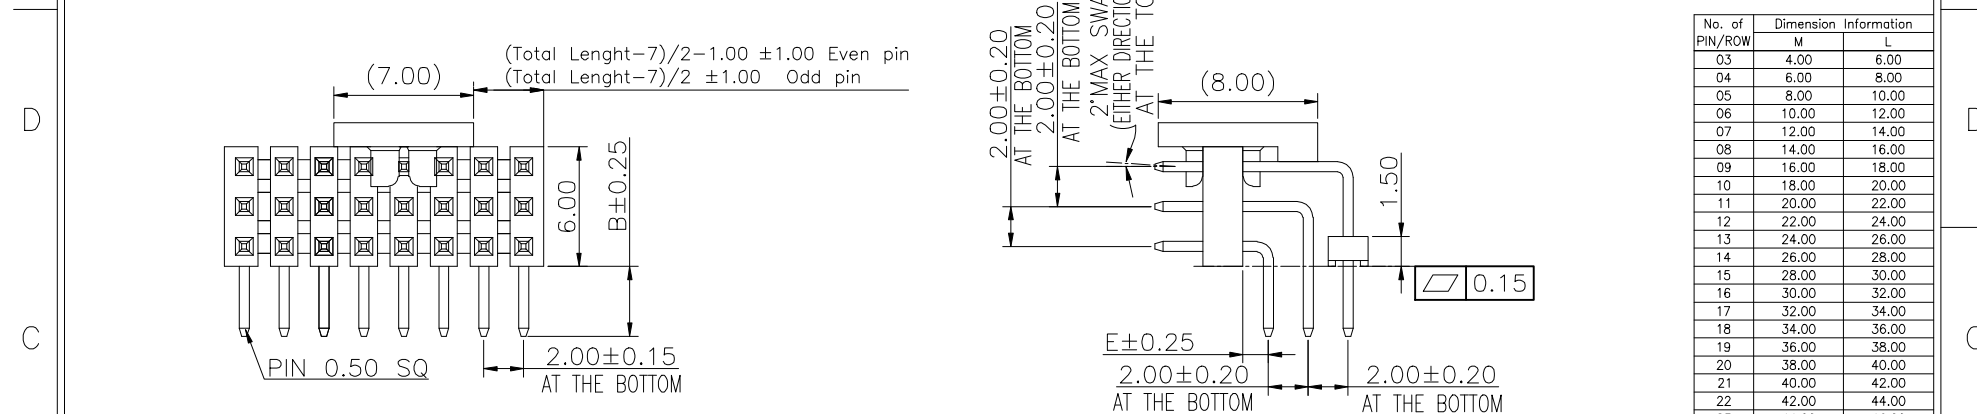


1 2 3 4 5 6 7 8 9

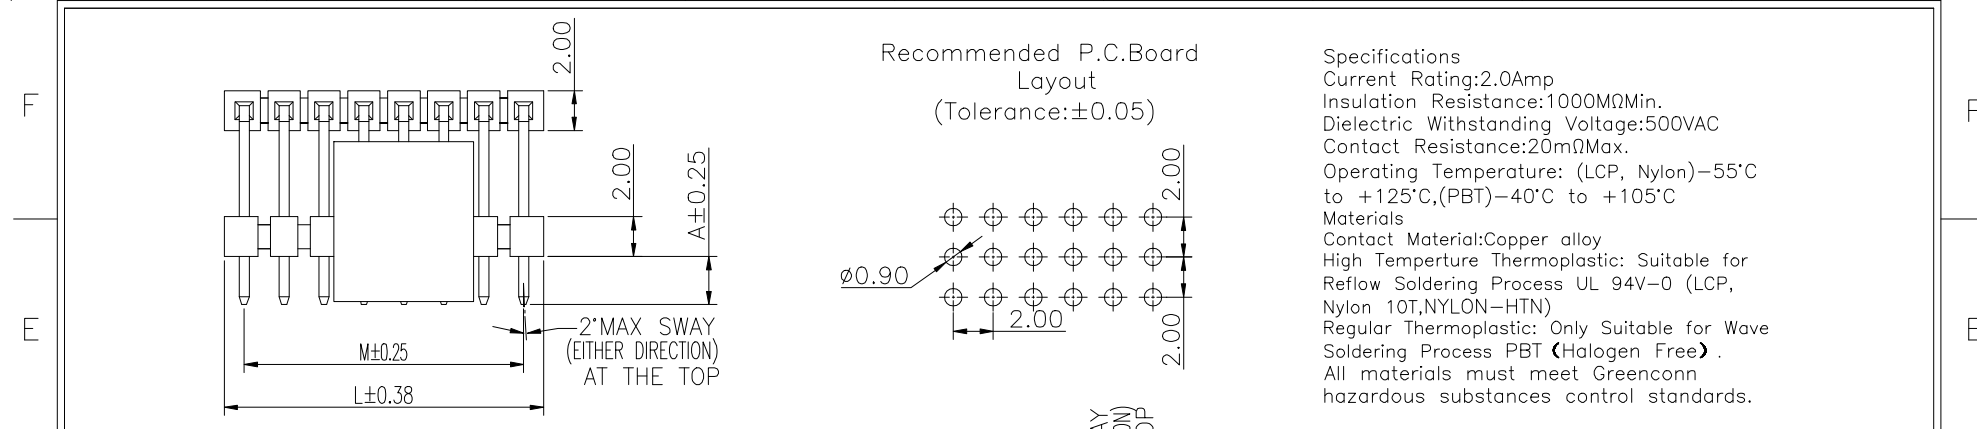

Ordering Information

G PFB303 - XX XX A XXX X 1 X X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

No. of Pins per Row
03~40

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing

Insulator Material
C=LCP
R=Nylon HTN(Halogen Free)
A=PBT

Color
1=Black
2=White
5=Natural
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze
B/Z/H/W=Brass

Packing code
A=Box
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel

<p>Website: www.greenconn.com E-mail: sales@greenconn.com</p>		3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GPFB303-Series	TITLE. 2.00 PIN HEADER THREE ROWS DIP TYPE CONNECTOR
			X. ±5.0'	X. ±0.30				
REV. A	UNIT. mm	SCALE. 3:1	PAGE. 1/1	.X' ±3.0'	.X ±0.25	APPROVED:	DATE:	PART NO. GPFB303-Series
				.XX' ±2.0'	.XX ±0.15			
				.XXX' ±1.0'	.XXX ±0.10			

1 2 3 4 5 6 7 8 9