

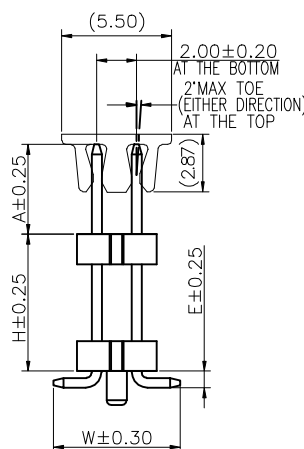



Dim.E	NOTE
4.00mm	02PIN
5.00mm	03~08PIN
8.16mm	09~40PIN

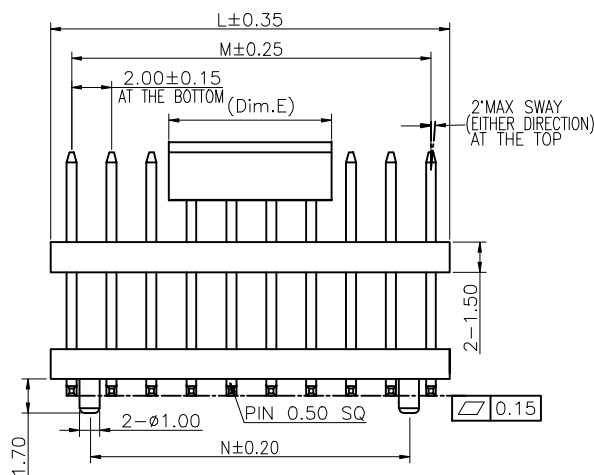

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-55°C to +125°C
Materials
Contact Material:
Brass(Pin length less than 25mm)
Phosphor Bronze(The total length of pin is more than 25mm)
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn hazardous substances control standards.



Recommended P.C.Board
Layout
(Tolerance:±0.05)

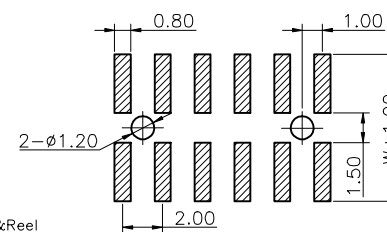

Ordering Information

G	PFC204	-	XX	XX	X	XXX	X	X	X	X
Plastic specifications 1=Single row 2=Dual row 3=Tripe row 4=Quadruple	Water code	No. of Pins per Row 02~40	Positioning column information A=No locating post B=Round post C=Square post	Plating code 01=Tin 02=Gold Flash 05=Gold Flash/Tin 22=Matte Tin	Pin length See the drawing	Insulator Material R=Nylon(Halogen Free) C=LCP Y=NYLON-10T(Halogen Free) A=PBT	Color 1=Black 2=White 3=Yellow E=Beige	Contact Material A/S/K/T=Phosphor Bronze B/Z/H/W=Brass	Packing code C=Tube D=Tape&Reel E=Cap+Tube F=Cap+Tape&Reel	

格稜股份有限公司
Greenconn Corporation

格菱股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.
					X.'±5.0'	X.±0.30	CHECKED:	DATE:	
					.X'±3.0'	.X±0.25	CO SIGNED:	DATE:	PART NO.
					.XX'±2.0'	.XX±0.15	APPROVED:	DATE:	GPFC204—XXXX XXXX XXXX
REV.	UNIT.	SCALE.	PAGE.		.XXX'±1.0'	.XXX±0.10			
01	mm	3:1	1/1						