

All materials must meet GreenComm hazardous substances control standards.

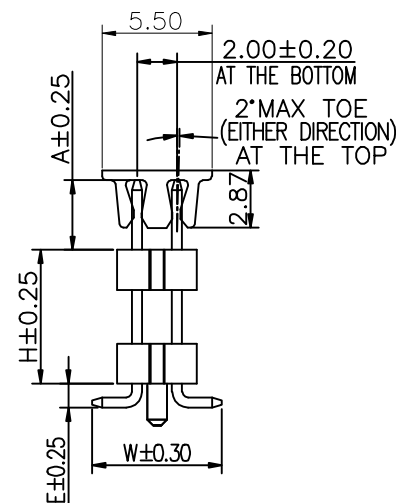


Diagram illustrating the part numbering system for the PFC219 connector, showing the breakdown of the code into various specifications:

- G PFC219**: Plastic specifications
 - 1=Single row
 - 2=Dual row
 - 3=Tripe row
 - 4=Quadruple
- Water code**: No. of Pins per Row (02~40)
- XX**: Plating code
 - 01=Tin
 - 02=Gold Flash
 - 05=Gold Flash/Tin
 - 22=Matte Tin
- XX**: Positioning column information
 - A=No locating post
 - B=Round post
 - C=Square post
- B**: Pin length (See the drawing)
- XXX**: Insulator Material
 - R=Nylon(Halogen Free)
 - C=LCP
- C**: Contact Material
 - A/S/K/T=Phosphor Bronze
 - B/Z/H/W=Brass
- 1**: Color
 - 1=Black
 - 2=White
 - 3=Yellow
 - E=Beige
- A**: Packing code
 - A=Box
 - B=Tray
 - C=Tube
 - D=Tape&Reel
 - E=Cap+Tube
 - F=Cap+Tape&Reel
- X**: Packing code (0.80)

No. of PIN/ROW	Dimension Information		
	M	L	N
02	2.00	4.20	
03	4.00	6.20	2.00
04	6.00	8.20	4.00
05	8.00	10.20	6.00
06	10.00	12.20	8.00
07	12.00	14.20	10.00
08	14.00	16.20	12.00
09	16.00	18.20	14.00
10	18.00	20.20	16.00
11	20.00	22.20	18.00
12	22.00	24.20	20.00
13	24.00	26.20	22.00
14	26.00	28.20	24.00
15	28.00	30.20	26.00
16	30.00	32.20	28.00
17	32.00	34.20	30.00
18	34.00	36.20	32.00
19	36.00	38.20	34.00
20	38.00	40.20	36.00
21	40.00	42.20	38.00
22	42.00	44.20	40.00
23	44.00	46.20	42.00
24	46.00	48.20	44.00
25	48.00	50.20	46.00
26	50.00	52.20	48.00
27	52.00	54.20	50.00
28	54.00	56.20	52.00
29	56.00	58.20	54.00
30	58.00	60.20	56.00
31	60.00	62.20	58.00
32	62.00	64.20	60.00
33	64.00	66.20	62.00
34	66.00	68.20	64.00
35	68.00	70.20	66.00
36	70.00	72.20	68.00
37	72.00	74.20	70.00
38	74.00	76.20	72.00
39	76.00	78.20	74.00
40	78.00	80.20	76.00

格稜股份有限公司
Greenconn Corporation

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GPFC219-CBXX
					X.±5.0"	X.±0.30	CHECKED:	DATE:	
					.X'±3.0"	.X±0.25	CO SIGNED:	DATE:	
					.XX'±2.0"	.XX±0.15	APPROVED:	DATE:	
REV.	UNIT.	SCALE.	PAGE.		.XXX'±1.0"	.XXX±0.10			PART NO. GPFC219-XXXX BXXX X1XX
01	mm	3:1	1/1						

TITLE.		40	78.00	90.20	7
	2.00 PIN HEADER DUAL ROWS SMT TYPE CONNECTOR				