
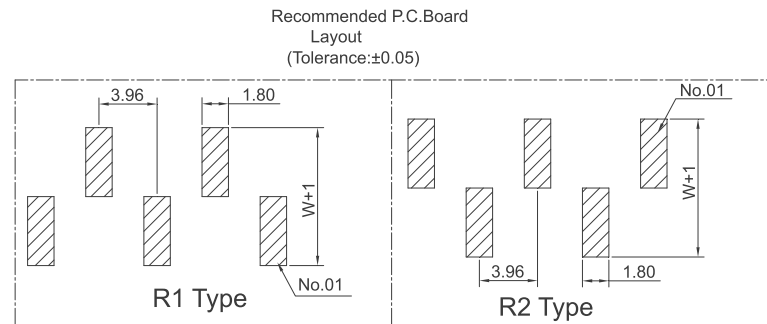


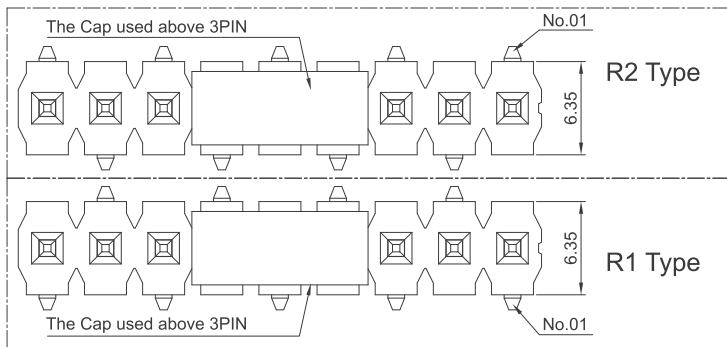

Specifications

Current Rating:7.9Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:1000VAC

Contact Resistance:30mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:

Brass(Pin length less than 25mm)



Phosphor Bronze(The total length of pin is more than 25mm)

Insulator Material:

Nylon(High temperature resistance), LCP(High temperature resistance),

UL 94V-0

All materials must meet Greenconn hazardous substances control standards.

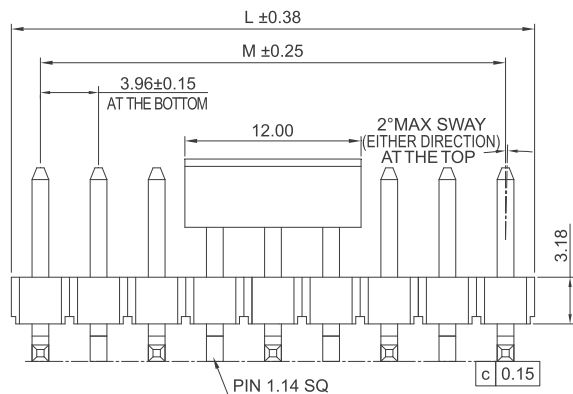

Ordering Information

G PJC 1 01		-	XX	XX	A	XXX	X	1	X	X
Plastic specifications 1=Single row 2=Dual row 3=Tripe row 4=Quadruple		Water code	Positioning column information A=No locating post B=Round post C=Square post			Pin length See the drawing	Insulator Material R=Nylon(Halogen Free) C=LCP	Color 1=Black 2=White 3=Yellow E=Beige	Contact Material A/S/K/T=Phosphor Bronze B/Z/H/W=Brass	Packing code A=Box B=Tray C=Tube D=Tape&Reel E=Cap+Tube F=Cap+Tape&Reel G=Acetate Tape+Tube H=Acetate Tape+Tape&Reel
No. of Pins per Row 02~24		Plating code 01=Tin 02=Gold Flash 05=Gold Flash/Tin 22=Matte Tin								

No. of PIN/ROW	Dimension Information	
	M	L
02	7.92	3.96
03	11.88	7.92
04	15.84	11.88
05	19.80	15.84
06	23.76	19.80
07	27.72	23.76
08	31.68	27.72
09	35.64	31.68
10	39.60	35.64
11	43.56	39.60
12	47.52	43.56
13	51.48	47.52
14	55.44	51.48
15	59.40	55.44
16	63.36	59.40
17	67.32	63.36
18	71.28	67.32
19	75.24	71.28
20	79.20	75.24
21	83.16	79.20
22	87.12	83.16
23	91.08	87.12
24	95.04	91.08

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DWG. NO.

GPJC101-CAXX

PART NO.

GPJC101-XXXX AXXX X1XX

TITLE

3.96 PIN HEADER
SINGLE ROW SMT TYPE
CONNECTOR

REV.	UNIT.	SCALE.	PAGE.	
01	mm	3:1	1/1	