


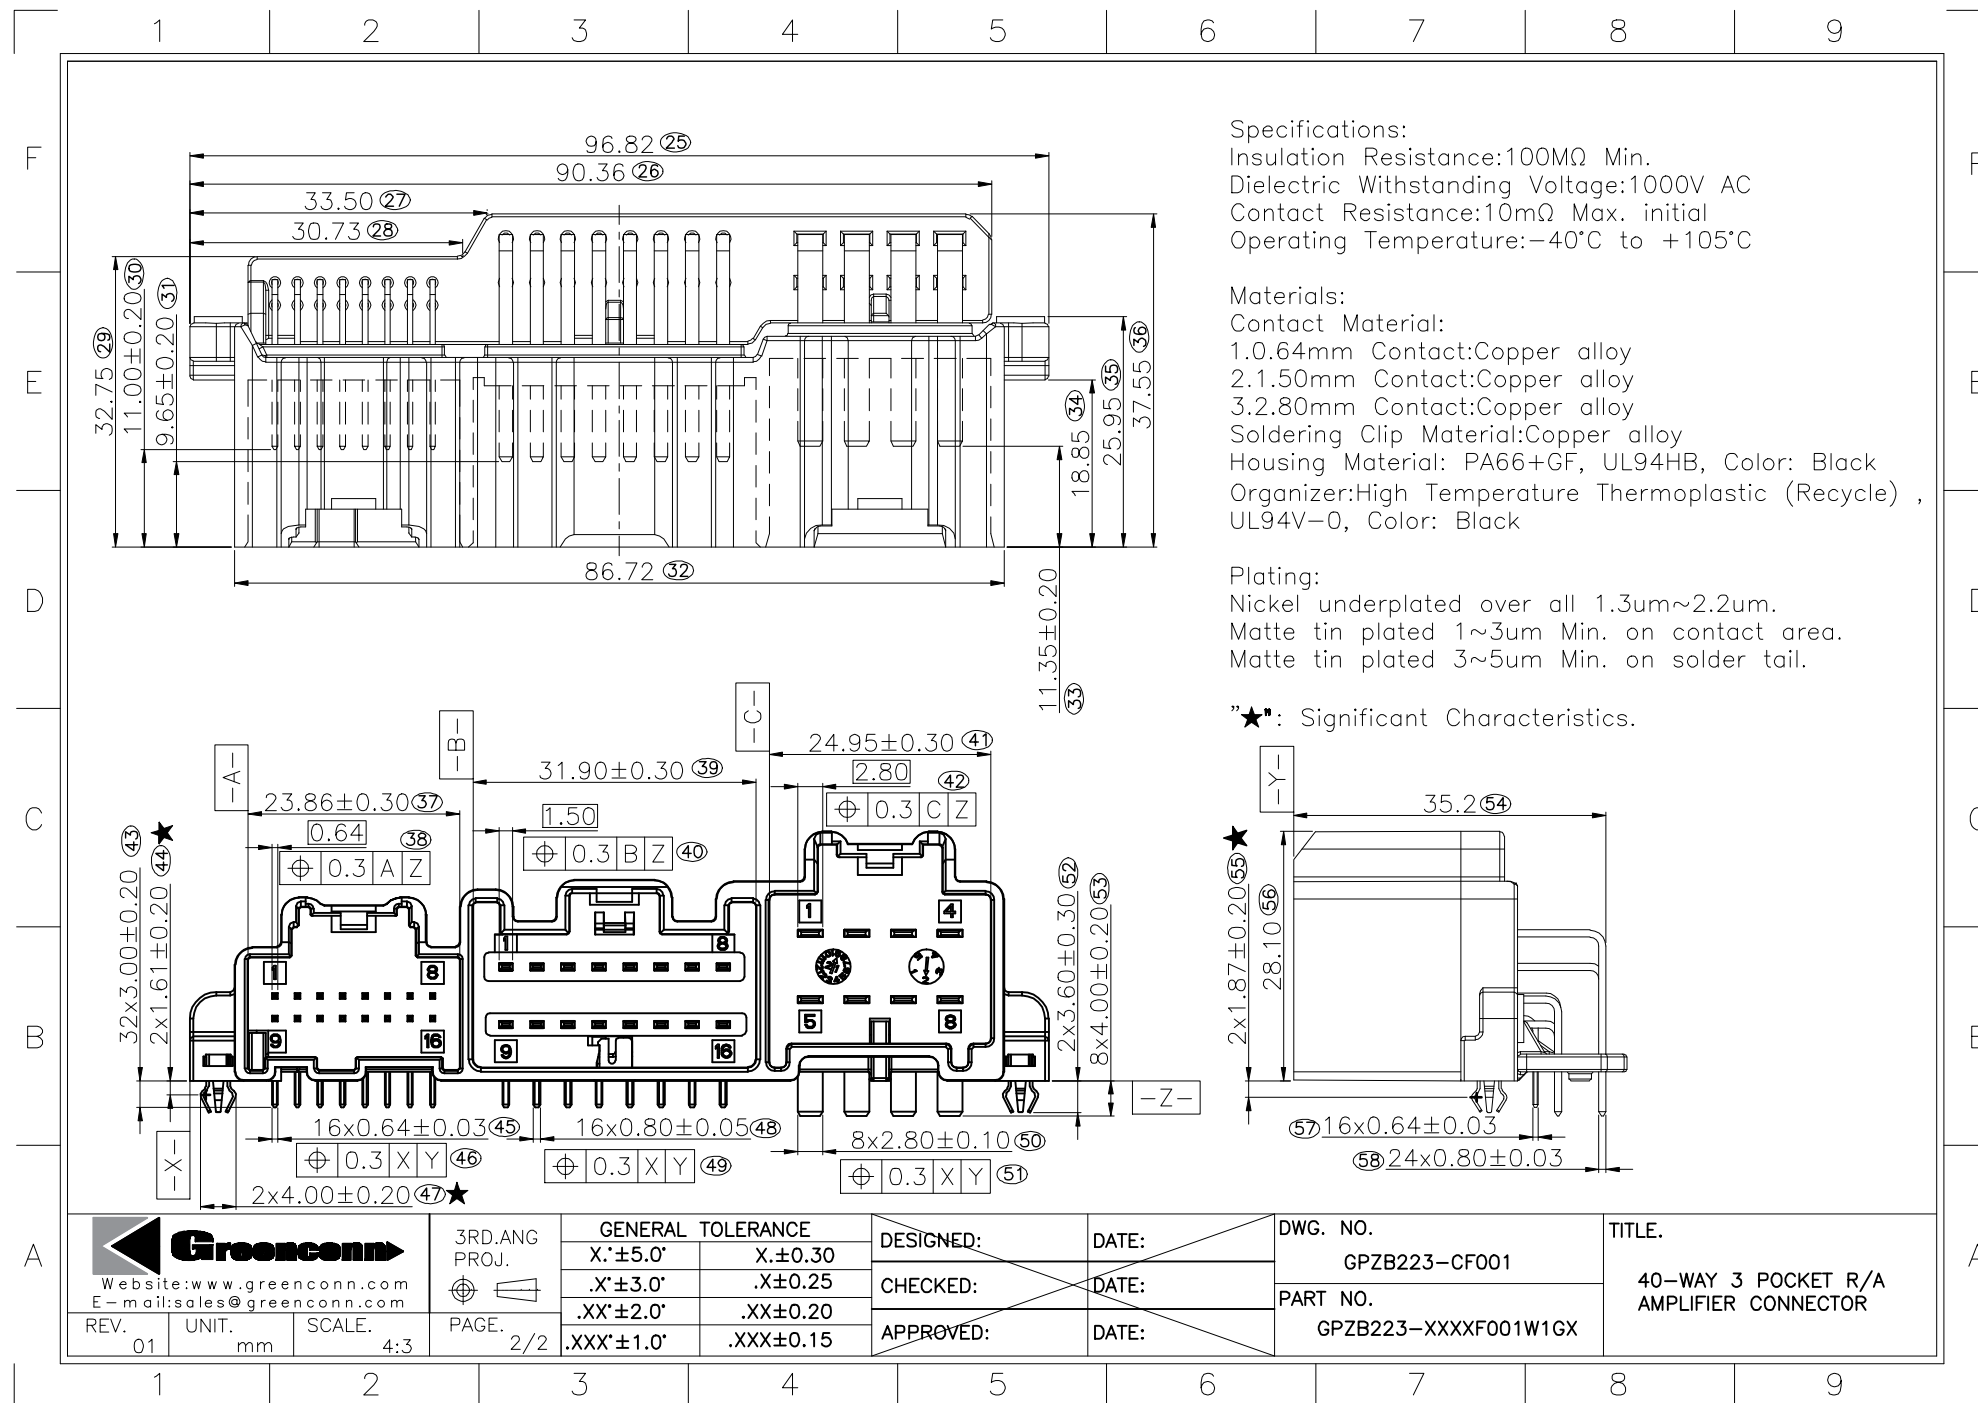

Specifications:

Insulation Resistance:100MΩ Min.

Dielectric Withstanding Voltage:1000V AC

Contact Resistance:10mΩ Max. initial

Operating Temperature:-40°C to +105°C

Materials:

Contact Material:

1.064mm Contact:Copper alloy

2.1.50mm Contact:Copper alloy

3.2.80mm Contact:Copper alloy

Soldering Clip Material:Copper alloy

Housing Material: PA66+GF, UL94HB, Color: Black

Organizer:High Temperature Thermoplastic (Recycle) ,
UL94V-0, Color: Black

Plating:

Nickel underplated over all 1.3um~2.2um.

Matte tin plated 1~3um Min. on contact area.

Matte tin plated 3~5um Min. on solder tail.

”★”: Significant Characteristics.

