

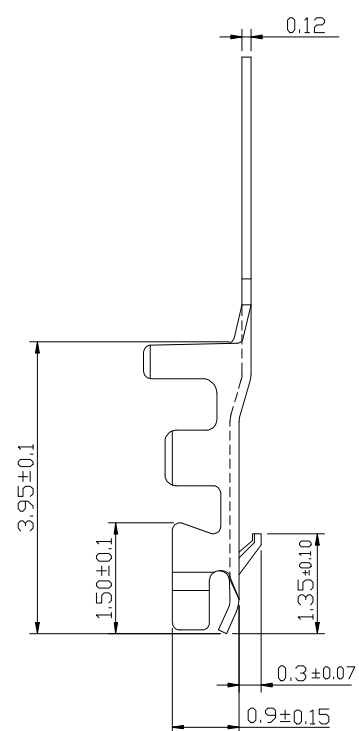


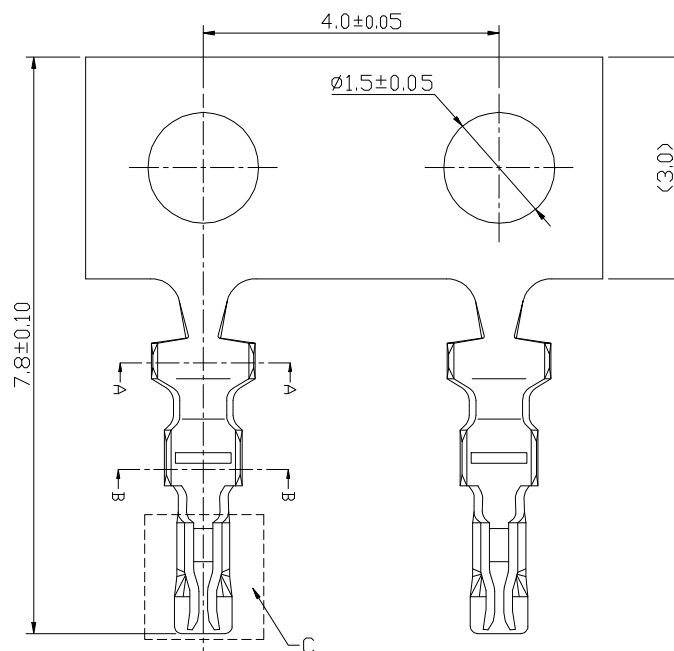


NOTES:

OPERATING TEMPERATURE: -25~85°C
 OPERATING VOLTAGE: 150V AC/DC
 CURRENT RATING: 1.0 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 INSULATION RESISTANCE: 100MΩ Min;
 CONTACT RESISTANCE: 0.03Ω Max;

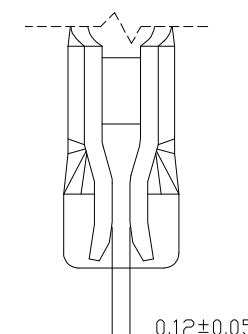

DETAIL: C SCALE 2: 1

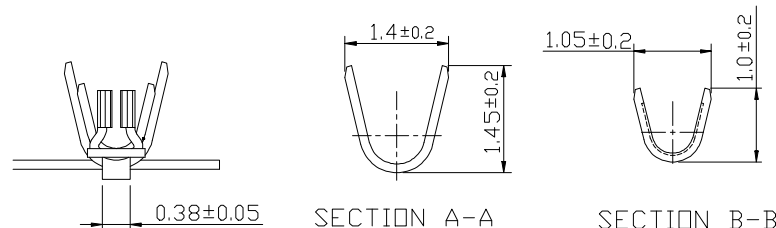

Ordering Information

GRC114 - 01 XX AB

Standard Plating
 01=Tin
 02=Gold flash

Materials
 AB=Phosphor Bronze



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
 3RD. ANG PROJ. 3RD. ANG PROJ. 3RD. ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X. ?
.X 停 /	.X ? .25
.XX 停 /	.XX ? .20
.XXX 停 /	.XXX ? .15

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	GRC114-T1
PART NO.	GRC114-01 XX AB

TITLE.
 1.0 WTB CONN. PLUG CRIMP TERMINAL