

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F





E

D

C

B

A

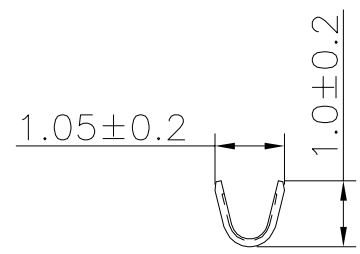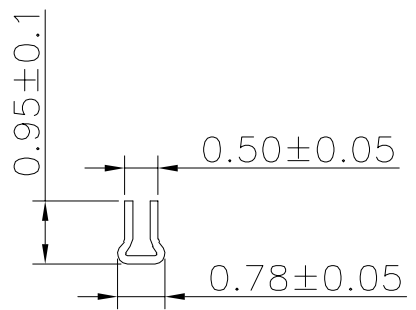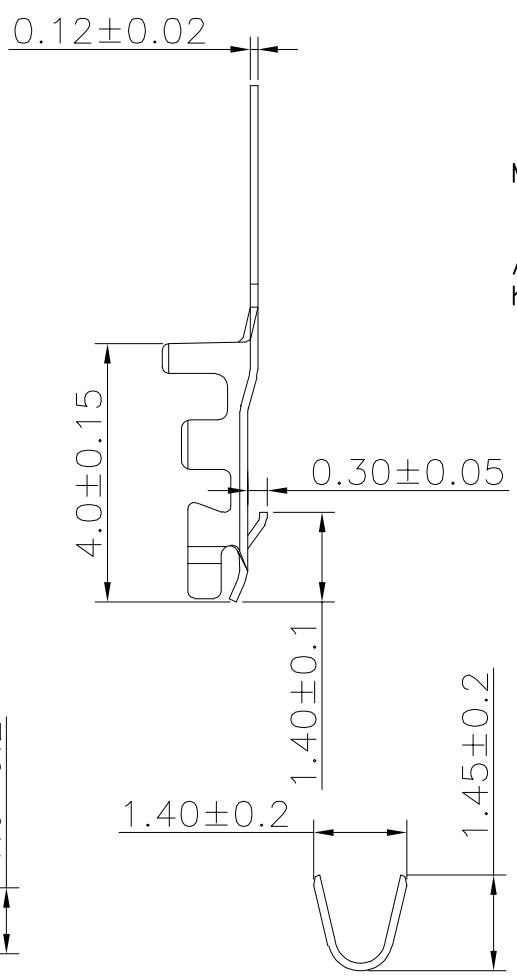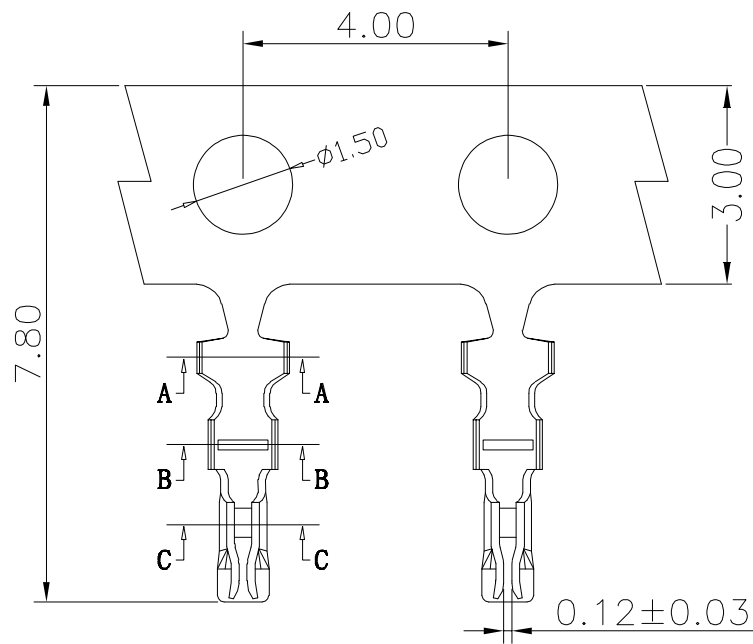

Specifications
Current Rating: 1.0A AC
Current Voltage: 125V AC
Contact Resistance: $\leq 20\text{m}\Omega$
Operating Temperature: -25°C to $+85^{\circ}\text{C}$
Wire Range: AWG#28~#32
Insulation O.D. : 0.4~0.8mm.
Materials
Terminal Material: Phosphor Bronze
Mating Housing: GHC121-HA
All materials must meet Greenconn hazardous substances control standards.

Ordering Information

GRC119 - 01 XX XX
Standard Plating Materials
01=Tin AB=Phosphor bronze
.....



REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GRC119-T1
PART NO.
GRC119-01XXAB

TITLE.
1.00mm PITCH Terminal

1 2 3 4 5 6 7 8 9