

1 2 3 4 5 6 7 8 9

F


E

D

C

B

A



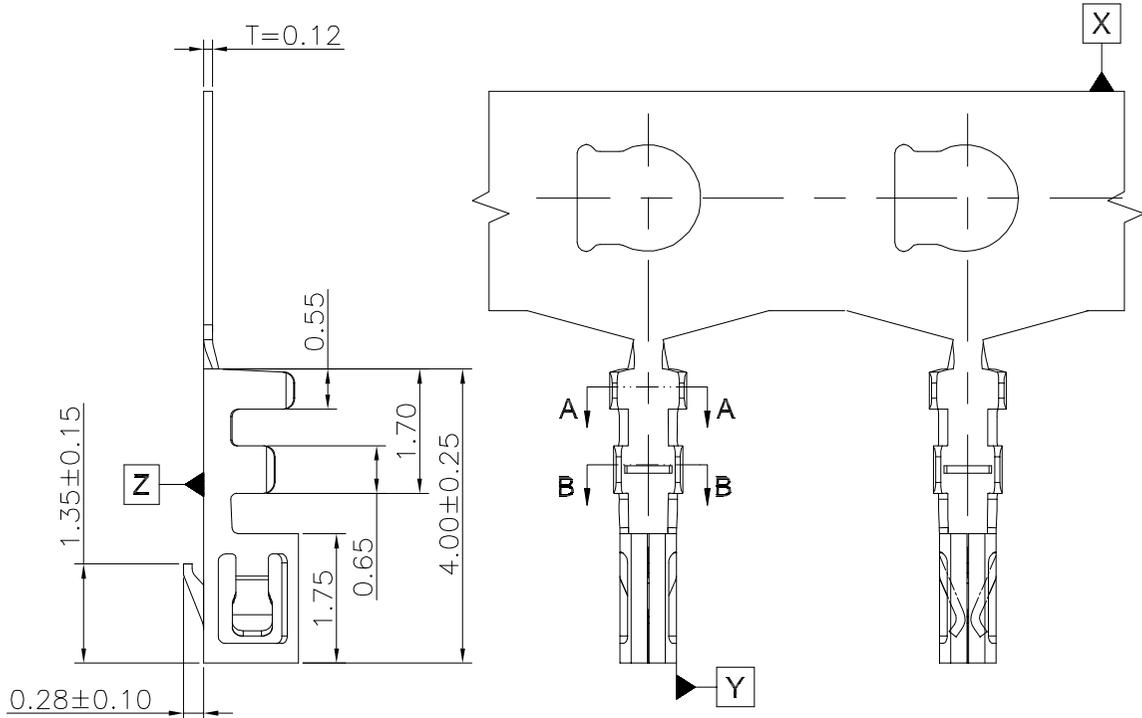


Specifications


- Current Rating: 0.8A AC
- Current Voltage: 50V AC
- Contact Resistance: $\leq 20m\Omega$
- Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$
- Wire Range: AWG28#~32#
- Insulation O.D.: 0.80mm(Max)

Materials

- Terminal Material: Phosphor Bronze
- Mating Housing: GHC242-HA
- All materials must meet Greenconn hazardous substances control standards.

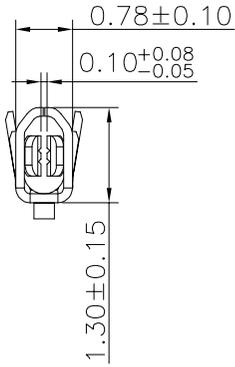

Ordering Information

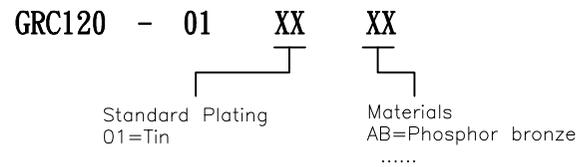

Greenconn
 Website: www.greenconn.com
 E-mail: sales@greenconn.com

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X. $\pm 5^{\circ}$	X. ± 0.50
.X. $\pm 2^{\circ}$.X. ± 0.30
.XX. $\pm 1^{\circ}$.XX. ± 0.20
.XXX. $\pm /$.XXX. $\pm /$

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GRC120-T1
 PART NO.
GRC120-01XXAB

TITLE.
1.00mm PITCH Terminal

AQ 1 2 3 4 5 6 7 8 9