
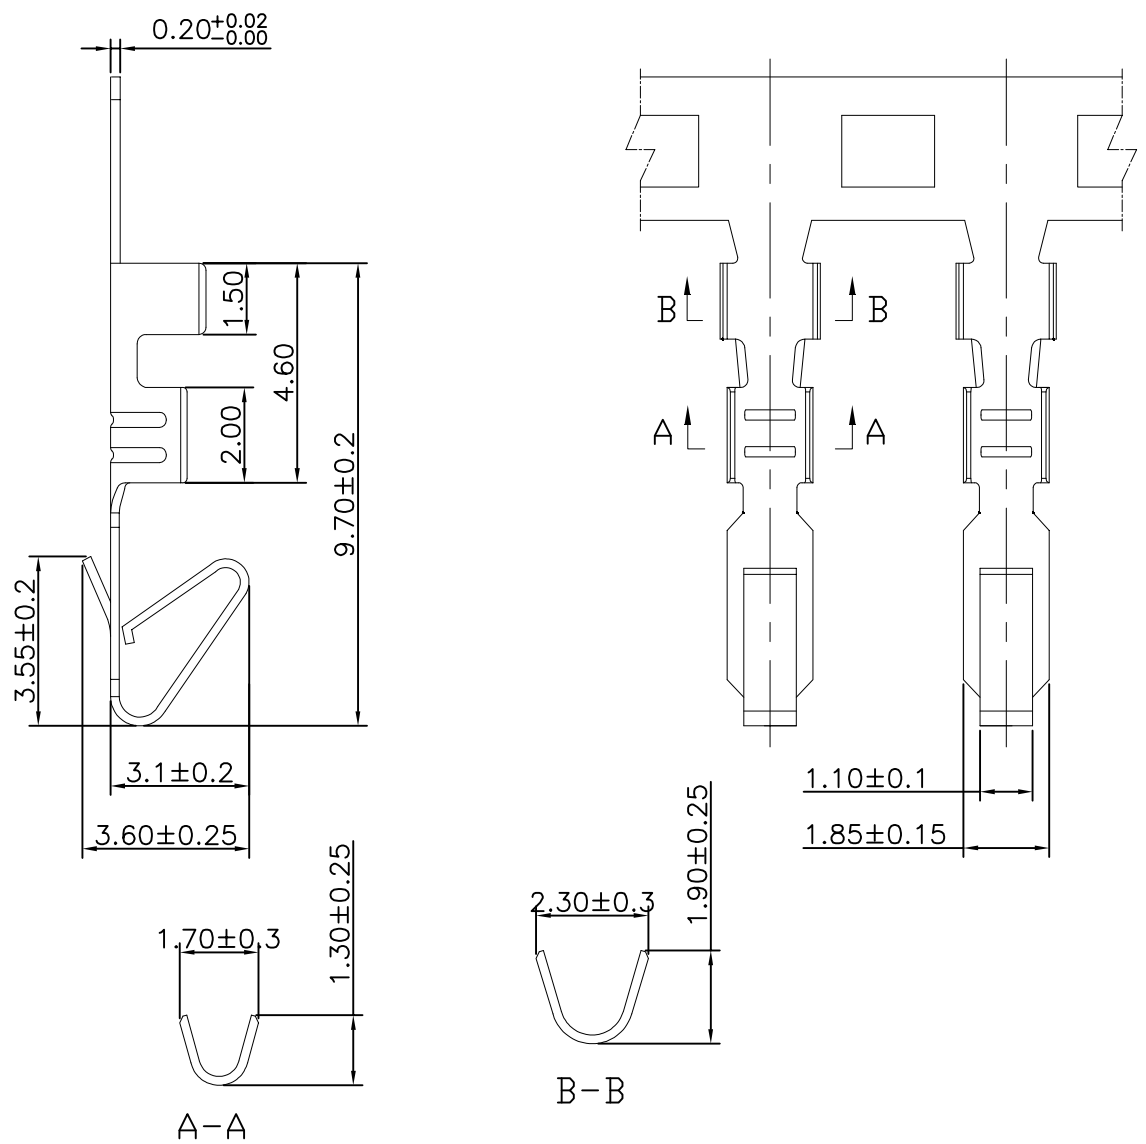




Specifications
Current Rating: 3.0A AC
Current Voltage: 250V AC
Contact Resistance: ≤20mΩ
Operating Temperature: -25°C to +85°C
Wire Rang: AWG#22~#30
Insulation O.D. : 1.6mm(MAX)
Materials
Terminal Material: Phosphor Bronze
Mating Housing: GHH291-HA
All materials must meet Greenconn hazardous substances control standards.

Ordering Information

GRH154 - 01 XX XX
Standard Plating 01=Tin
Materials AB=Phosphor bronze

 Website: www.greenconn.com E-mail: sales@greenconn.com			3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. GRH154-T1	TITLE. 2.54mm PITCH Terminal
REV. A	UNIT. mm	SCALE. 1:1		X.*±5'	X.±0.50				
				.X.*±2'	.X±0.30				
				.XX.*±1'	.XX±0.20				
				.XXX.*±/	.XXX±/			PART NO. GRH154-01XXAB	