





INKJET CODE Description : XX X XX XX

XX-YEAR: 20 = 2020
X-MONTH: A = JAN, B = FEB,.....
XX-DAY: 14 = 14th DAY
XX-HOUR: 14 = 14 PM


Specifications
Current Rating:13.0Amp AC/DC
Voltage Rating: 48V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-55°C to +125°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 PA66
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.
★: Significant Characteristics.



Spray code




VIEW A

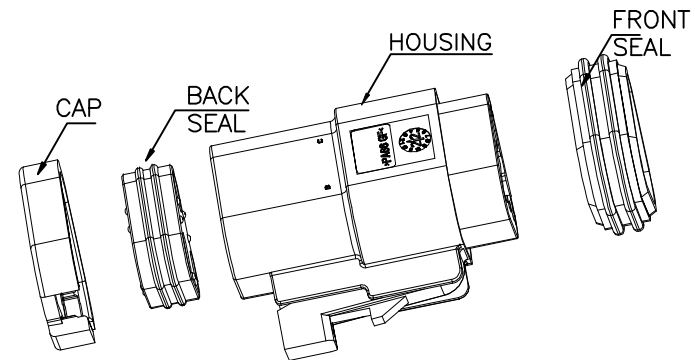

Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±3.0°	X.±0.30
.X'±2.0°	.X±0.25
.XX'±1.0°	.XX±0.20
.XXX'±0.5°	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


AGZ060-HA-N


PART NO.

AGZ060-03APA-N

TITLE.

3 WAY PLUG
STANDARD SEAL
SHORT CAP GT SERIES

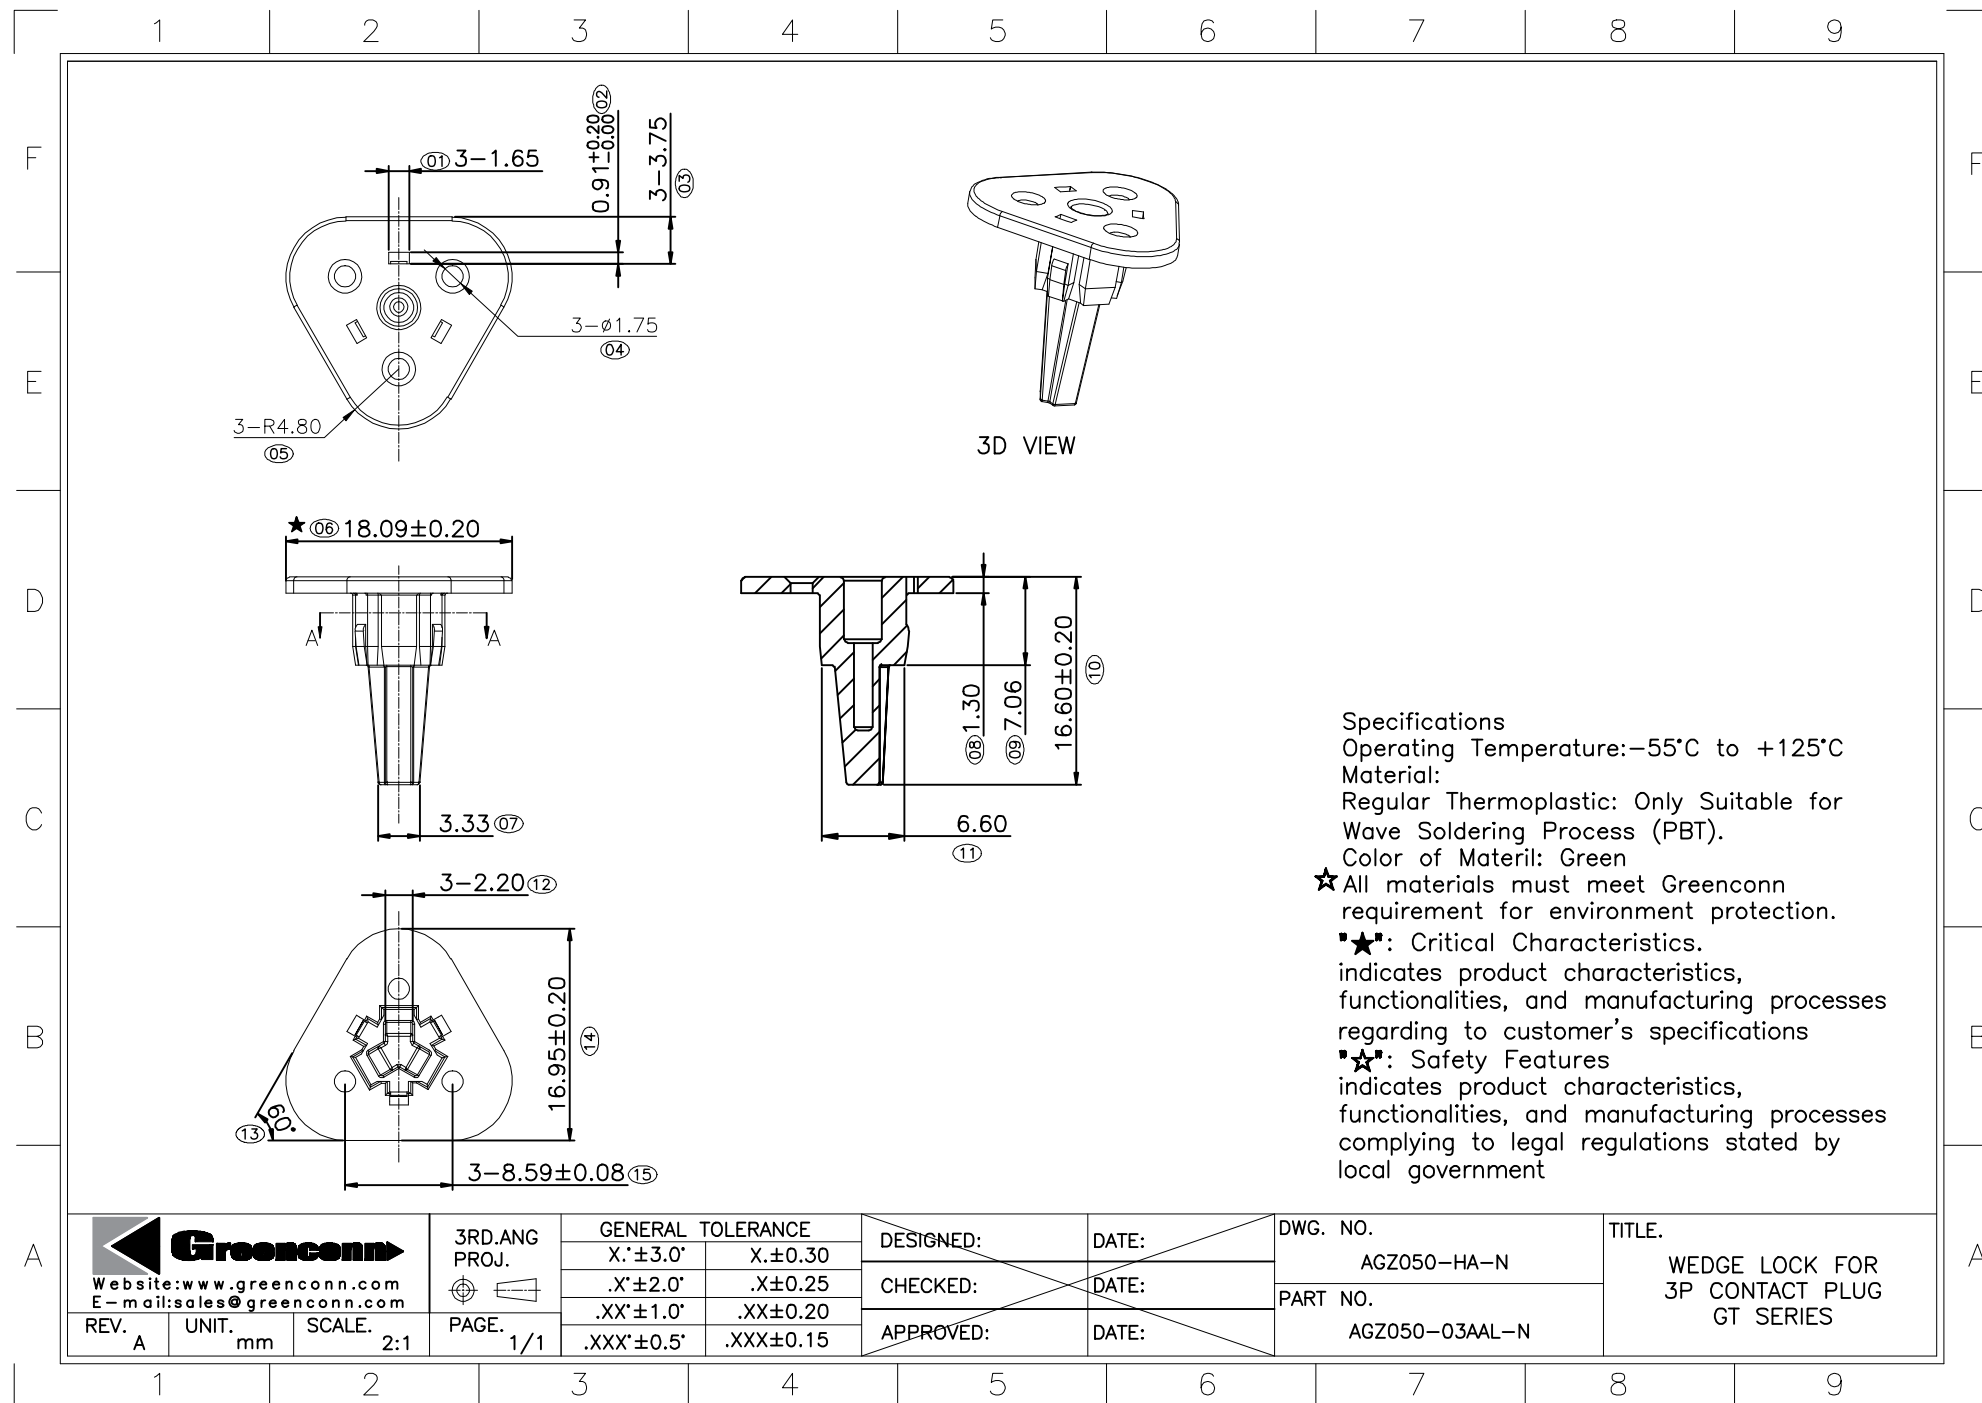

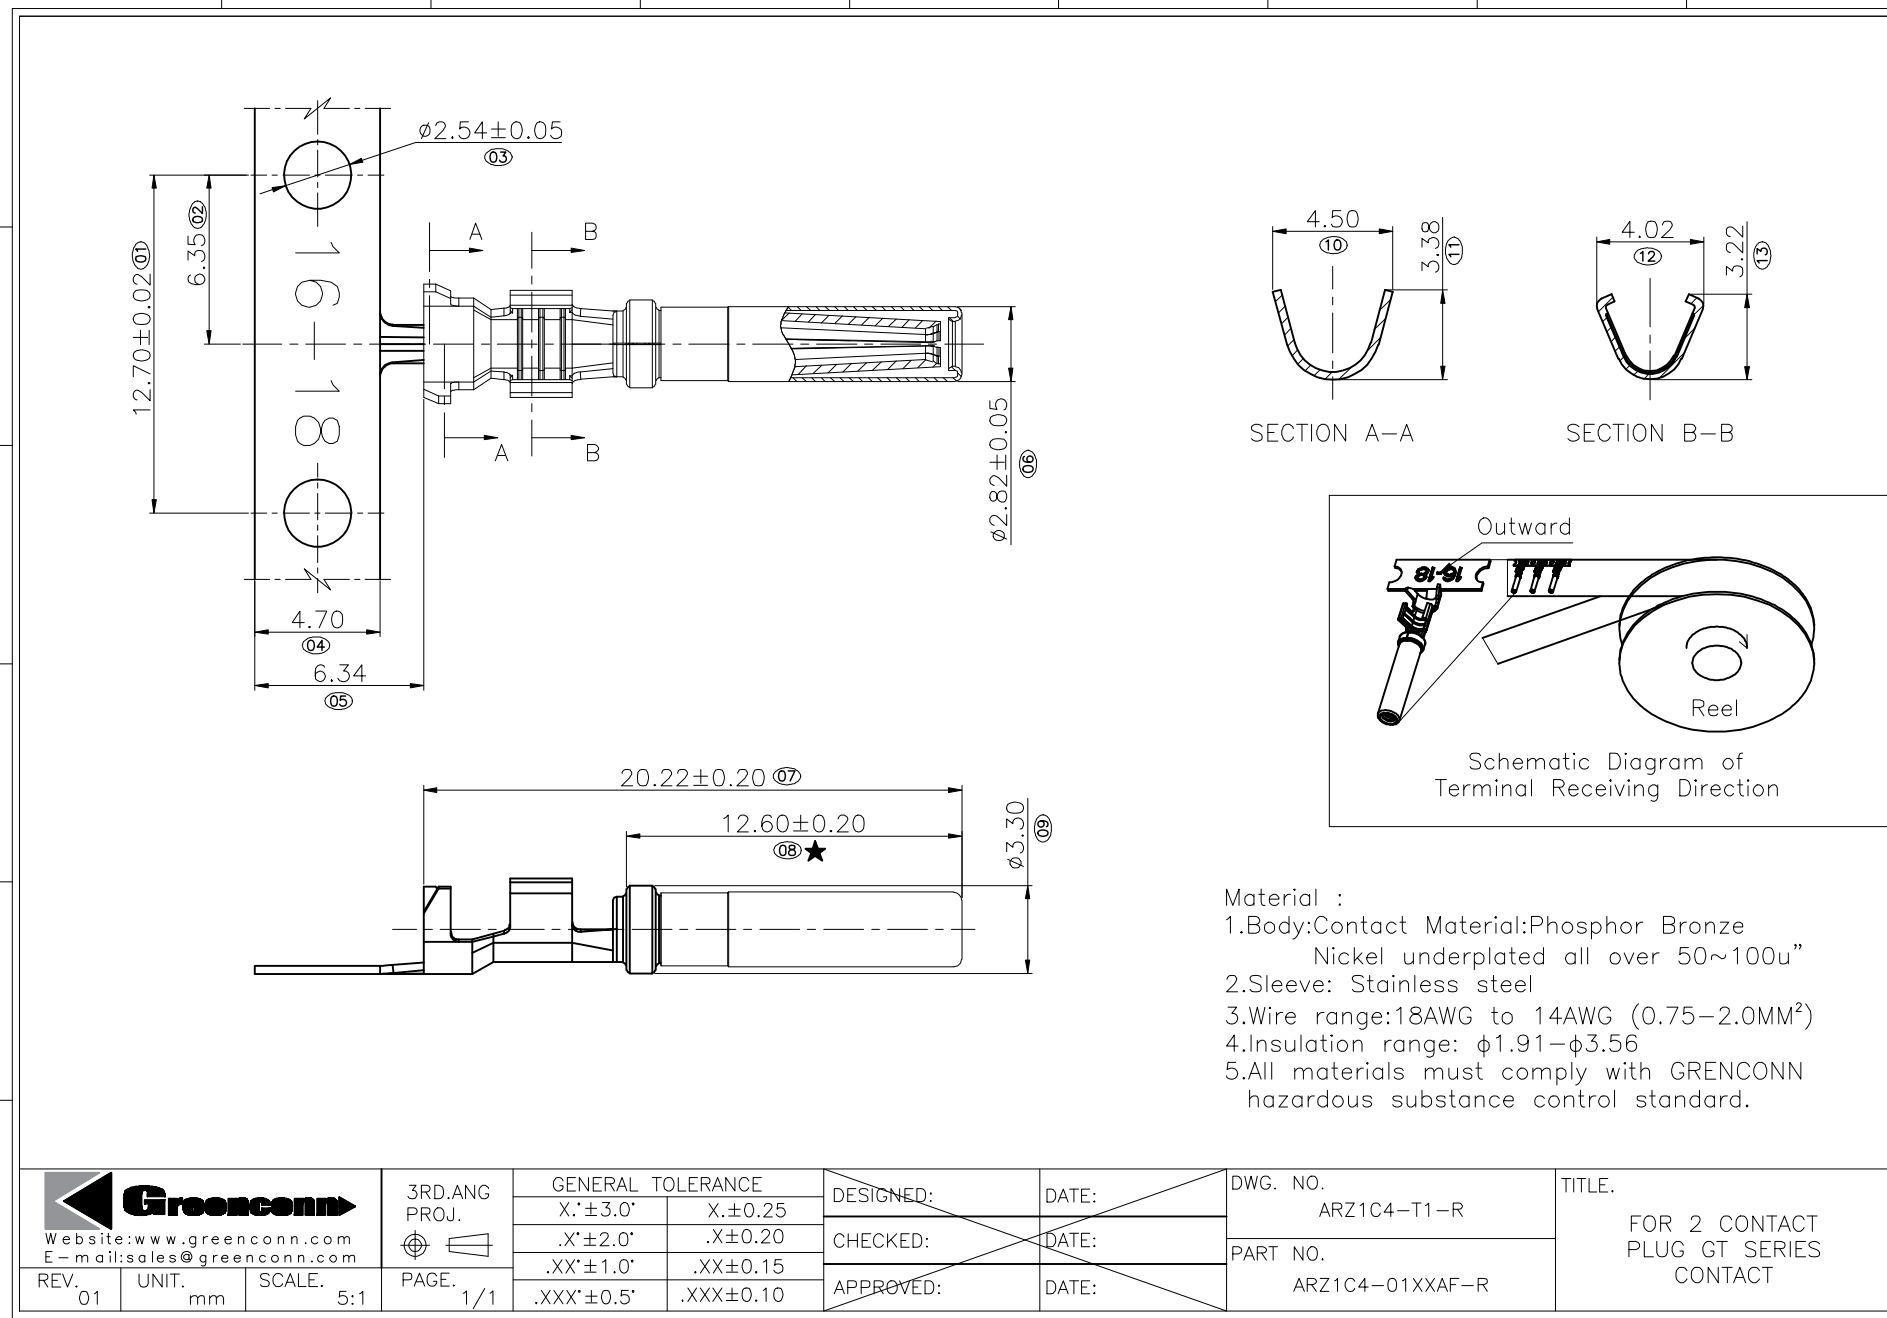

Material :
1.Body:Contact Material:Phosphor Bronze
Nickel underplated all over 50~100u"
2.Sleeve: Stainless steel
3.Wire range:18AWG to 14AWG (0.75~2.0MM²)
4.Insulation range: φ1.91~φ3.56
5.All materials must comply with GRENNCONN
hazardous substance control standard.

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. ARZ1C4-T1-R	TITLE. FOR 2 CONTACT PLUG GT SERIES CONTACT
				X'±3.0'	X±0.25			PART NO. ARZ1C4-01XXAF-R	
				.X'±2.0'	.X±0.20				
				.XX'±1.0'	.XX±0.15				
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1	.XXX'±0.5'	.XXX±0.10				