





INKJET CODE Description : XX X XX XX


XX-YEAR: 20 = 2020
X-MONTH: A = JAN, B = FEB,.....
XX-DAY: 14 = 14th DAY
XX-HOUR: 14 = 14 PM

Specifications

Current Rating:13.0Amp AC/DC
Voltage Rating: 48V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-55°C to +125°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 PA66
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.
★: Significant Characteristics.




VIEW A

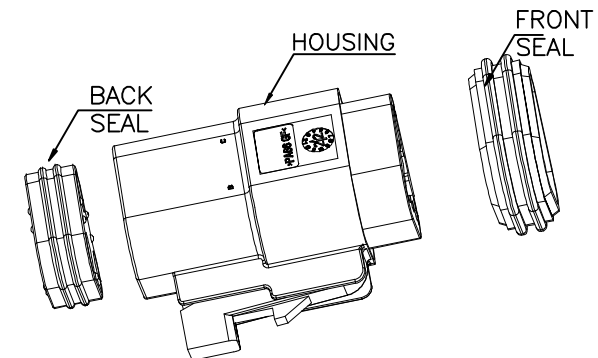

Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


AGZ070-HA-N


PART NO.

AGZ070-03APA-N

TITLE.

3 WAY PLUG
STANDARD SEAL
SHORT CAP GT SERIES

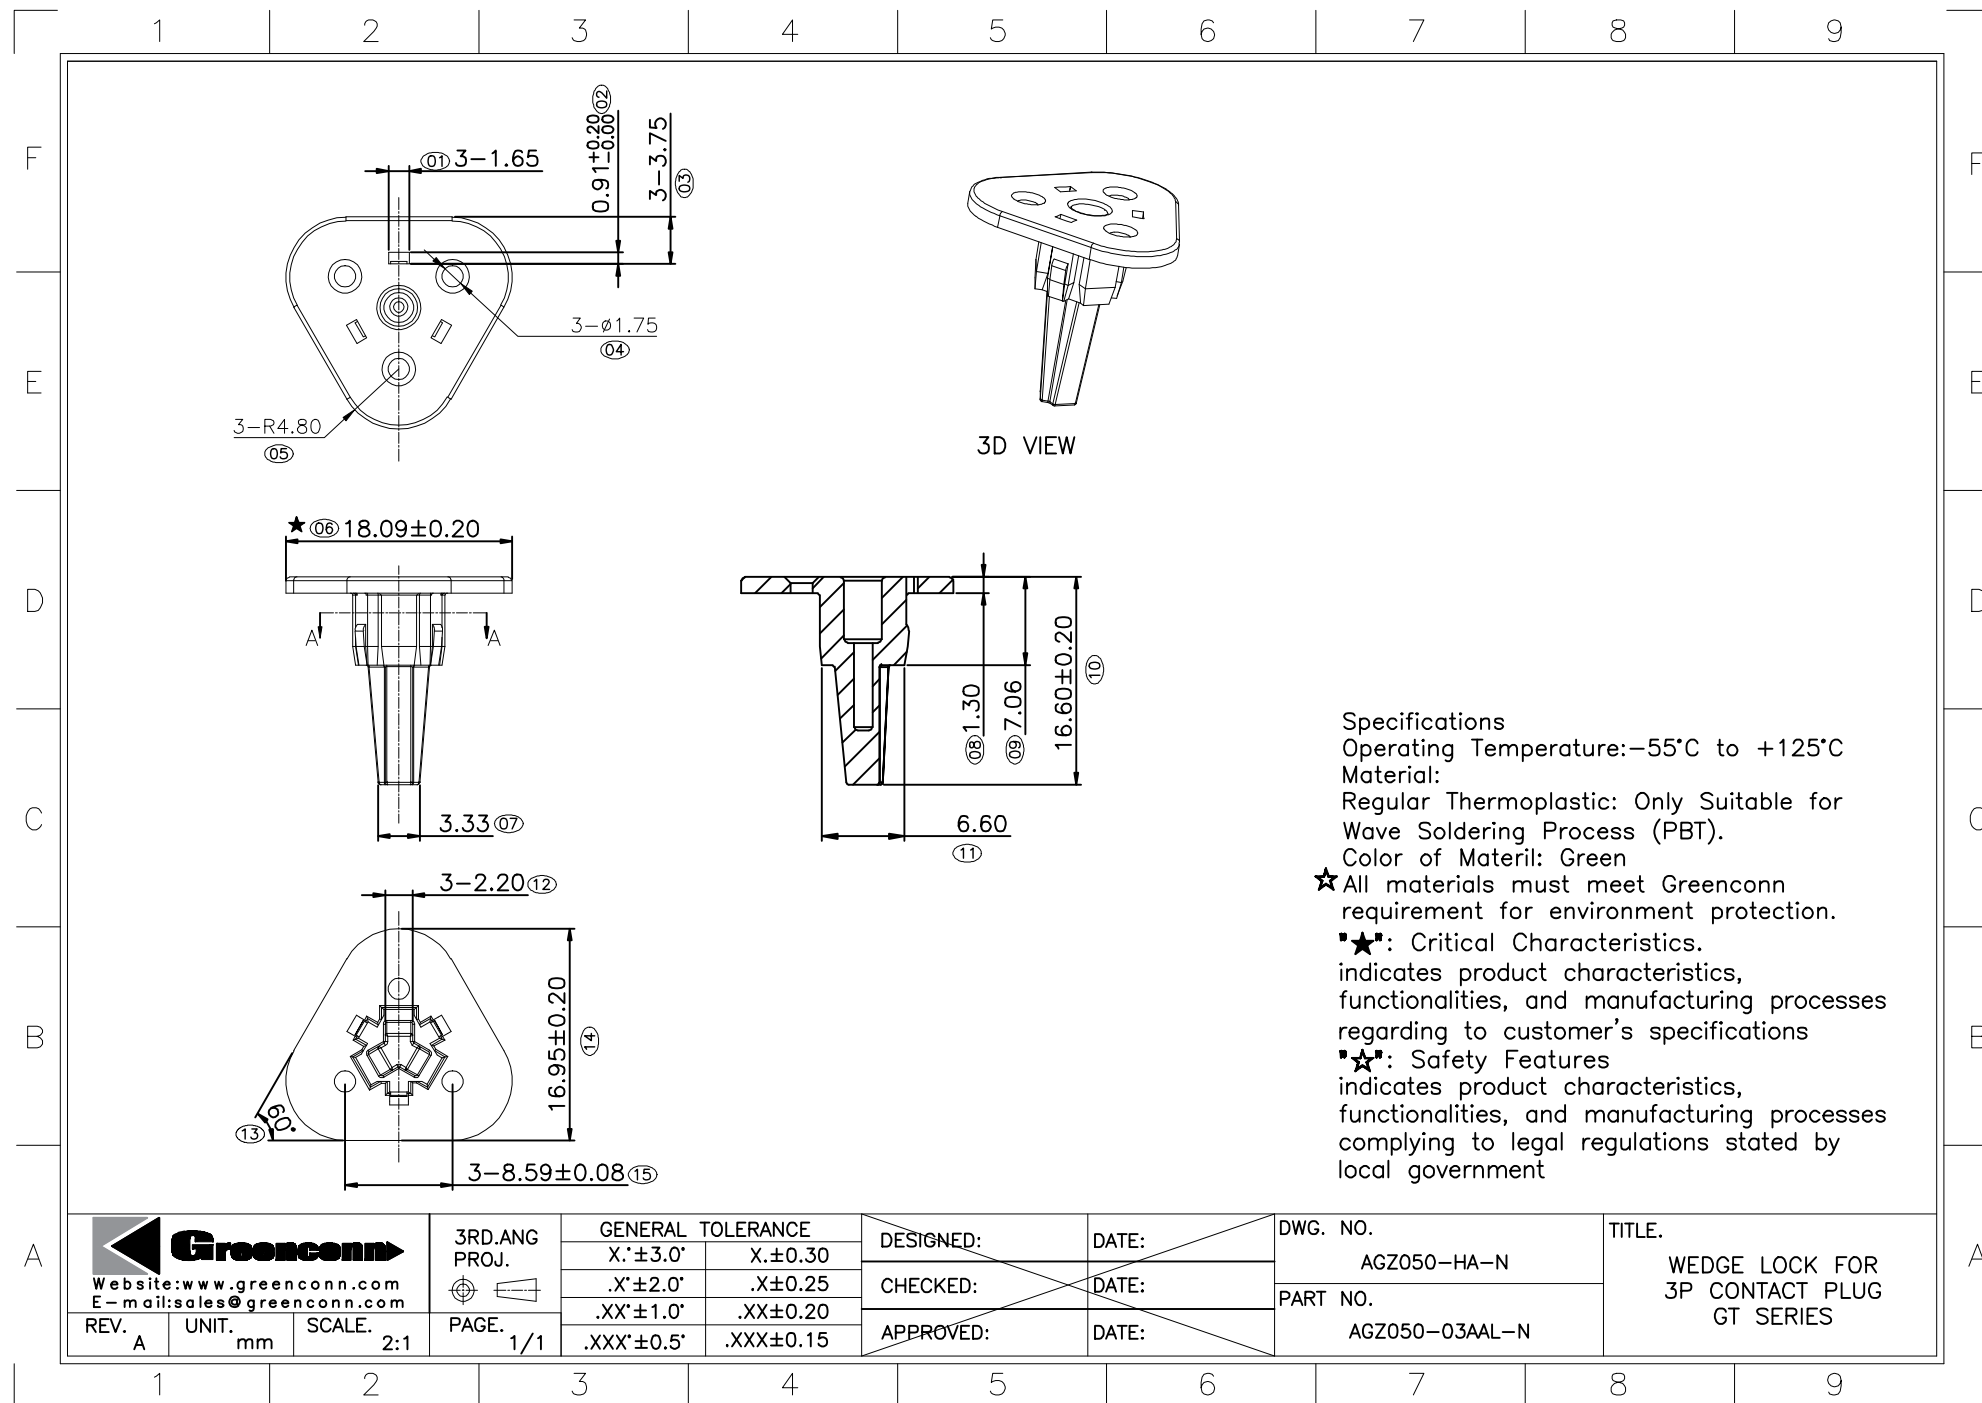

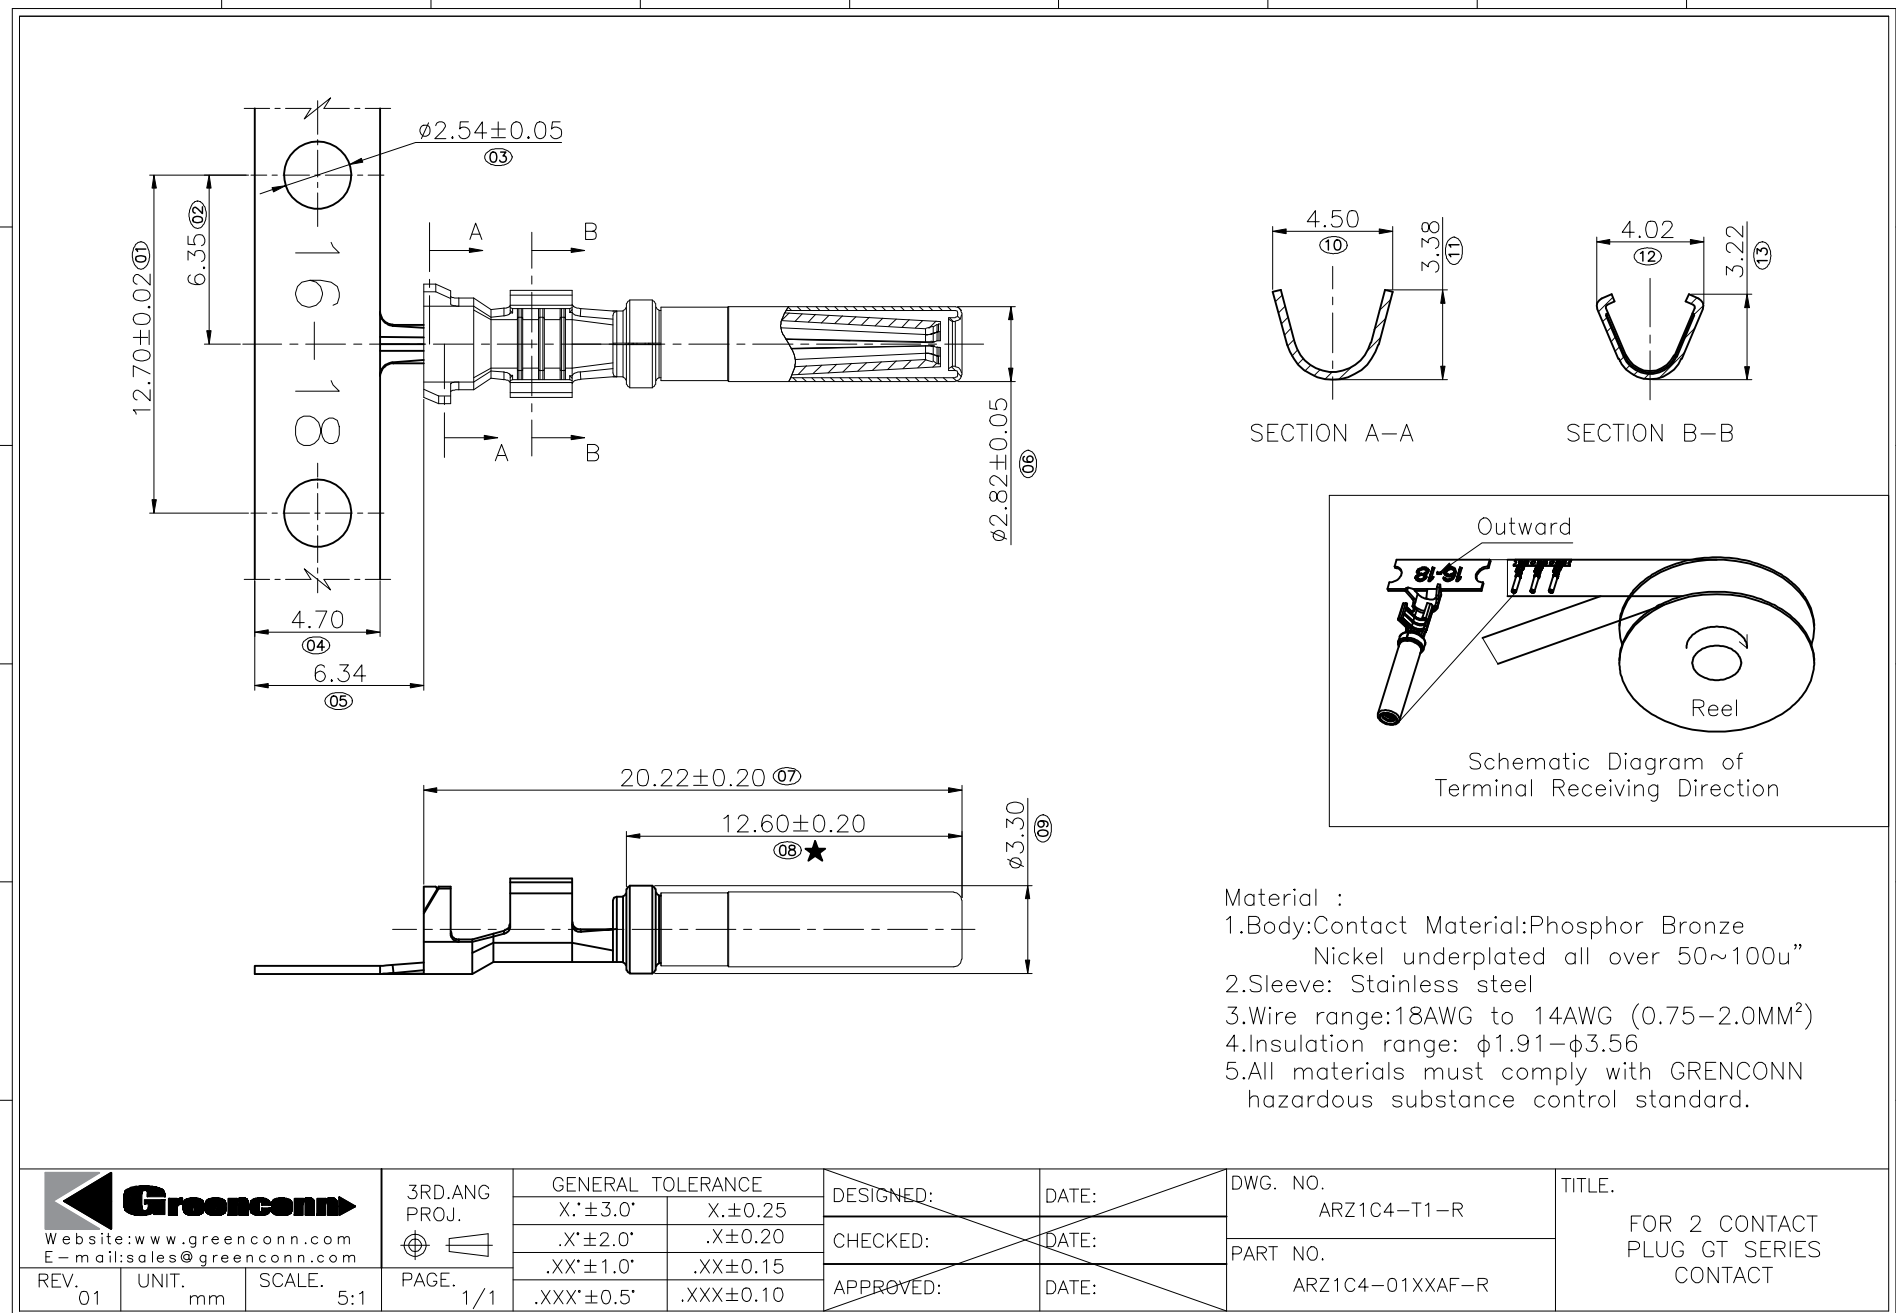

Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. 01 UNIT. mm SCALE. 5:1

3RD.ANG
PROJ.
3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X'±3.0'	X±0.25
.X'±2.0'	.X±0.20
.XX'±1.0'	.XX±0.15
.XXX'±0.5'	.XXX±0.10

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

ARZ1C4-T1-R

PART NO.

ARZ1C4-01XXAF-R

TITLE.

FOR 2 CONTACT
PLUG GT SERIES
CONTACT