
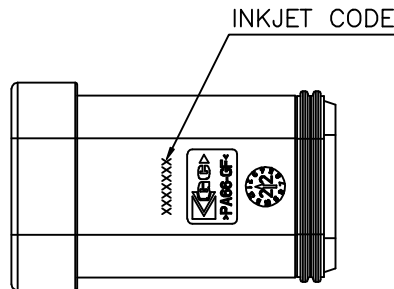




INKJET CODE Description: XX X XX XX

XX-YEAR: 20 = 2020
X-MONTH: A = JAN, B = FEB,.....
XX-DAY: 14 = 14th DAY
XX-HOUR: 14 = 14 PM



Specifications

Current Rating 14 AWG: 13.0Amp AC/DC
16 AWG: 13.0Amp AC/DC
18 AWG: 10.0Amp AC/DC
20 AWG: 7.5Amp AC/DC


Voltage Rating: 250V AC/DC.
Insulation Resistance: 1000MΩMin.
Dielectric Withstanding Voltage: 1500VAC
Contact Resistance: 20mΩMax.
Operating Temperature: -55°C to +125°C
Materials

Insulator Material: High Temperature Thermoplastic, UL 94V-0 PA66 or the equivalent material

★ All materials must meet Greenconn hazardous substances control standards.

★: Critical Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications


★: Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

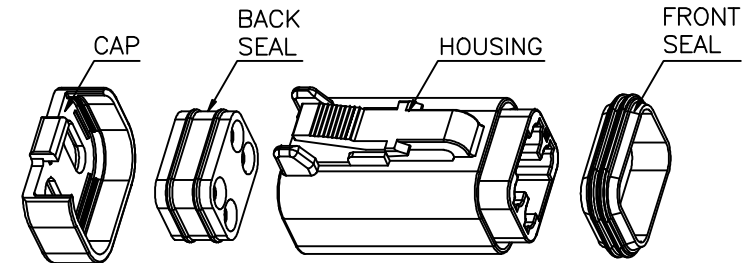

Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.



AGZ131-HA

PART NO.


AGZ131-04APA

TITLE.


4 WAY PLUG
STANDARD SEAL
GT SERIES

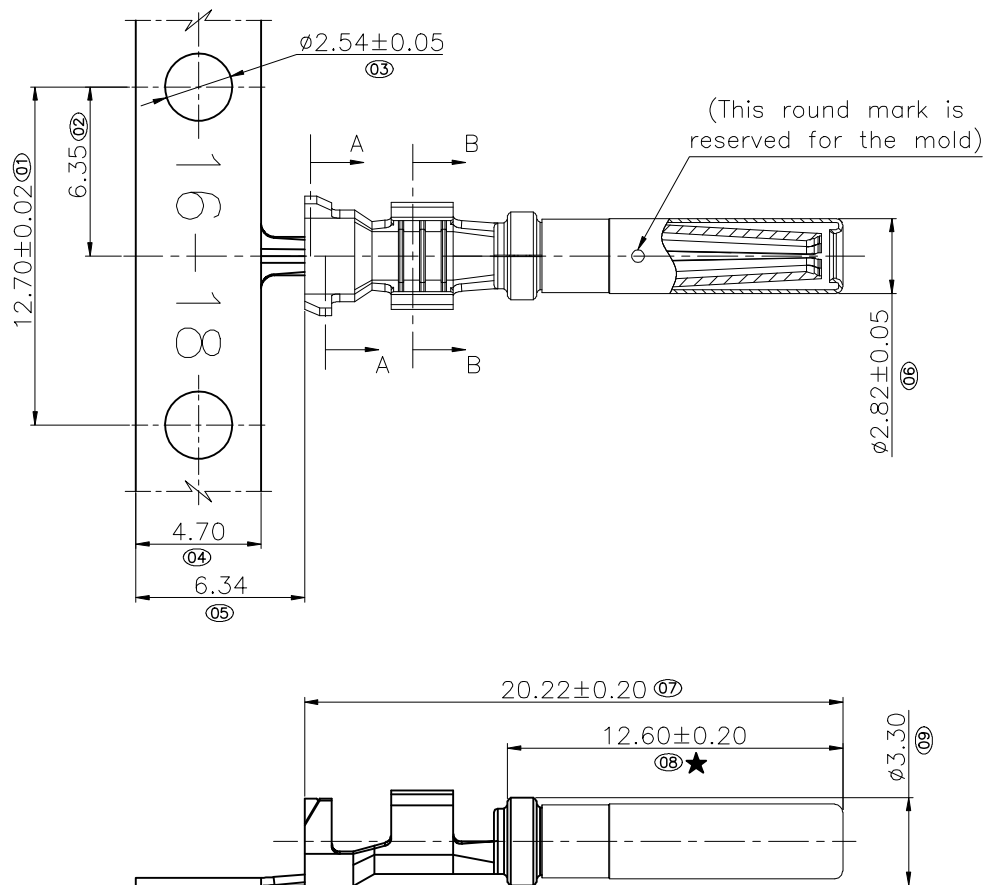

SECTION A-A



SECTION B-B

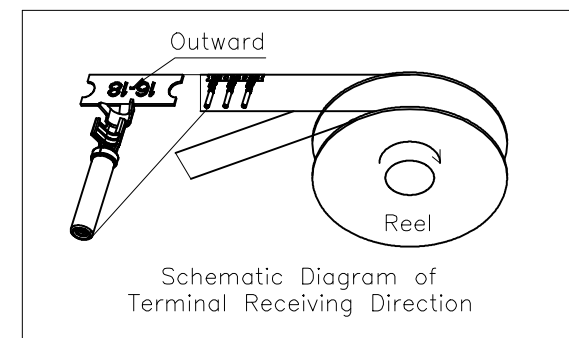

Material :
 1.Body:Contact Material:Phosphor Bronze
 Nickel underplated all over 50~100u"
 2.Sleeve: Stainless steel
 3.Wire range:18AWG to 14AWG (0.75~2.0MM²)
 4.Insulation range: $\phi 1.91$ ~ $\phi 3.56$
 5.All materials must comply with GRENNCONN hazardous substance control standard.



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 5:1

3RD.ANG
 PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X' ± 3.0	X ± 0.25
.X' ± 2.0	.X ± 0.20
.XX' ± 1.0	.XX ± 0.15
.XXX' ± 0.5	.XXX ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.





ARZ1C4-T1-R

PART NO.

ARZ1C4-01XXAB-R

TITLE.

FOR 2 CONTACT
 PLUG GT SERIES
 CONTACT

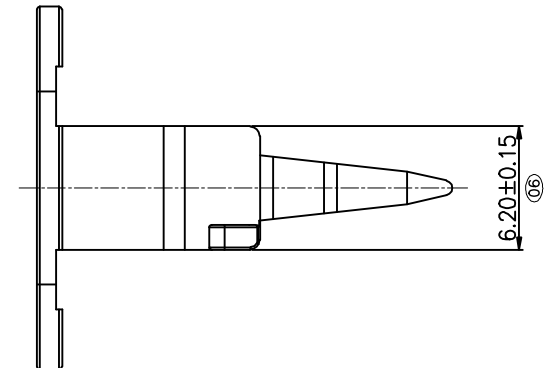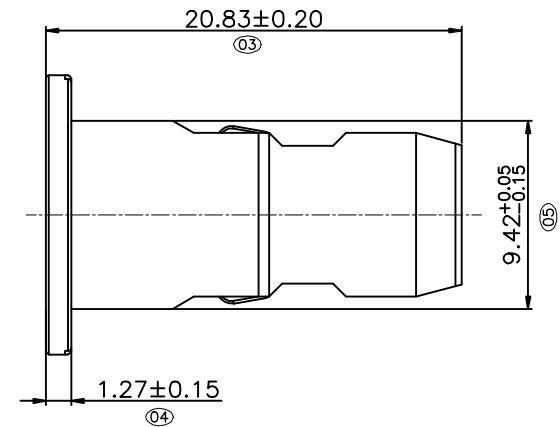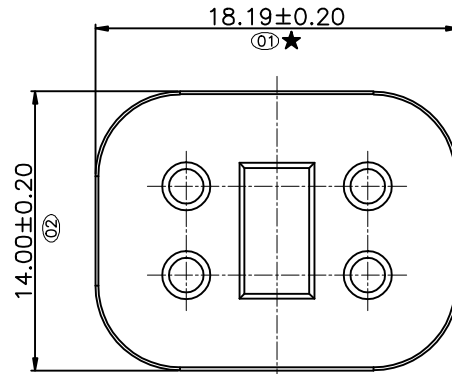

Specifications

Operating Temperature: -55°C to +125°C

Material:

Regular Thermoplastic: Only Suitable for Wave Soldering Process (PBT).

Color of Material: Green

★ All materials must meet Greenconn requirement for environment protection.

★ ★: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★ ★: Safety Features


indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
A	mm	2:1	1/1

3RD.ANG
PROJ.



GENERAL TOLERANCE

X. ±3.0'	X. ±0.30
.X' ±2.0'	.X ±0.25
.XX' ±1.0'	.XX ±0.20
.XXX' ±0.5'	.XXX ±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

AGZ111-HA

PART NO.

AGZ111-04AAL

TITLE.

WEDGE LOCK FOR
4 CONTACT PLUG
GT SERIES