
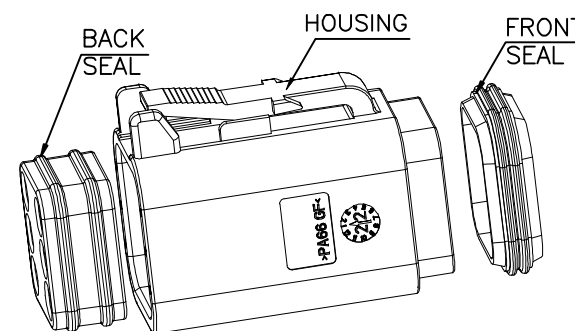




INKJET CODE Description : XX X XX XX

XX-YEAR: 20 = 2020
X-MONTH: A = JAN, B = FEB,.....
XX-DAY: 14 = 14th DAY
XX-HOUR: 14 = 14 PM

Specifications

Current Rating:13.0Amp AC/DC
Voltage Rating: 48V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-55°C to +125°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 PA66
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.
★: Significant Characteristics.

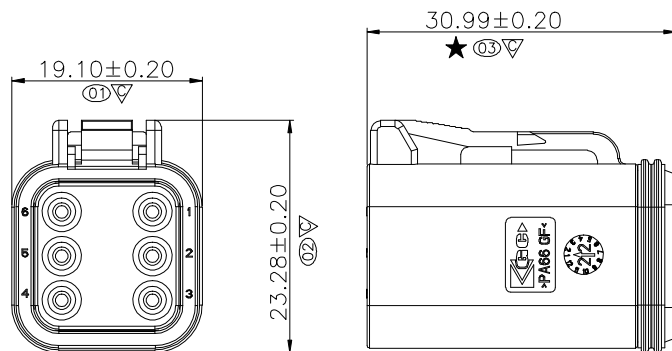

REV. A UNIT. mm SCALE. 3:2

3RD.ANG
PROJ.
PAGE. 1/1


GENERAL TOLERANCE	
X.'±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15


DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
AGZ372-HA-N
PART NO.
AGZ372-06APA-N

TITLE.
6 WAY PLUG
STANDARD SEAL
SHORT CAP GT SERIES

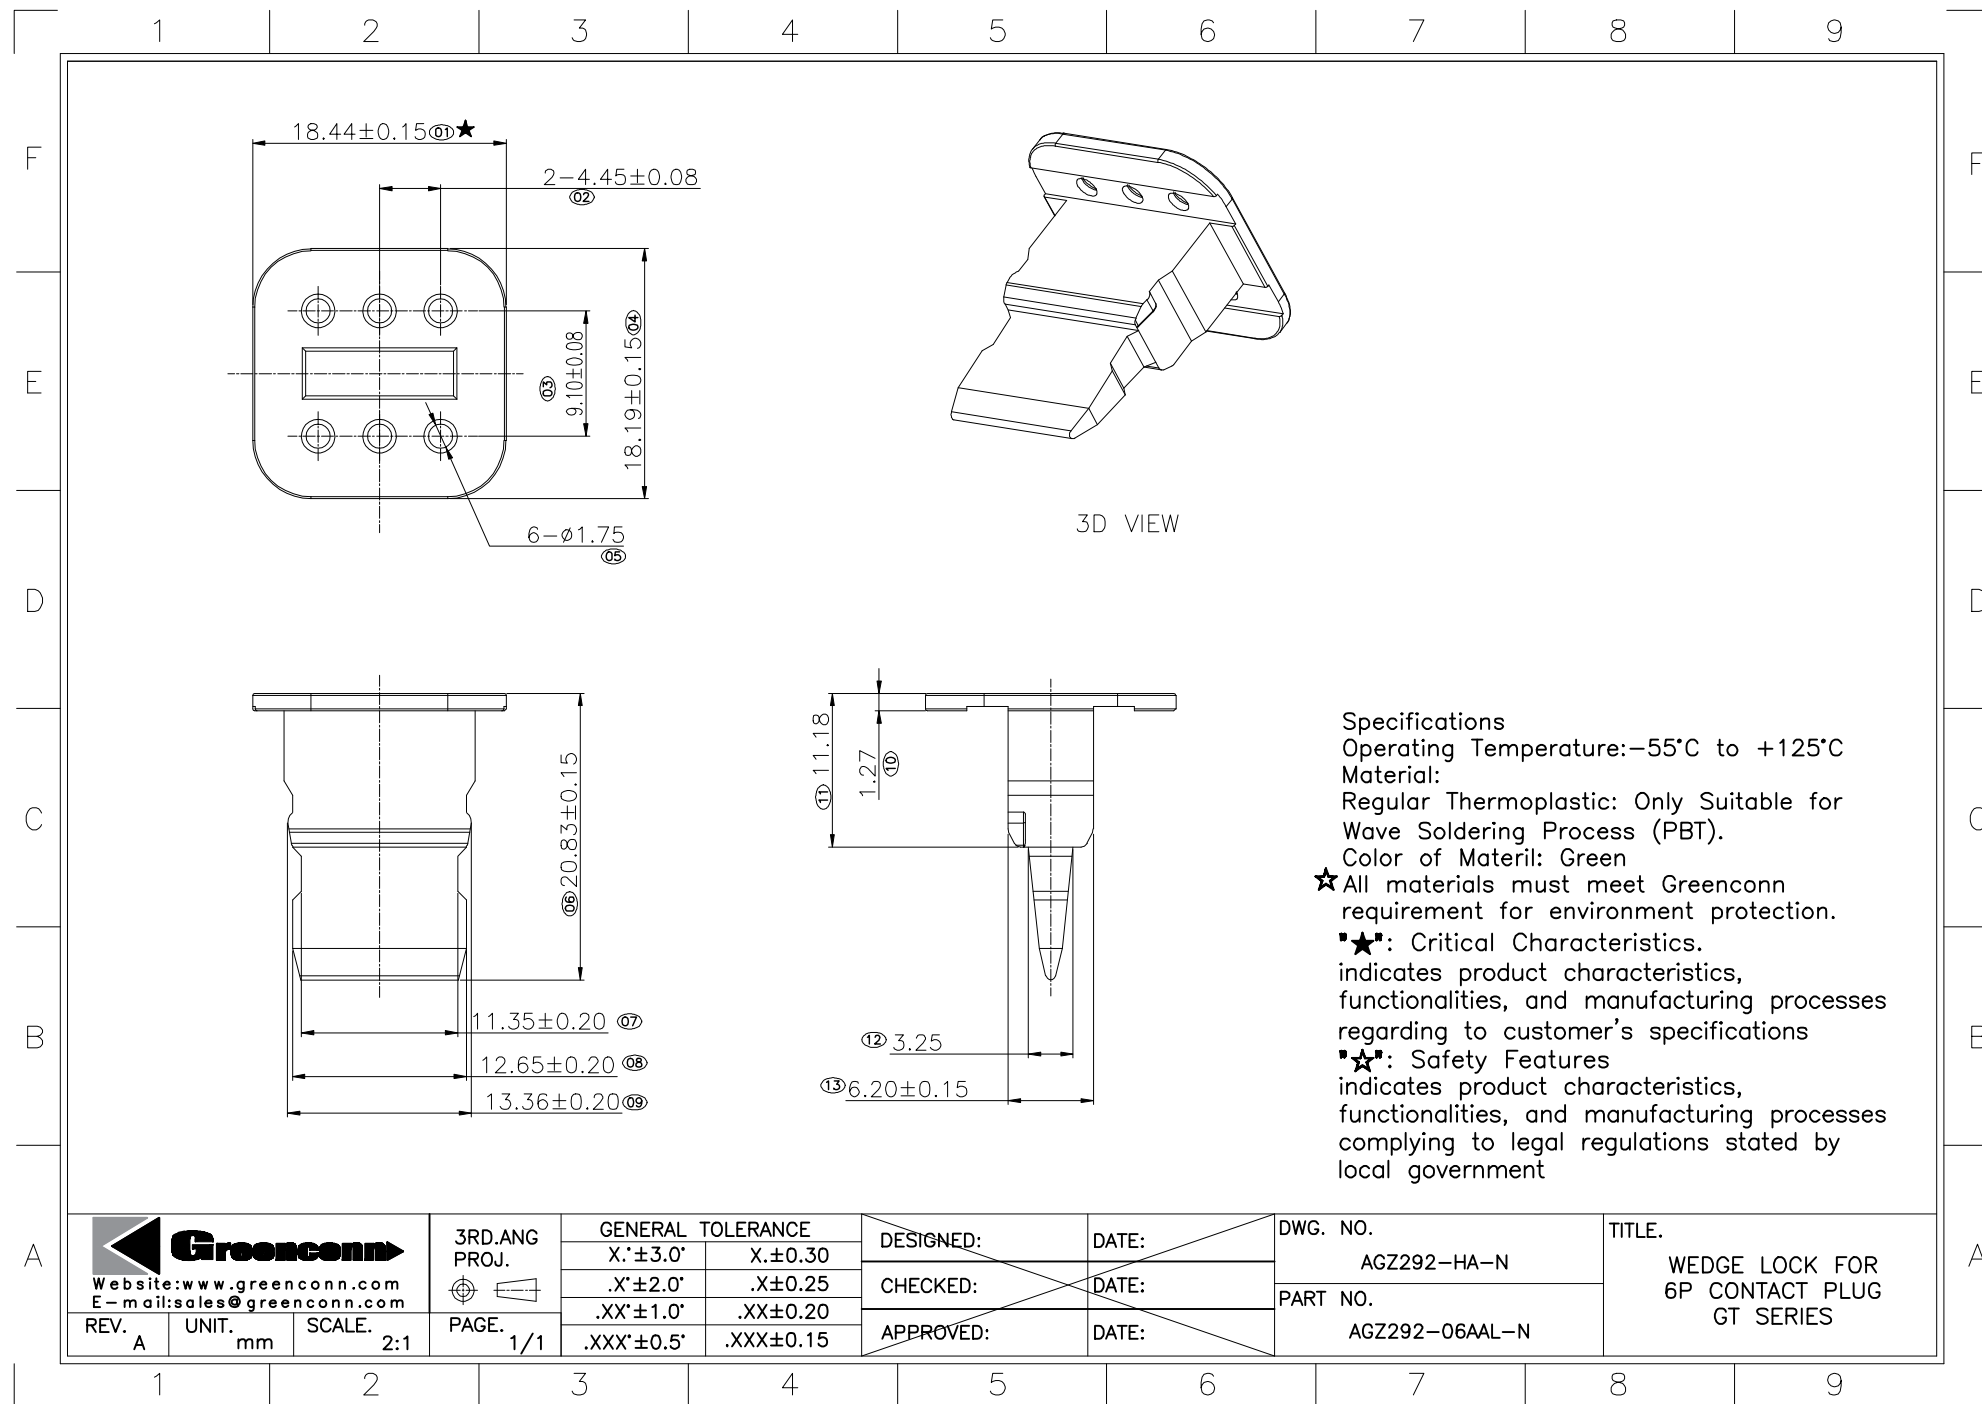

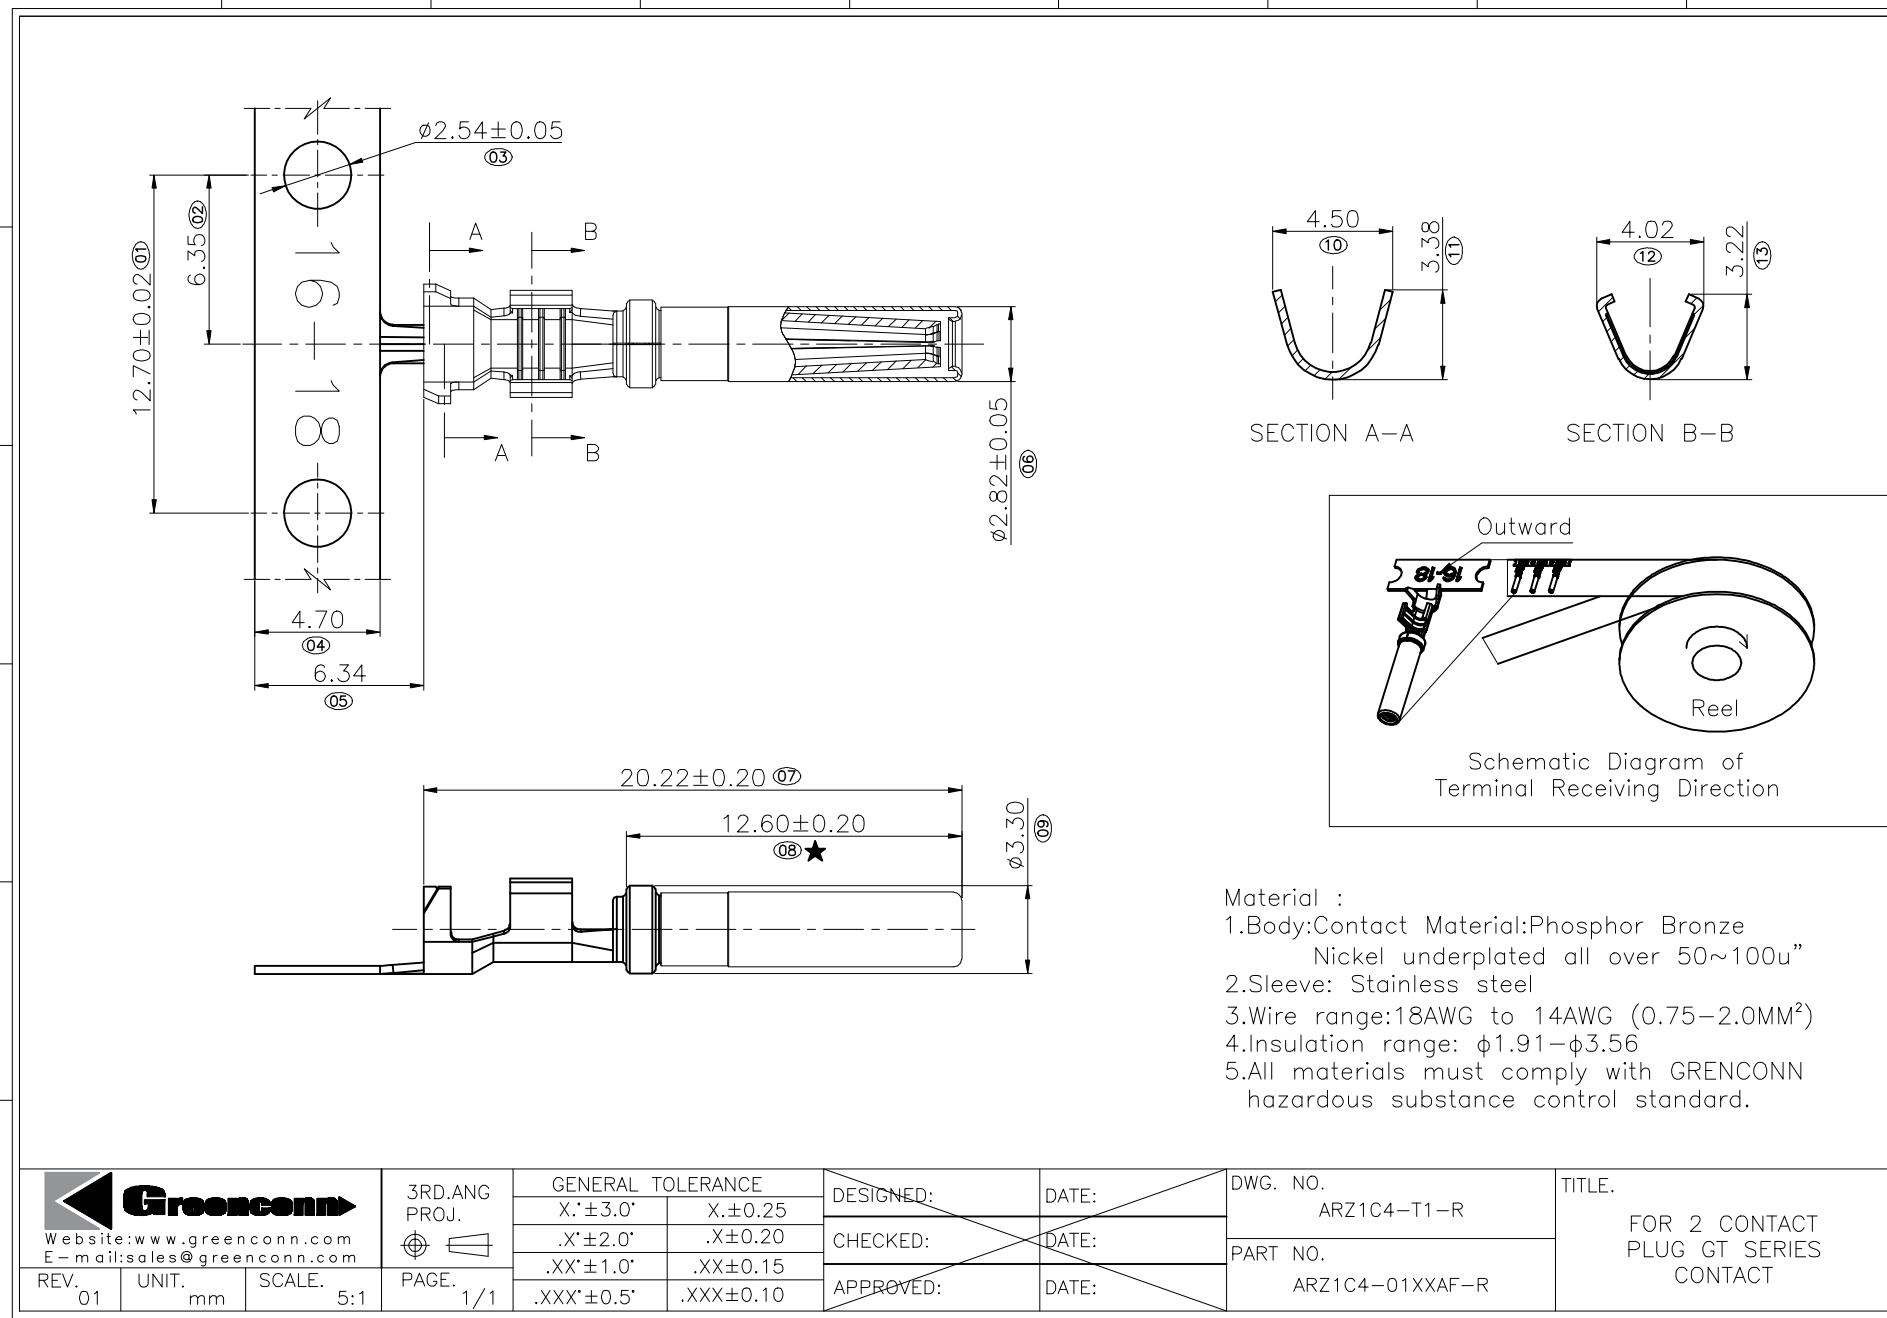

Material :
1.Body:Contact Material:Phosphor Bronze
Nickel underplated all over 50~100u"
2.Sleeve: Stainless steel
3.Wire range:18AWG to 14AWG (0.75~2.0MM²)
4.Insulation range: φ1.91~φ3.56
5.All materials must comply with GRENNCONN
hazardous substance control standard.

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ. 		GENERAL TOLERANCE		DESIGNED: DATE:		DWG. NO. ARZ1C4-T1-R		TITLE. FOR 2 CONTACT PLUG GT SERIES CONTACT	
					X'±3.0'	X±0.25						
		.X'±2.0'	.X±0.20	CHECKED: DATE:								
		.XX'±1.0'	.XX±0.15									
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1	.XXX'±0.5'	.XXX±0.10	APPROVED: DATE:		PART NO. ARZ1C4-01XXAF-R				