
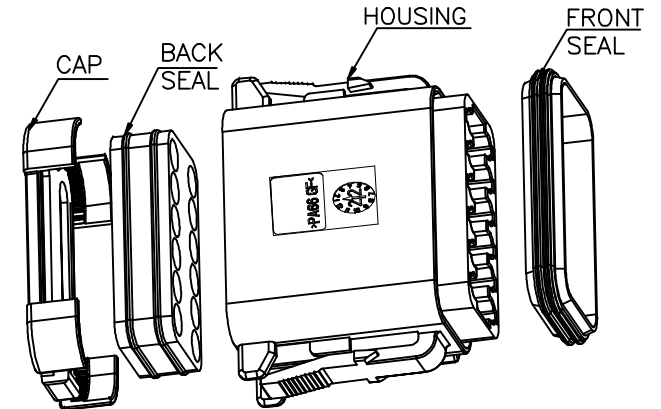

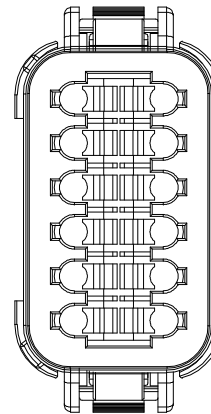
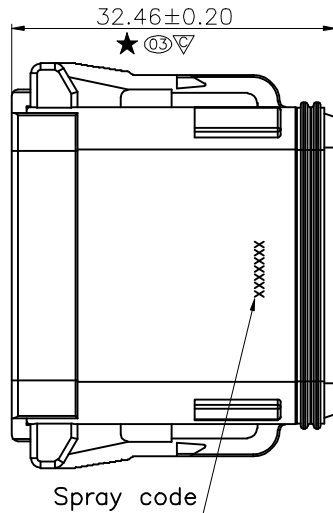


INKJET CODE Description: XX X XX XX

XX-YEAR: 20 = 2020  
X-MONTH: A = JAN, B = FEB,.....  
XX-DAY: 14 = 14th DAY  
XX-HOUR: 14 = 14 PM

#### Specifications


Current Rating:13.0Amp AC/DC  
Voltage Rating: 48V AC/DC.  
Insulation Resistance:1000MΩMin.  
Dielectric Withstanding Voltage:1500VAC  
Contact Resistance:20mΩMax.  
Operating Temperature:-55°C to +125°C  
Materials  
Contact Material:Brass  
Insulator Material:High Temperature  
Thermoplastic, UL 94V-0 PA66  
or the equivalent material  
All materials must meet Greenconn  
hazardous substances control standards.  
★: Significant Characteristics.

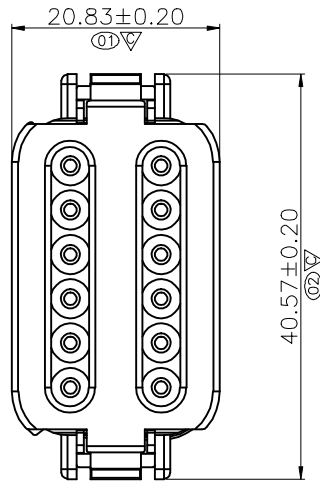

Website:www.greenconn.com  
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD.ANG  
PROJ.



PAGE. 1/1

#### GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X.±3.0'    | X.±0.30   |
| .X'±2.0'   | .X±0.25   |
| .XX'±1.0'  | .XX±0.20  |
| .XXX'±0.5' | .XXX±0.15 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.



AGZ362-HA-N

PART NO.



AGZ362-12APA-N

TITLE.

12 WAY PLUG  
STANDARD SEAL  
SHORT CAP GT SERIES

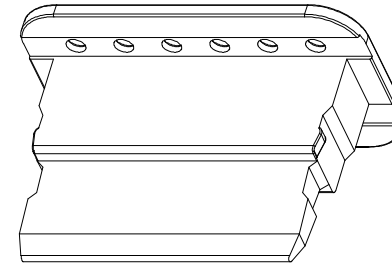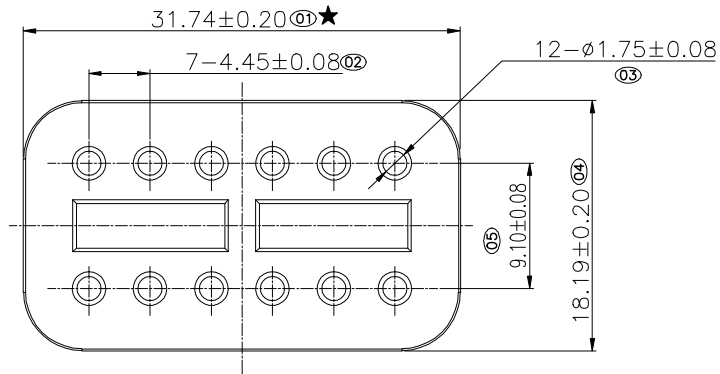

12PIN 3D VIEW

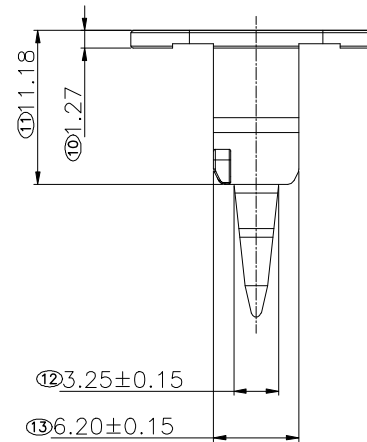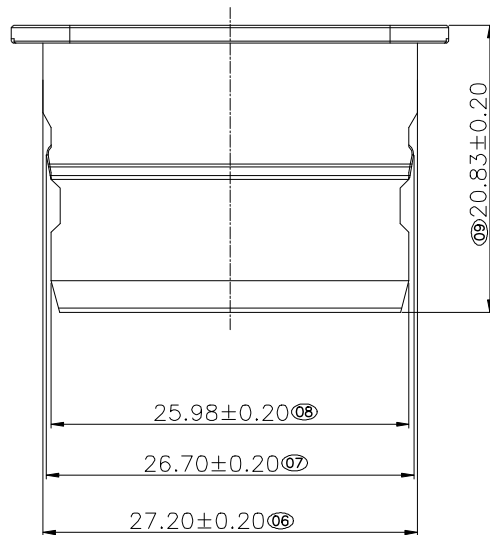

**Specifications**  
 Operating Temperature: -55°C to +125°C  
 Material:  
 Regular Thermoplastic: Only Suitable for Wave Soldering Process (PBT).  
 Color of Material: Green  
 ★ All materials must meet Greenconn requirement for environment protection.  
 ★★: Critical Characteristics.  
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications  
 ★★: Safety Features  
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

**Greenconn**  
 Website: www.greenconn.com  
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 2:1

3RD. ANG  
 PROJ.  
 PAGE. 1/1



**GENERAL TOLERANCE**  
 X. ± 3.0' X. ± 0.30  
 .X' ± 2.0' .X ± 0.25  
 .XX' ± 1.0' .XX ± 0.20  
 .XXX' ± 0.5' .XXX ± 0.15

DESIGNED:  
 CHECKED:  
 APPROVED:


DATE:  
 DATE:  
 DATE:

DWG. NO.  
 AGZ332-HA-N  
 PART NO.  
 AGZ332-12AAL-N


TITLE.  
 WEDGE LOCK FOR  
 12P CONTACT PLUG  
 GT SERIES

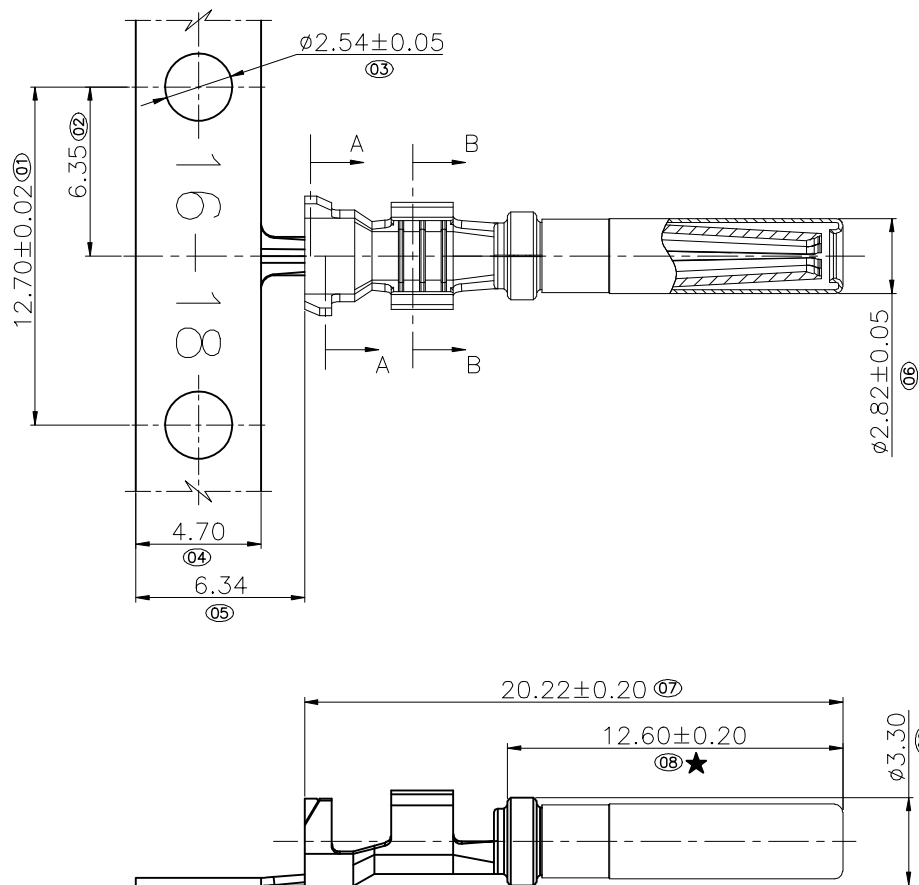

SECTION A-A



SECTION B-B

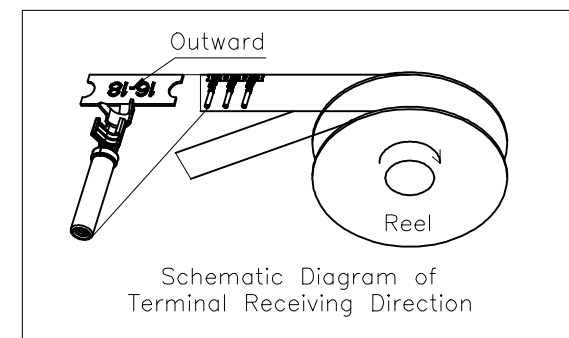


Material :  
 1.Body:Contact Material:Phosphor Bronze  
 Nickel underplated all over 50~100u"  
 2.Sleeve: Stainless steel  
 3.Wire range:18AWG to 14AWG (0.75~2.0MM<sup>2</sup>)  
 4.Insulation range:  $\phi 1.91-\phi 3.56$   
 5.All materials must comply with GRENNCONN  
 hazardous substance control standard.



Website:www.greenconn.com  
 E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 5:1

3RD.ANG  
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X'±3.0'    | X±0.25    |
| .X'±2.0'   | .X±0.20   |
| .XX'±1.0'  | .XX±0.15  |
| .XXX'±0.5' | .XXX±0.10 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

ARZ1C4-T1-R

PART NO.

ARZ1C4-01XXAF-R

TITLE.

FOR 2 CONTACT  
 PLUG GT SERIES  
 CONTACT