

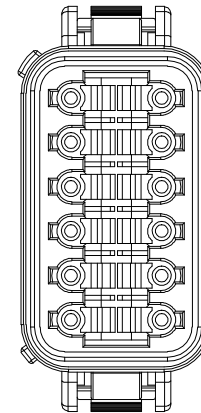

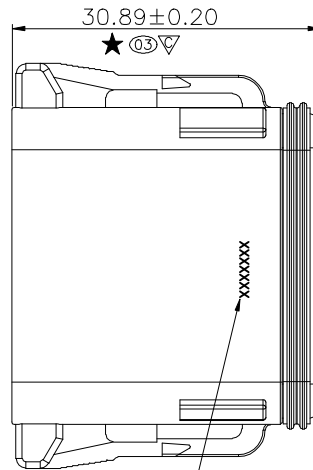


INKJET CODE Description : XX X XX XX

XX-YEAR: 20 = 2020
X-MONTH: A = JAN, B = FEB,.....
XX-DAY: 14 = 14th DAY
XX-HOUR: 14 = 14 PM

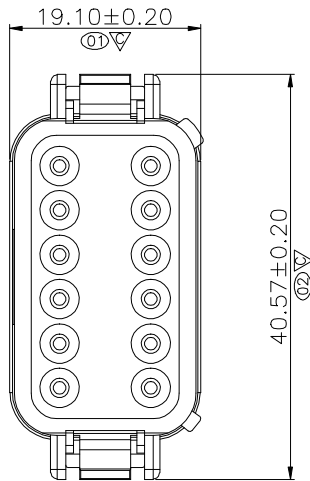


Specifications
Current Rating:13.0Amp AC/DC
Voltage Rating: 48V AC/DC.
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-55°C to +125°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 PA66
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.
★: Significant Characteristics.

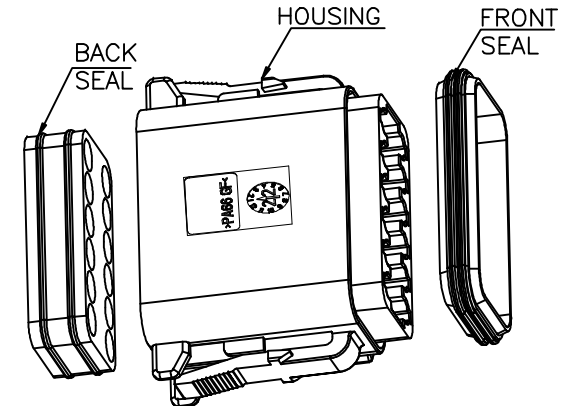

Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 3:2

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±3.0'	X.±0.30
.X'±2.0'	.X±0.25
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.



AGZ392-HA-N

PART NO.



AGZ392-12APA-N

TITLE.

12 WAY PLUG
STANDARD SEAL
SHORT CAP GT SERIES

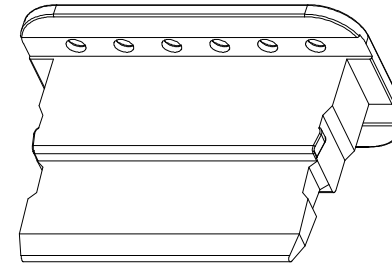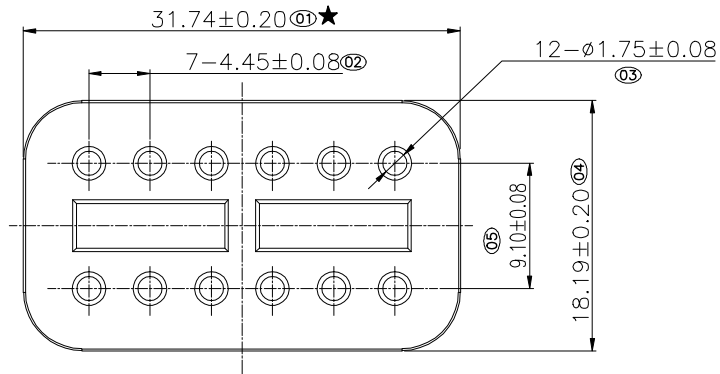

12PIN 3D VIEW

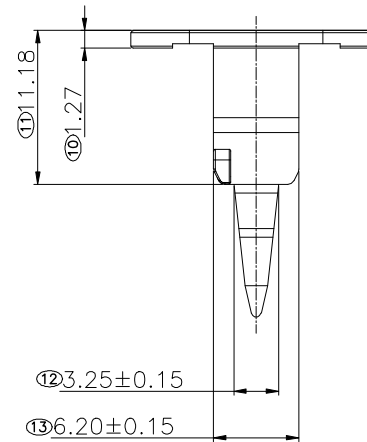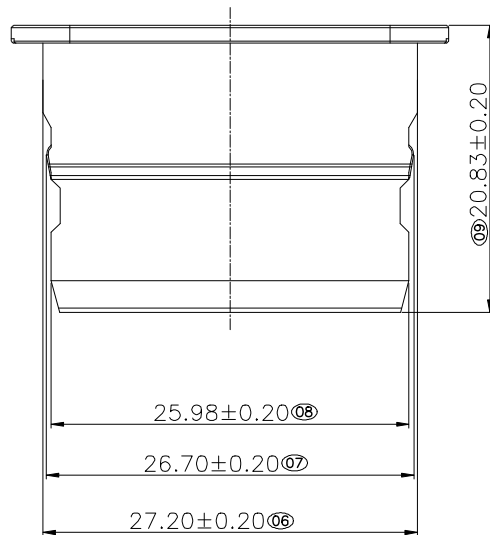

Specifications
 Operating Temperature: -55°C to +125°C
 Material:
 Regular Thermoplastic: Only Suitable for Wave Soldering Process (PBT).
 Color of Material: Green
 ★ All materials must meet Greenconn requirement for environment protection.
 ★★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ★★: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Greenconn
 Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 2:1

3RD. ANG
 PROJ.
 PAGE. 1/1


GENERAL TOLERANCE
 X. ± 3.0° X. ± 0.30
 .X' ± 2.0° .X ± 0.25
 .XX' ± 1.0° .XX ± 0.20
 .XXX' ± 0.5° .XXX ± 0.15

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 AGZ332-HA-N
 PART NO.
 AGZ332-12AAL-N

TITLE.
 WEDGE LOCK FOR
 12P CONTACT PLUG
 GT SERIES

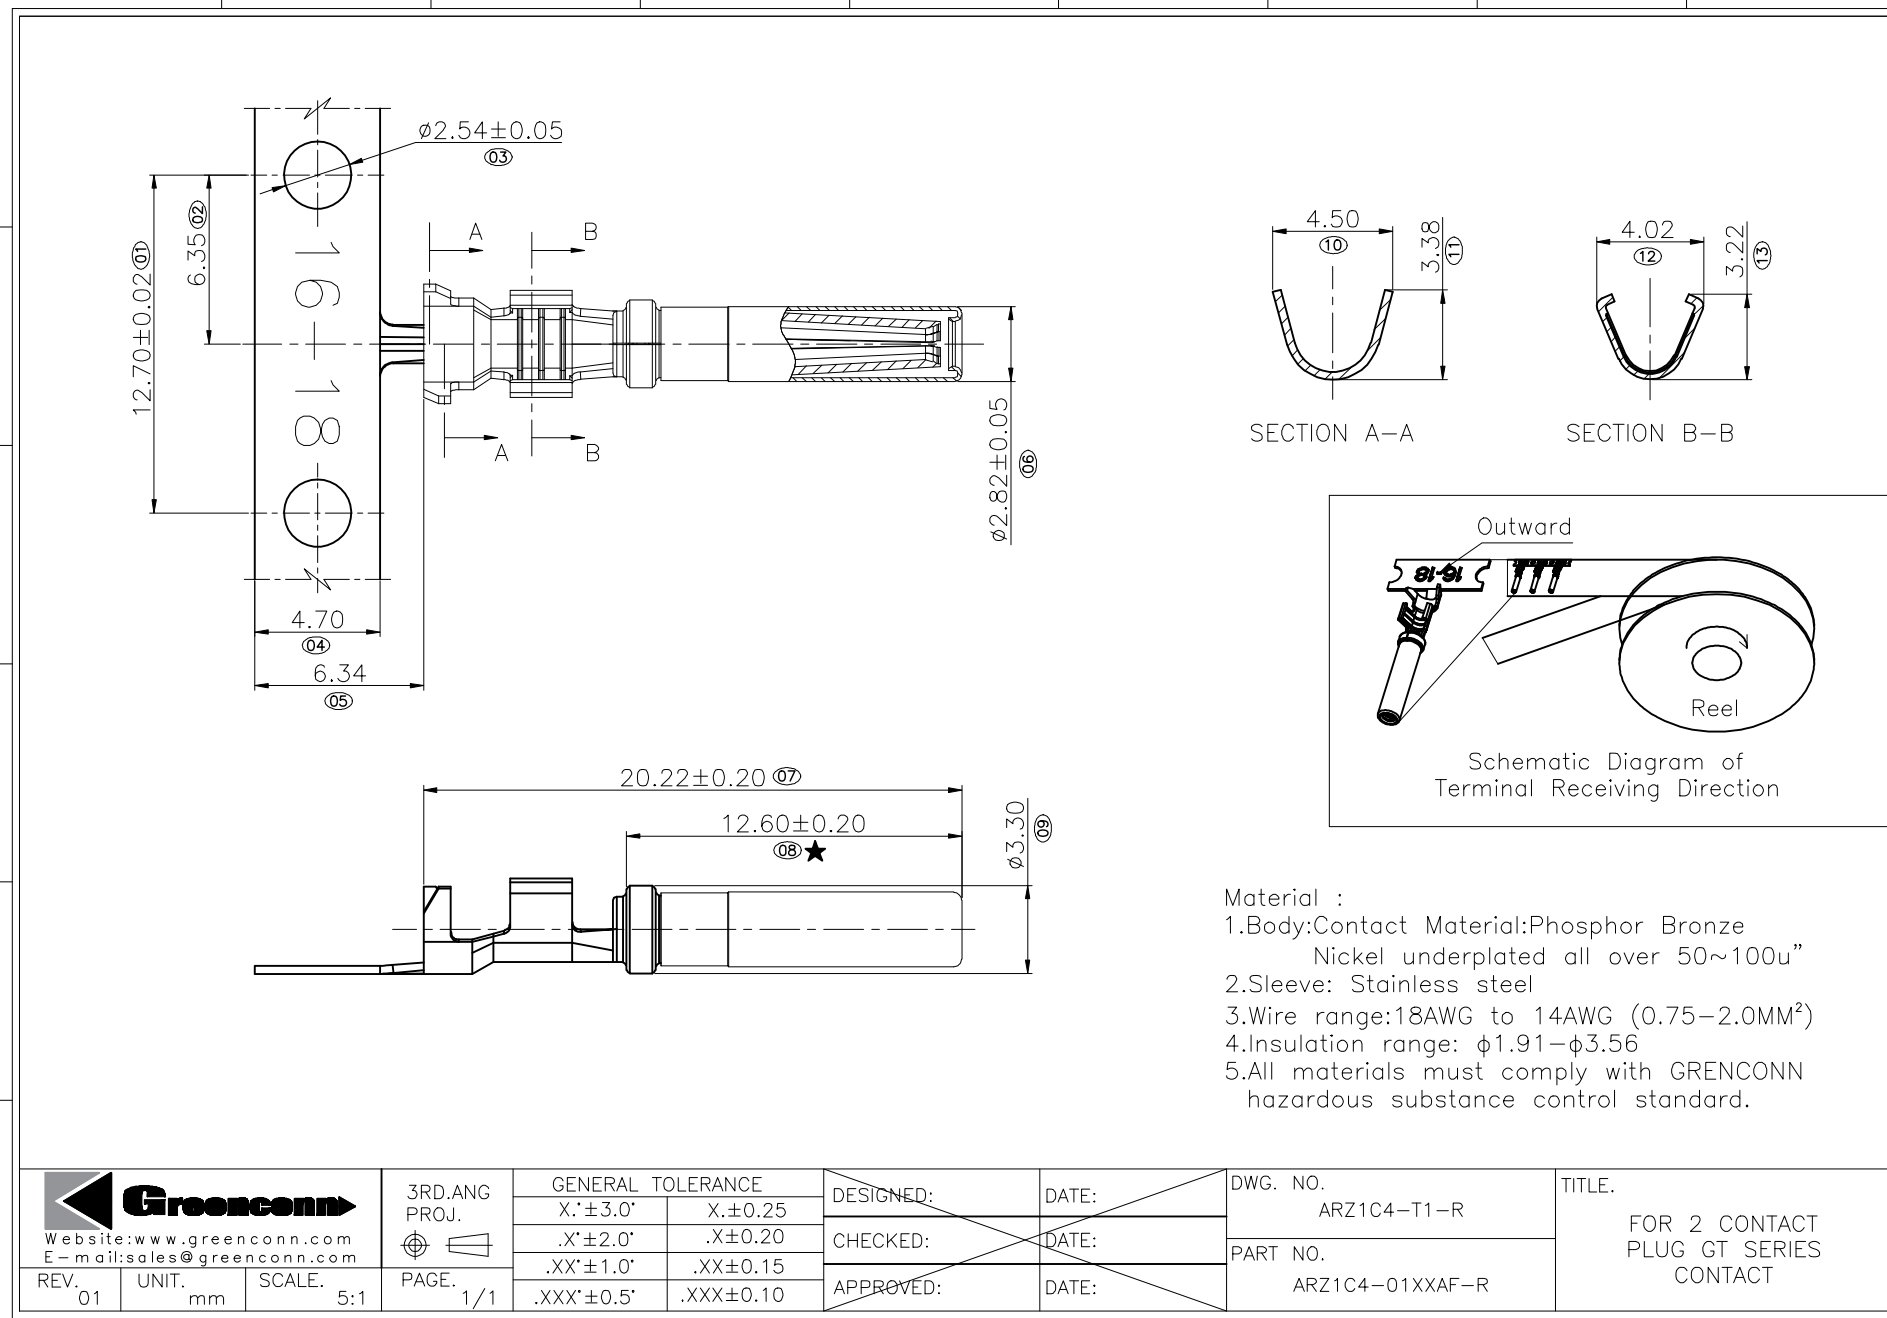

Material :
1.Body:Contact Material:Phosphor Bronze
Nickel underplated all over 50~100u"
2.Sleeve: Stainless steel
3.Wire range:18AWG to 14AWG (0.75~2.0MM²)
4.Insulation range: φ1.91~φ3.56
5.All materials must comply with GRENNCONN
hazardous substance control standard.

 Website:www.greenconn.com E-mail:sales@greenconn.com			3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO.	TITLE.
				X'±3.0'	X±0.25			ARZ1C4-T1-R	
				.X'±2.0'	.X±0.20			PART NO.	
				.XX'±1.0'	.XX±0.15			ARZ1C4-01XXAF-R	
REV.	UNIT.	SCALE.	PAGE.	.XXX'±0.5'	.XXX±0.10				FOR 2 CONTACT PLUG GT SERIES CONTACT
01	mm	5:1	1/1						