



FRONT VIEW




STEREOGRAM


Housing: PC,UL94V-2,Transparent.
Terminal: Copper Alloy
Shield: Bronze
Voltage:125 Volts AC.
Current rating:1.5AMP
Dielectric strength:1000 VAC RMS 50Hz or 60Hz,1MIN.
Insulation Resistance:1000 Mega ohms min@500V DCt
Contact Resistance: 50 Milliohms MAX
Operating Temperature: -40°C~+80°C
All materials must meet GREENCONN hazardous substances control standards.

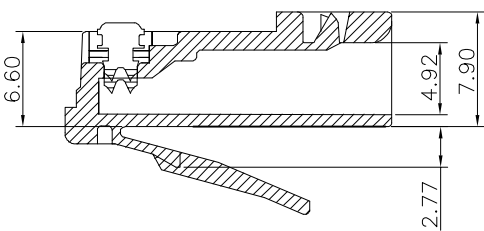

SECTION

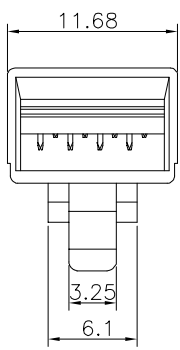

BACK VIEW

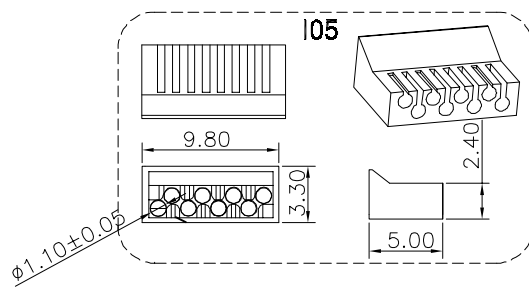

Ordering Information

G TZZ117 - 08 XX A 001 M X S X

Standard Plating
62=Gold 50u"/Tin

Color
F=Transparent

Standard Packing
N=PE Bag

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GTZZ117-CA1MS
PART NO.
GTZZ117-08XXA001MXSX

TITLE.
RJ45水晶頭 8P8C CAT6

REV.	UNIT.	SCALE.	PAGE.
B	mm	1:1	1/1