


Specifications  
 Current Rating:5AMP  
 Insulation Resistance:100MQMin.  
 Dielectric Withstanding Voltage:100VAC  
 Contact Resistance:40mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Insulator Material:High Temperature  
 Thermoplastic, UL 94V-0 LCP  
 All materials must meet GREENCONN  
 hazardous substances control standards.

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

GUAE205-1258A001CX9X	10NF CAPACITANCE	X7R,YELLOW	MOLD# 0402(1.0x0.5x0.35)	1PCS
	0 K RESISTANCE	N/A	MOLD# 0402(1.0x0.5x0.35)	1PCS
	TYPE C E-mark PCB	EM-888	T=0.80,COLOR:GREEN,HF	1PCS
	USB TYPE C PLUG	LCP,BLACK	FINISH: 1.CONTACTS:GOLD PLATED 30u; 2.SHELL:GUSTEN NICKEL	1PCS
GUAE205-1205A001CX9X	10NF CAPACITANCE	X7R,YELLOW	MOLD# 0402(1.0x0.5x0.35)	1PCS
	0 K RESISTANCE	N/A	MOLD# 0402(1.0x0.5x0.35)	1PCS
	TYPE C E-mark PCB	EM-888	T=0.80,COLOR:GREEN,HF	1PCS
	USB TYPE C PLUG	LCP,BLACK	FINISH: 1.CONTACTS:GOLD flash; 2.SHELL:GUSTEN NICKEL	1PCS
ASS'Y PART NO.	NAME	MATERIAL	REMARK	QTY

### Ordering Information

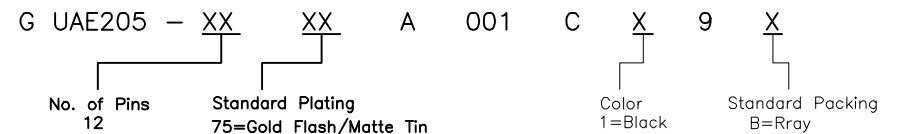

3RD.ANG PROJ.  
  
 PAGE. 1/1

GENERAL TOLERANCE	
X'±4.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±/	.XX±0.20
.XXX'±/	.XXX±0.10

DESIGNED:  
 CHECKED:  
 APPROVED:

DATE:  
 DATE:  
 DATE:

DWG. NO.  
 GUAE205-CA001C9  
 PART NO.  
 GUAE205-XXXX A001CX9X

TITLE.  
 USB TYPE C PLUG TYFL SPLINT  
 3.1PCB With out E-mark

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------