

F

E

D

C

B

A

F



E

D



C

B

A

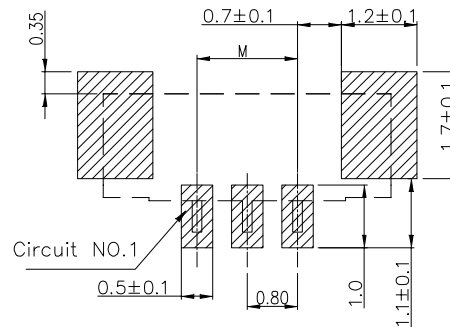

PCB LAYOUT

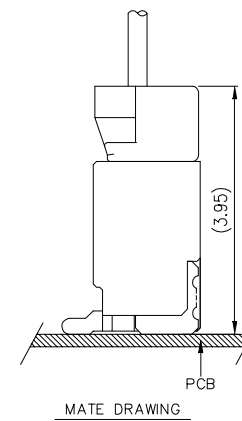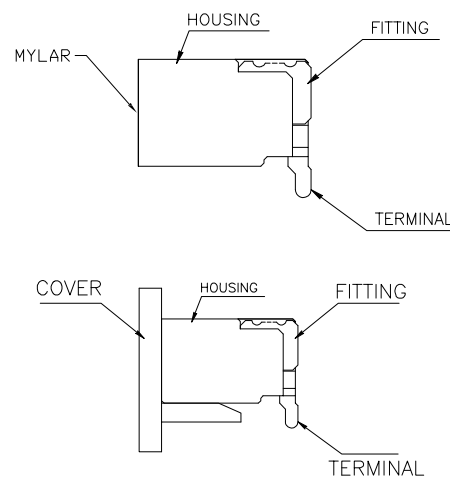

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMP. UL94V-0



TERMINAL:PHOSPER BRONZE(t=0.15)

FITTING NAIL:BRASS(t=0.2)

2.PLATING:

SEE PART NUMBER

No. of PIN/ROW	M	L1	L	N
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

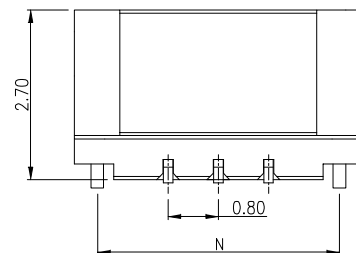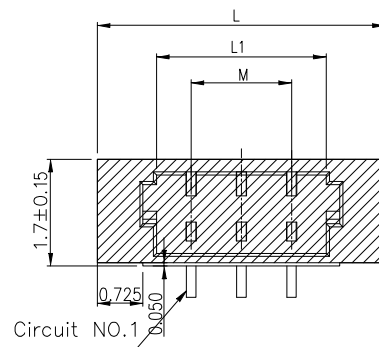

注：产品5Pin以下使用MYLAR，5Pin及以上Pin数产品使用盖子或MYLAR依料号编码决定。

Ordering Information


G	WBC104-XX	XX	A	001	C	X	A	X
No. of Pins per Row 02~20		Standard Plating 02=Gold Flash Selective Plating 01=Tin 22=Matte Tin 64=Gold3u"/Tin		Color 1=Black 2=White	Standard Packing H=Mylar+Tape&Reel Selective Packing F=Cap+Tape&Reel D=Tape&Reel B=Tray			



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±3.0'	X.±/
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.20
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWBC104-CA001

PART NO.

GWBC104-XXXXA001CXAX

TITLE.

0.8mm pitch 180° wafer