


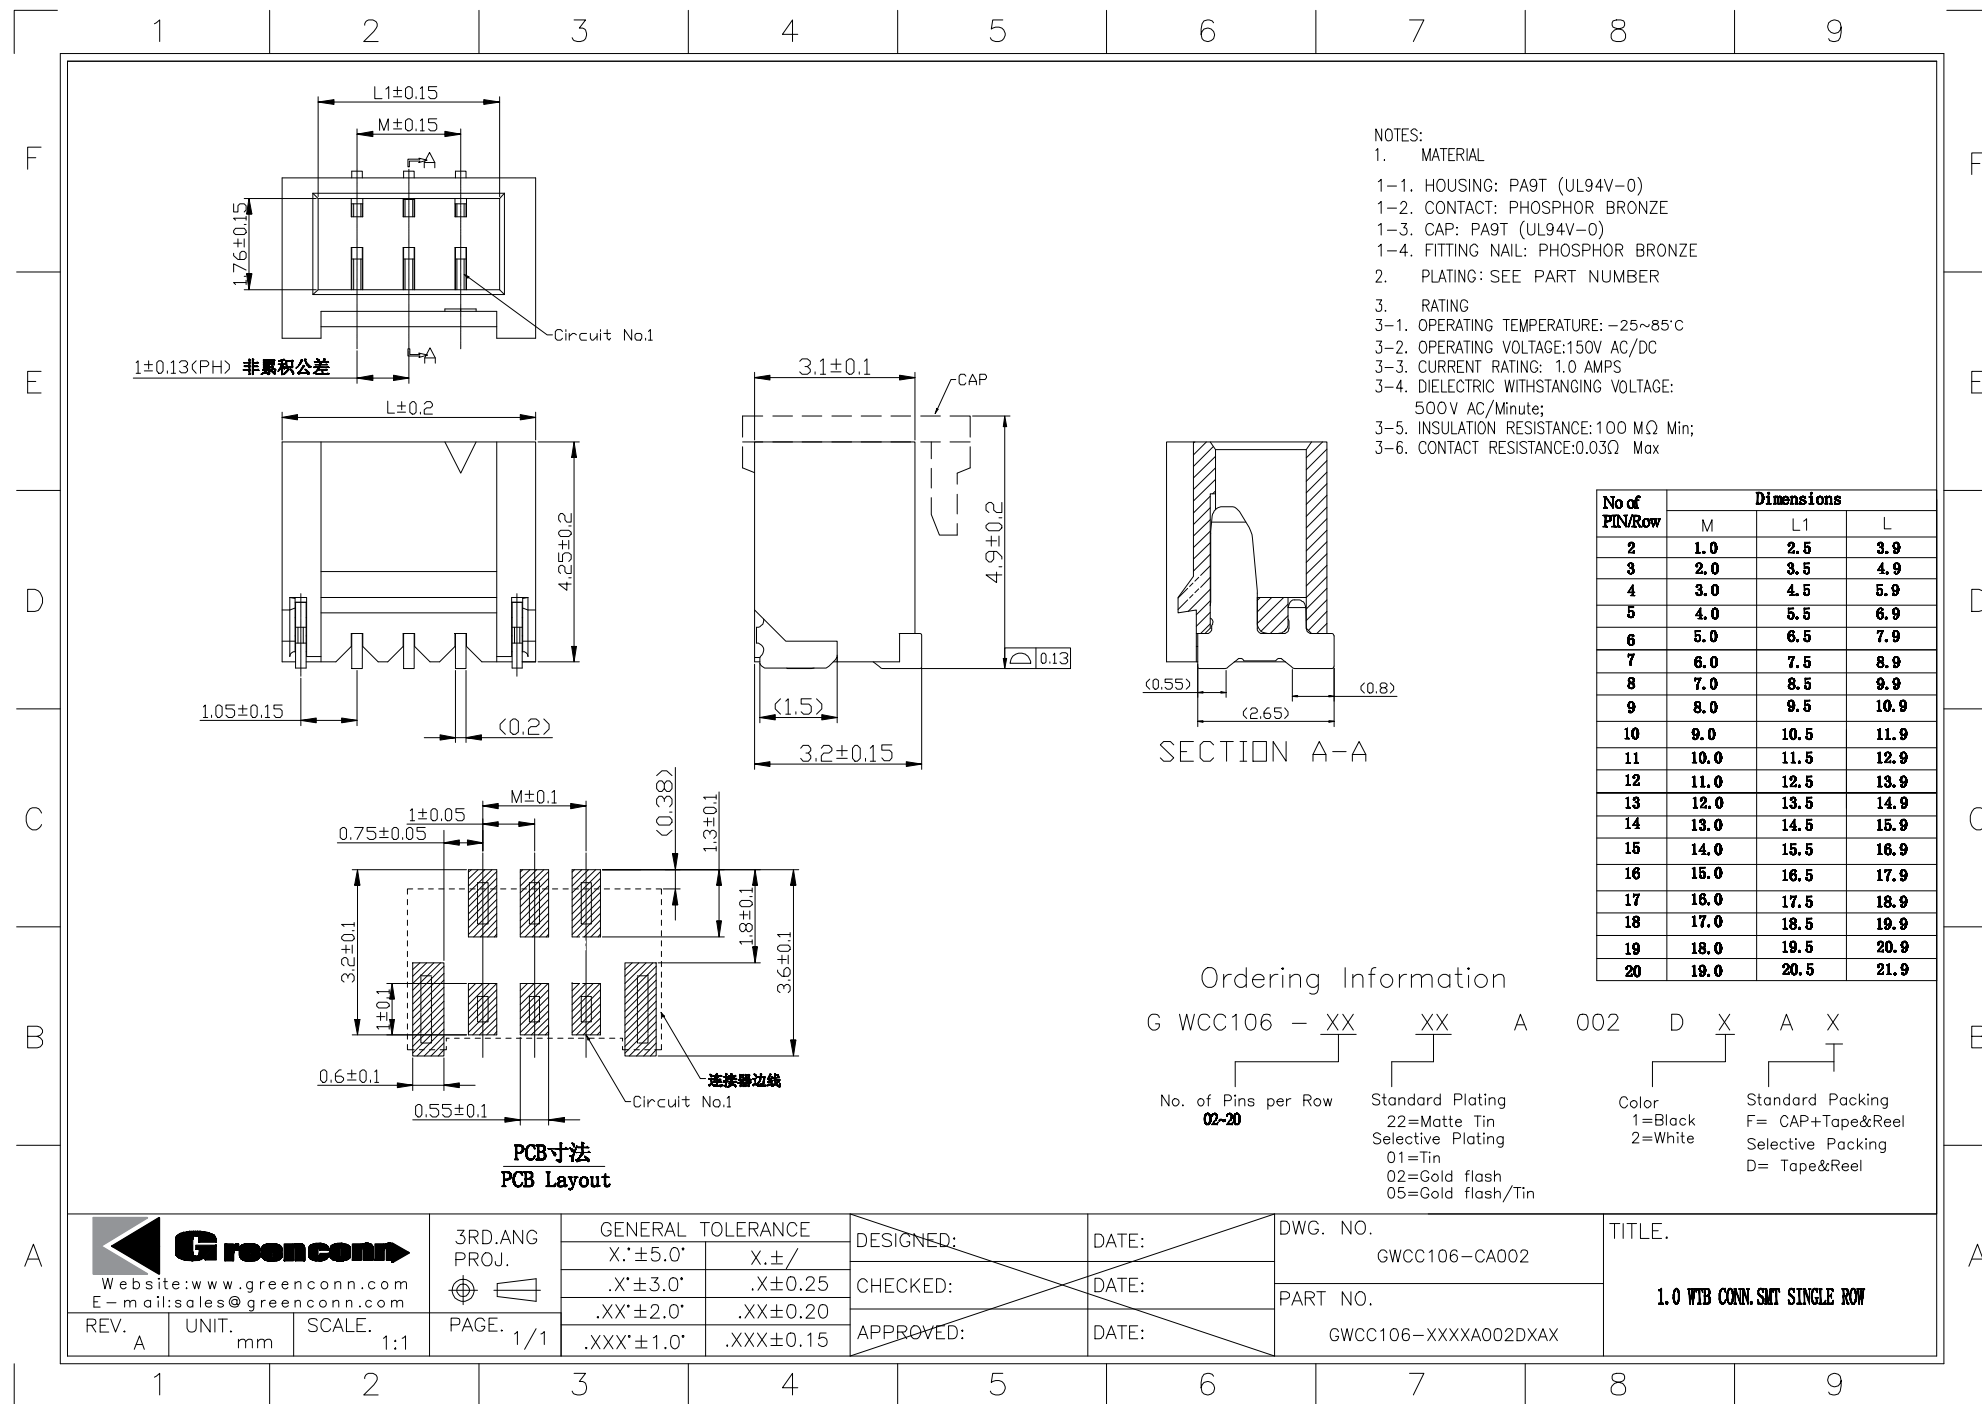
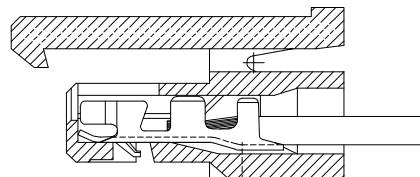


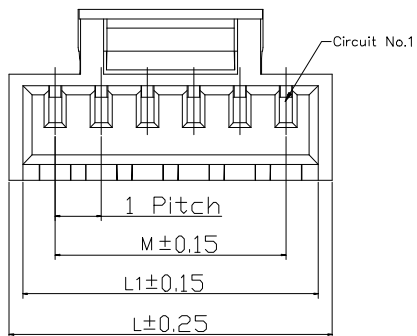

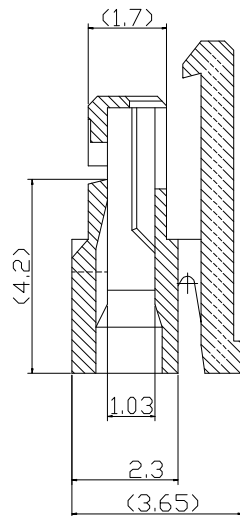


插线状态

- NOTES:
1. Insulator Material: PA66 UL 94V-0
 2. RATING
 - 2-1. OPERATING TEMPERATURE: -25~85°C
 - 2-2. OPERATING VOLTAGE: 150V AC/DC
 - 2-3. CURRENT RATING: 1.0 AMPS
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 2-5. INSULATION RESISTANCE: 100 MΩ Min;
 - 2-6. CONTACT RESISTANCE: 0.03Ω Max;

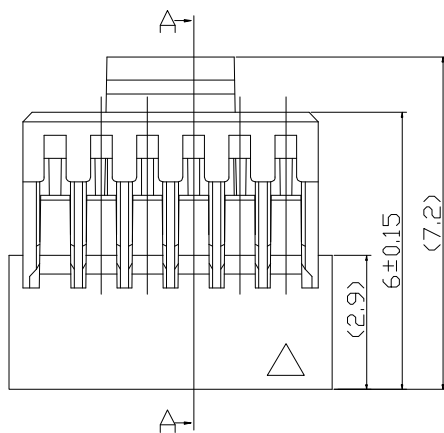

SECTION A-A



GWC051 - XX

A

X

No. of Pin/Row
02-20


Material/Color
M=Nylon66/White
M1=Nylon66/Black

PIN	M	L1	L
2	1.0	2.40	3.00
3	2.0	3.40	4.00
4	3.0	4.40	5.00
5	4.0	5.40	6.00
6	5.0	6.40	7.00
7	6.0	7.40	8.00
8	7.0	8.40	9.00
9	8.0	9.40	10.00
10	9.0	10.40	11.00
11	10.0	11.40	12.00
12	11.0	12.40	13.00
13	12.0	13.40	14.00
14	13.0	14.40	15.00
15	14.0	15.40	16.00
16	15.0	16.40	17.00
17	16.0	17.40	18.00
18	17.0	18.40	19.00
19	18.0	19.40	20.00
20	19.0	20.40	21.00



Website: www.greenconn.com
E-mail: sales@greenconn.com

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 / X. ?

.X 停 / .X ? .25

.XX 停 / .XX ? .20

.XXX 停 / .XXX ? .15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.



GWC051-HA

PART NO.

GWC051-XXAX


TITLE.

1.07TB CONN. SINGLE ROW HOUSING

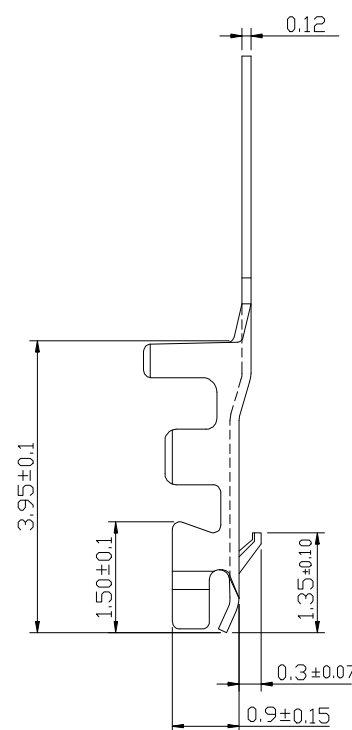
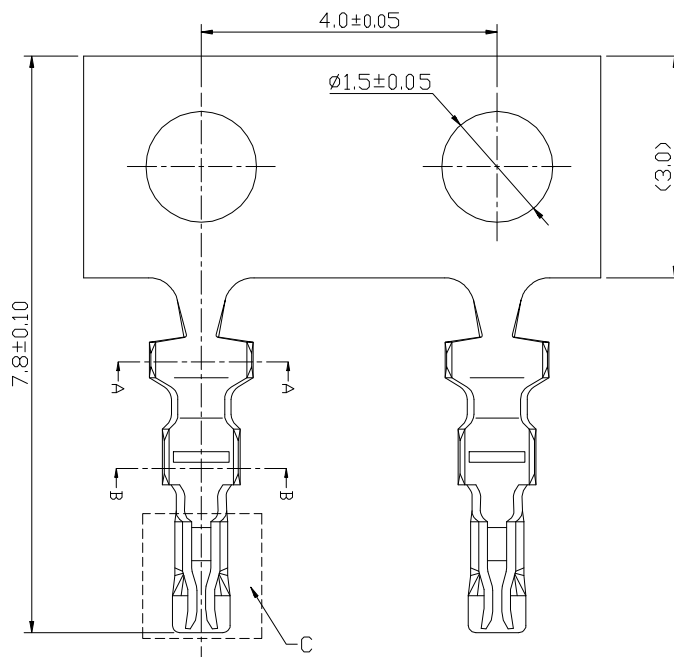


NOTES:


OPERATING TEMPERATURE: -25~85°C
 OPERATING VOLTAGE: 150V AC/DC
 CURRENT RATING: 1.0 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 INSULATION RESISTANCE: 100MΩ Min;
 CONTACT RESISTANCE: 0.03Ω Max;

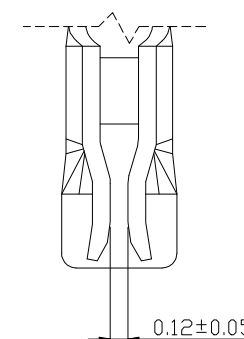

DETAIL: C SCALE 2: 1



SECTION A-A



SECTION B-B

Ordering Information

GRC114 - 01 XX AB

Standard Plating
 01=Tin
 02=Gold flash


Materials
 AB=Phosphor Bronze



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X. ?
.X 停 /	.X ? .25
.XX 停 /	.XX ? .20
.XXX 停 /	.XXX ? .15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRC114-T1

PART NO.

GRC114-01 XX AB

TITLE.

1.0 WTB CONN. PLUG CRIMP TERMINAL