


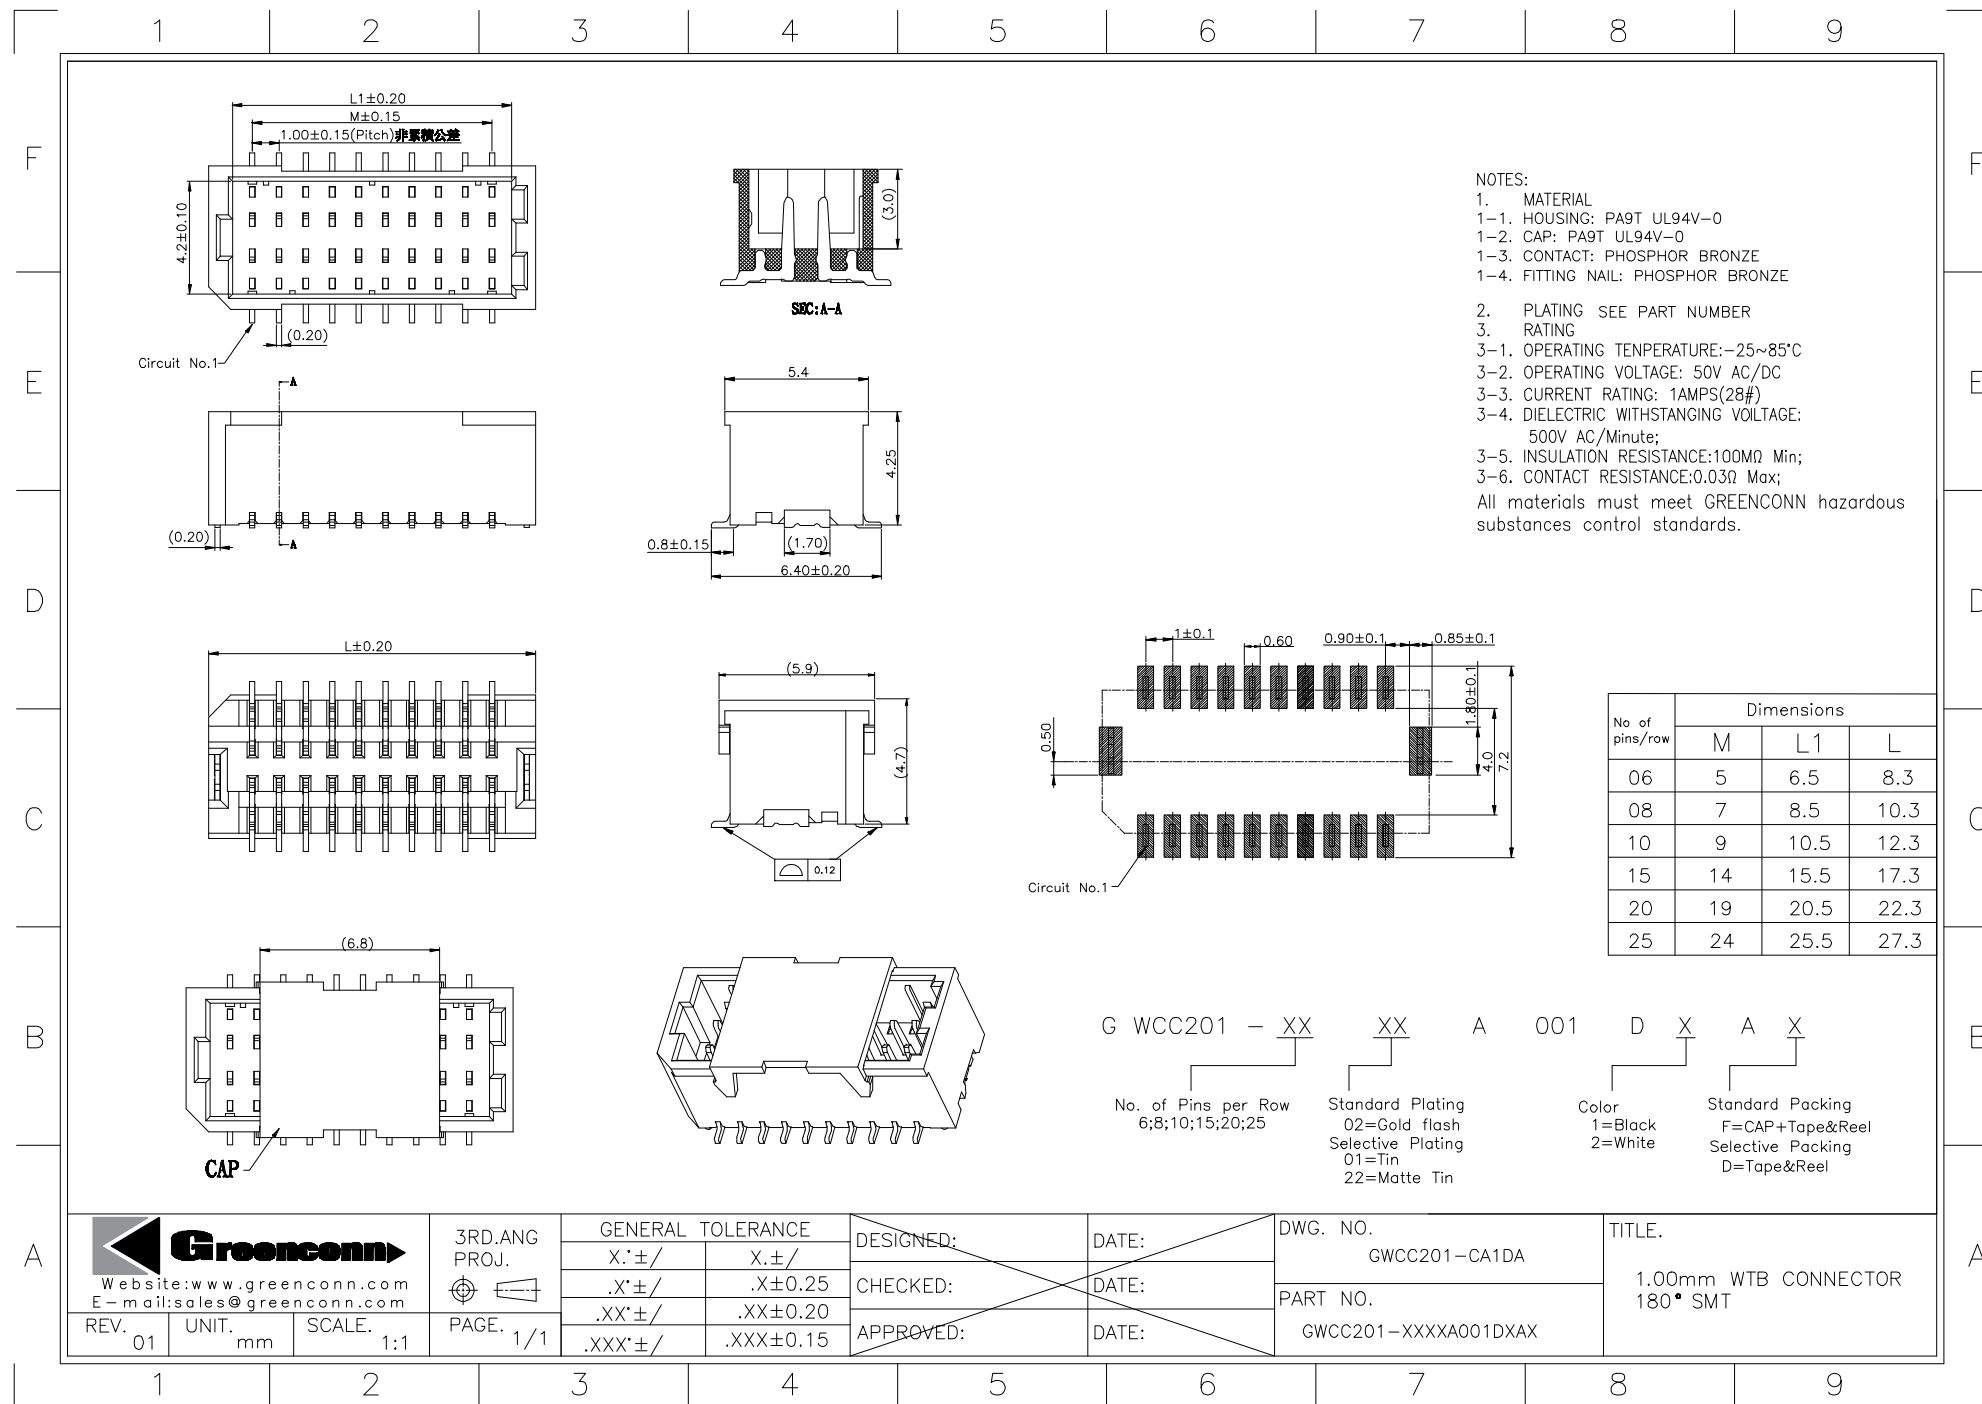


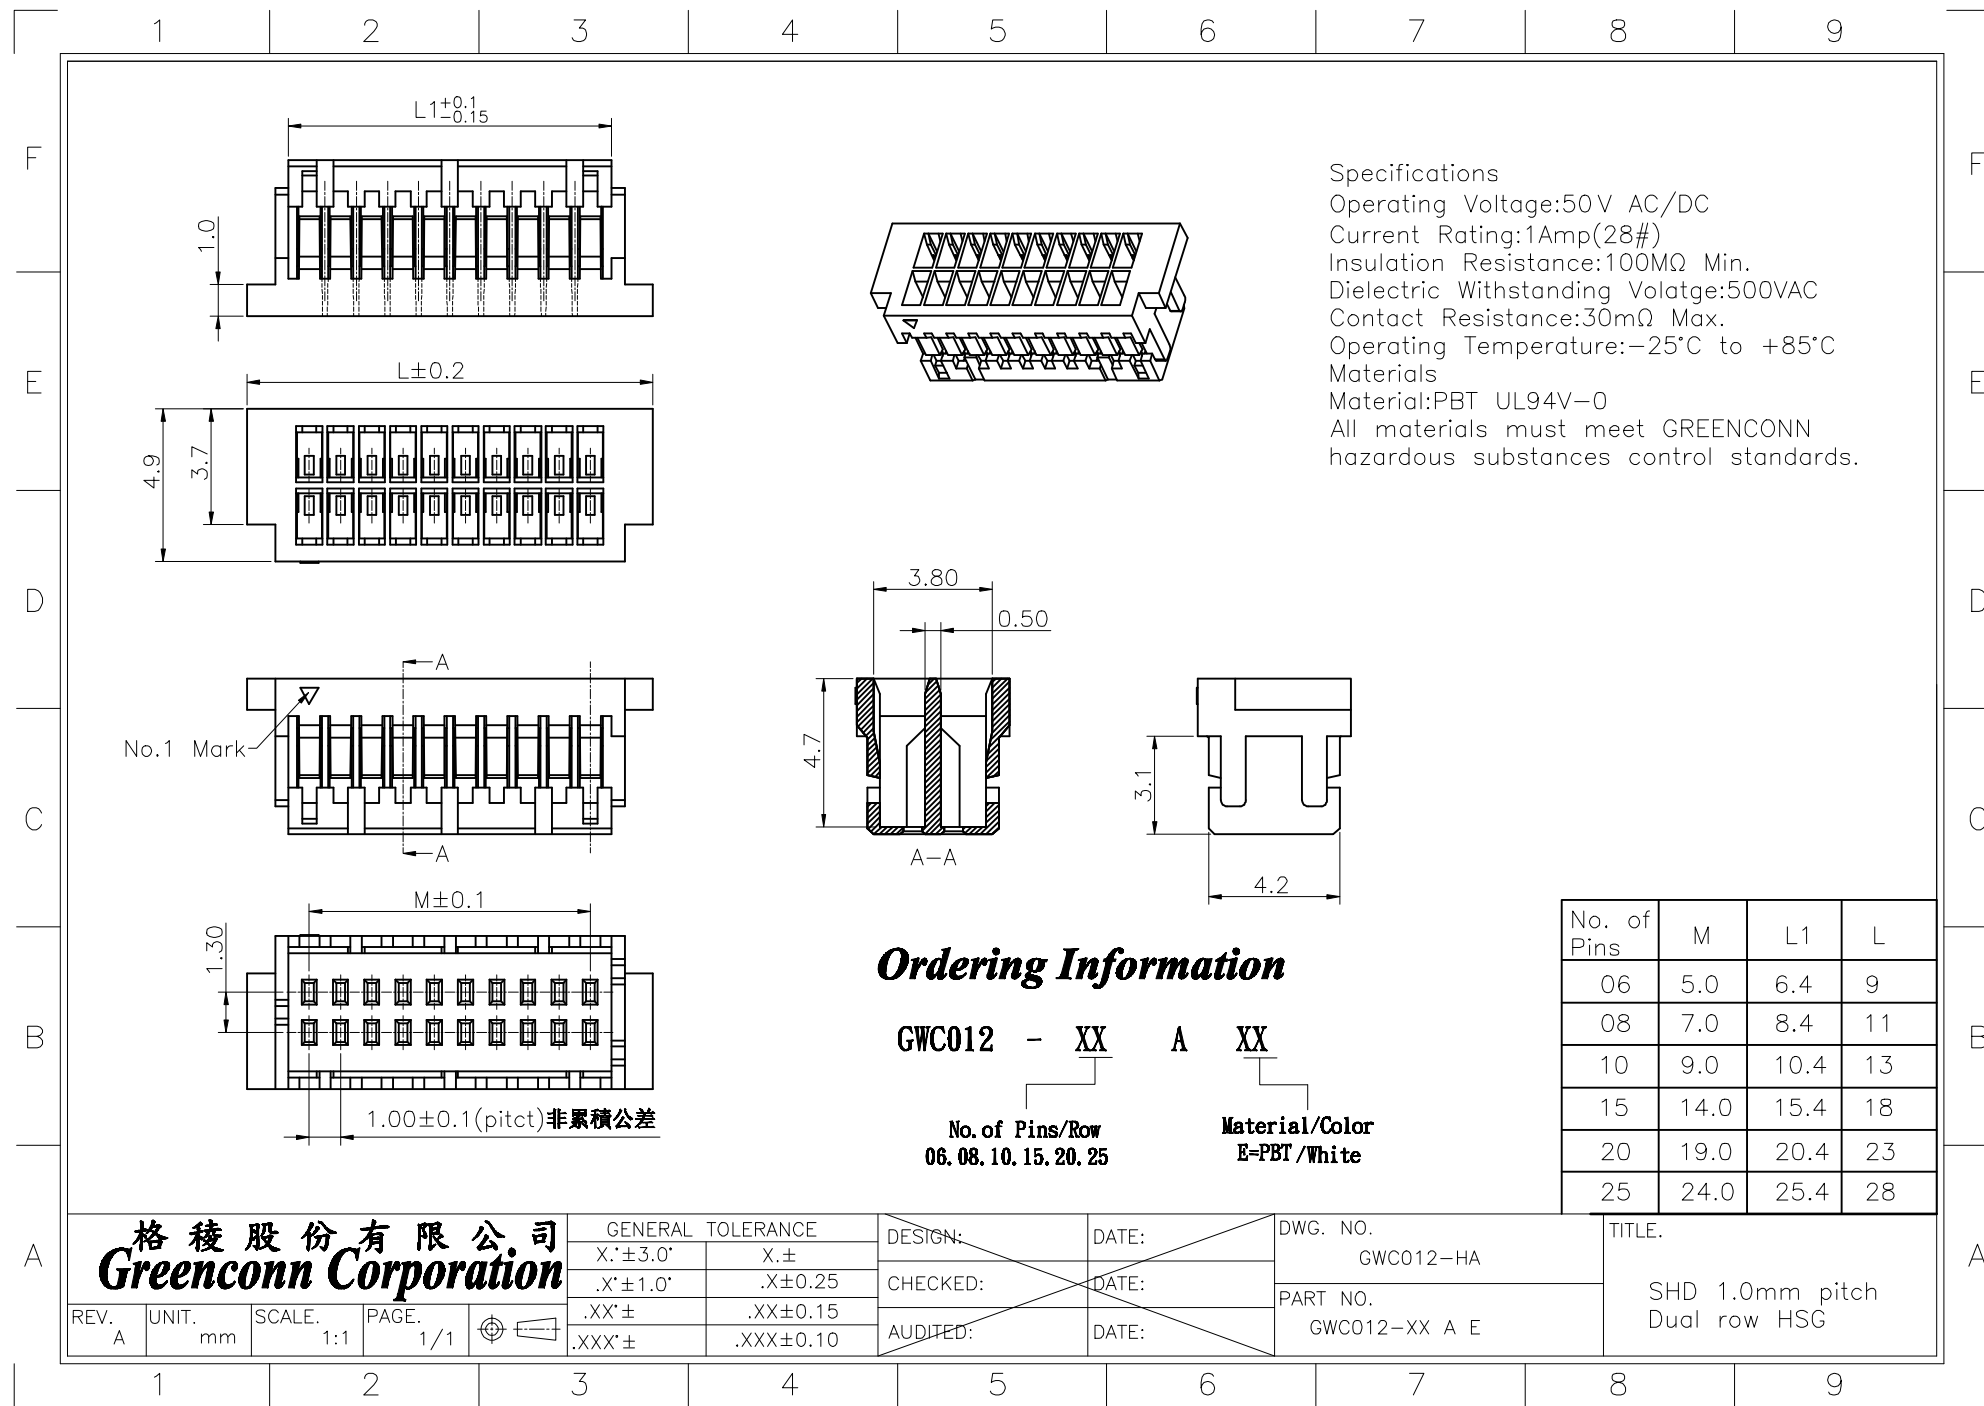

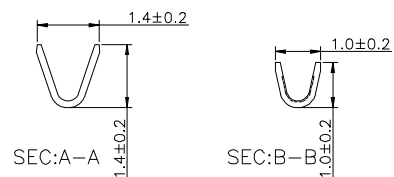

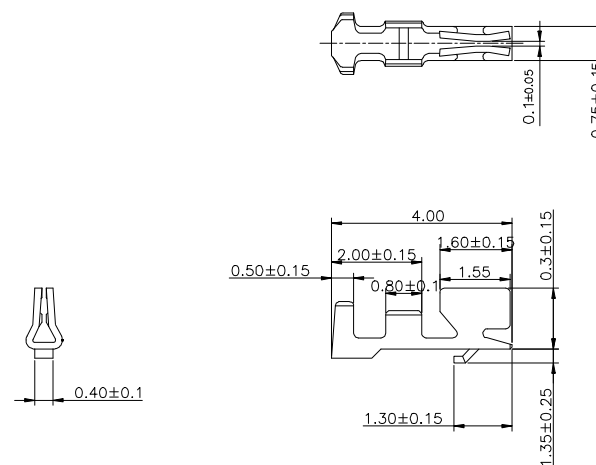

Ordering Information

GRC107 - 02 XX AB

Standard Plating
01=Tin

RATING
OPERATING TEMPERATURE: -25~85°C
OPERATING VOLTAGE: 150V AC/DC
CURRENT RATING: 1.0 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
800V AC/Minute;
INSULATION RESISTANCE:1000MΩ Min;
CONTACT RESISTANCE:0.03Ω Max;

格 菱 股 份 有 限 公 司 Greenconn Corporation					GENERAL TOLERANCE X.* ± 5.0° X. ± 0.30 .X* ± 3.0° .X ± 0.25 .XX* ± 2.0° .XX ± 0.15 .XXX* ± 1.0° .XXX ± 0.10		DESIGNED: DATE: CHECKED: DATE: APPROVED: DATE:		DWG. NO. GRC107-T2 PART NO. GRC107-02 XX AB		TITLE. 1.0T-端子	
REV.	B	UNIT.	mm	SCALE.	1:1	PAGE.	1/1					